

特性:Specifications:

电器:Electrical:

接触阻抗:Contact Resistance

50 milliohms MAX

耐电压:Dielectric Withstanding Voltage:

100 V AC AT Sea LevL

绝缘阻抗:Insulation Resistance:

100 MEGA ohms MIN

材料:Material:

塑胶:Housing:Hing Temperature Thermoplastics,

UL 94V-0 耐高温塑胶

端子>Contact: Copper Alloy 铜合金

铁壳:Shell: Copper Alloy 铜合金

电镀:Finish:

端子>Contact: Plated Gold in Mating Area;

Tin On Solder Talls

接触点镀金. 脚镀锡

铁壳:Shell:

Nickel/ Plating 镀镍

### Ordering Informating

X - 5 - XX

Contact plating

01-Gold Flash

02-5u"Gold/ Tin


03-15u"Gold/ Tin

04-30u"Gold/Tin


X

Plastic Color

A=Black

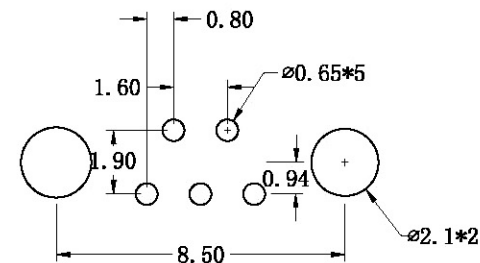

RECOMMENDED PCB LAYOUT

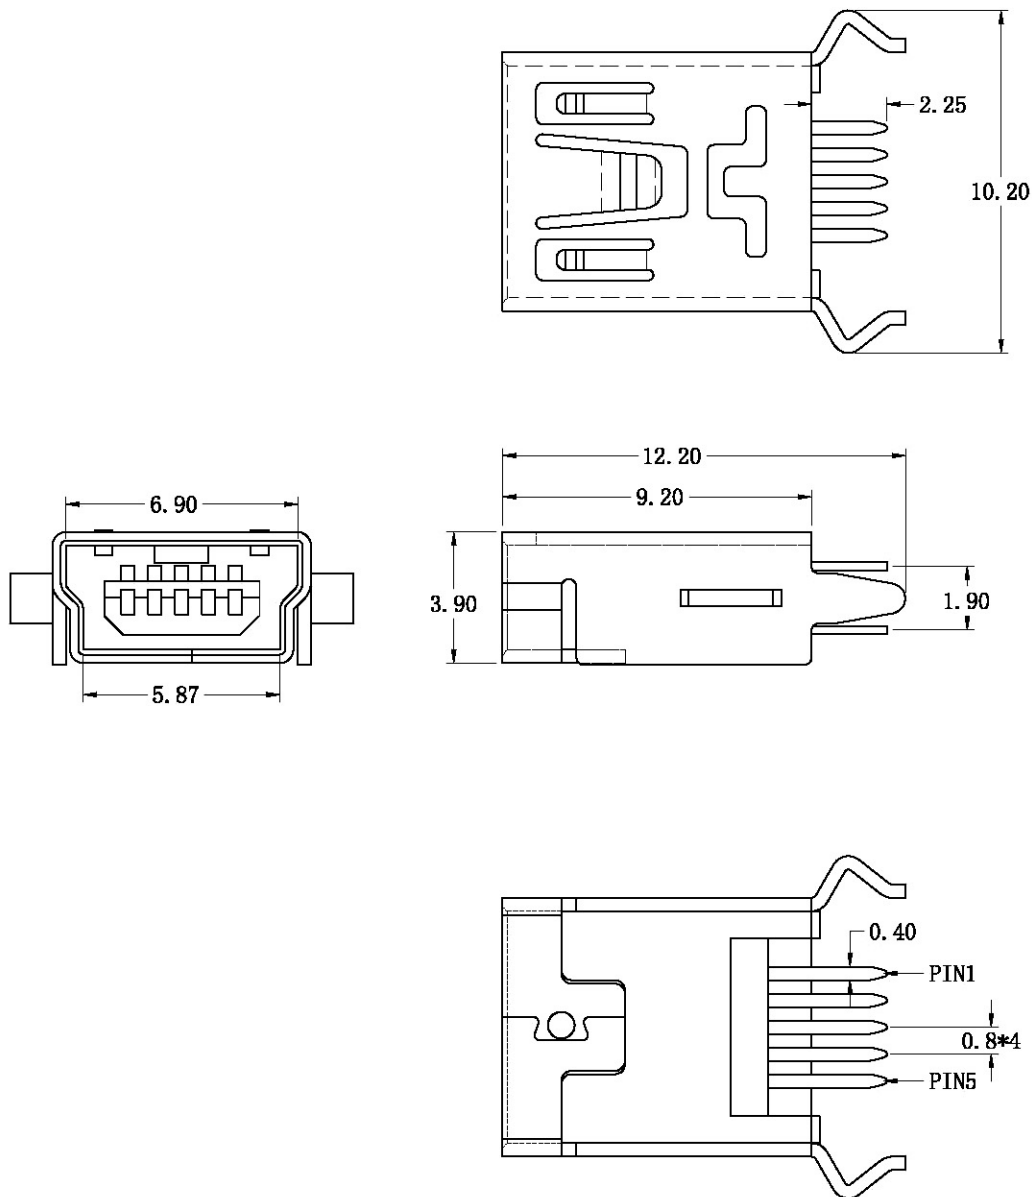

					成品图
品名	MINI USB B TYPE 5P 180度 母座	材质		单位	MM
图号	A004-2B-5D	图纸编号		比例	1:1
制图		审核		日期	2005.05.18