

Introduction

Allan

2023-06-14

Contents

1	Exectutive Summary	2
2	Introduction	2
2.1	Electricity	2
2.2	Swiss Grid	3
2.3	The Network	4
2.4	Law, limits and regulations	5
2.5	Overview of the network	7
2.6	My questions	8
3	Preliminary Data Anylsis	8
3.1	Overview of the data	8
3.2	Data limitations	9
3.3	Data cleaning and pre-processing	9
4	EDA	9
4.1	Overall consumption and production for the country	9
4.1.1	Quick visualisation	10
4.1.2	Different levels of seasonality	11
4.1.3	STL Decomp and Residuals	18
4.1.4	Main insight from the overall Data	20
4.2	Second and Tertiary control	20
4.2.1	Positive and Negative Secondary control with trend	21
4.2.2	Positive and Negative Tertiary control with trend	22
4.3	Border	22
4.4	Foreign	22
4.5	Canton	22
4.6	Mapping	29

5	Forecasting	29
6	Conclusion and possible extension	29
7	References and Appendix	30

1 Executative Summary

Approach and Purpose

Master thesis, internship oriented Different subject Actual and related to my country

Analysis and Data Insights

Sissgrid comprendre ou est produite et consommée l'énergie Comment le réseau marche et ses complexité.
Production and consumption all over the country Different level of aggregation Seasonity

Recommendation and Suggestions

Forecast and risk

2 Introduction

2.1 Electricity

Electricity, its price, consumption and production are at the heart of current debates. Whether it's environmental issues linked to the climate crisis and over-consumption, the economic challenges posed by rising prices around the world, or political debates such as the blacklisting of Russia, a major producer of natural gas for Switzerland, following the war in Ukraine, electricity is a major source of concern in Europe today. Over and above these aspects relating to Europe in general, Switzerland could be facing a real electricity shortage problem, given its dependence on imports. This is the point made by *l'economiesuisse* in [this article](#), which states that :

“Une pénurie d'énergie l'hiver prochain: tel est le scénario que nous devons éviter par tous les moyens. Une telle situation serait dévastatrice pour l'économie. Dans le dossier «Sur le front de l'énergie», economiesuisse commente l'actualité et évalue les nouveaux développements sous l'angle économique.”

The situation in Switzerland is complex and unique. Situated at the center of Europe, it can easily take advantage of imports and exports with its neighbours. What is more, Switzerland is a country with a lot of nature, lakes and mountainous regions, so it can use its topology to its advantage. Despite these advantages, and despite the fact that Switzerland still produces more electricity than it consumes, it cannot do without the help of its neighbours for its electricity production, particularly given the seasonal nature of this resource and the difficulty of storing it. Indeed, while Switzerland manages to be self-sufficient during the summer period (May to October), which is characterised by high production and lower consumption, the picture is different in winter: with consumption up by around 25% compared with the summer, coupled with a drop in local production due to lower river flows in winter, Switzerland has plenty to worry about. In fact, RST rightly points this out in its [article](#) on the shortage that could affect Switzerland during winter.

Beyond the purely economic aspect, the ecological component of electricity consumption and production is coming back more and more: fossil fuels to be banned, a desire to get out of nuclear power and the will to invest massively in green, renewable energies have invaded Switzerland. However, the will to do the right thing is not enough: we need to find the right compromise between the ecological transition and the needs of the population. Whether we like it or not, Swiss electricity needs will always take precedence over environmental issues.

It's the latter that we're going to focus on in this paper: **electricity in Switzerland, where is it consumed or produced, and why? What are the main factors governing the grid?** To answer this question, we will be using data provided by Swissgrid, the company that manages all electricity transmission in Switzerland.

2.2 Swiss Grid

As previously stated, our main task will be to analyze the data provided by Swissgrid in order to better understand what drives the network. Once done, we'll try to interpret these results in order to build a prediction model for the same data at different time scales. Before we can use their data, it is important to understand who Swissgrid is and what role it plays. Here are some of the main components that make up the company:

Generation

Despite its essential role in the transmission of electricity, it is important to emphasise that Swissgrid does not produce any electricity. Its sole role is to transport electricity between power plants and consumption areas via its network. Its mission, in addition to supplying energy where it is needed, is to ensure the stability of the grid: the quantity injected into the grid must therefore be re-evaluated according to demand at all times.

Grid operation

For the grid to function properly, it is essential that production and consumption are always in balance: Swissgrid must therefore ensure at all times that the energy consumed and produced are equal so that it can be transported safely. This is where their forecasting model comes into play and will be used to prevent any congestion or overloads. This information is generally transmitted directly to the power stations, which will increase or decrease power according to the desired volume.

Market development

Swissgrid is not only involved in the development and modernisation of its transmission system: it also ensures the development of the market. In fact it is responsible for minimising the costs associated with procurement, by varying suppliers abroad, for example. It is also Swissgrid that will make it possible, by means of ever more innovative infrastructures, to offer Swiss power stations new possibilities for transmitting the electricity they produce more easily.

Maintenance and repairs

Among its many tasks, one of the most essential remains the maintenance and upkeep of its infrastructure: Swissgrid must ensure that its pylons, lines, substations and so on are in good working order so that electricity flows safely. Divided into seven sites, they will be responsible for any repairs required.

Infrastructure

Swissgrid est responsable de la planification, du remplacement et de l'extension de toute l'infrastructure du réseau de transport. C'est une tâche ardue, étant donné qu'il existe déjà des congestions à l'heure actuelle, que de nouvelles centrales électriques sont raccordées au réseau et que la dynamique sur les marchés de l'électricité ne cesse de croître. Il convient donc de développer le réseau de transport, ce qui n'implique pas nécessairement la construction de nouvelles lignes, mais plutôt la modernisation ciblée aussi bien que le démantèlement de certaines parties du réseau.

Networking

As Switzerland is at the heart of Europe, it is an integral part of its interconnected network. This collaboration between countries enables Switzerland and Europe to avoid any congestion or network failures. Ideally located, Switzerland acts as a transit country, storing a large quantity of electricity that will pass through the interconnected network.

Consumption

Although consumers play a central role in network stability, they are not directly connected to the network. In the event of imbalance, Swissgrid will, for example, ask cold stores or incineration plants to modify their consumption in order to restore the desired voltage level. The only exception is the Swiss Federal Railways (SBB), which are directly connected to the transmission grid.

Switching substations

Les postes de couplage placés dans les sous-stations constituent des nœuds entre les lignes. Dans certaines installations, l'énergie est transformée et transmise à différents niveaux de réseau. En outre, les centres de conduite du réseau de Swissgrid déconnectent et raccordent des lignes dans les postes de couplage au moyen de manœuvres de couplage et dirigent ainsi les flux d'électricité.

Niveaux de réseau

Afin que les consommateurs finaux puissent utiliser l'énergie produite par les centrales électriques, la tension est réduite à 400 et 230 volts par le biais de sept niveaux de réseau. Font partie de ces niveaux les niveaux très haute tension, haute tension, moyenne tension et basse tension ainsi que trois niveaux de transformation reliant ces dernières.

Transmission grid

Il se compose de lignes à 380 kilovolt et 220 kilovolt. Alors que les lignes à 380 kilovolt sont majoritairement utilisées pour l'importation et l'exportation d'électricité, les grandes centrales électriques suisses injectent principalement leur énergie sur le réseau 220 kilovolt. Des tensions de l'ordre du kilovolt sont nécessaires sur le réseau de transport afin de pouvoir transporter l'énergie sur de longues distances avec le moins de pertes possible.

2.3 The Network

Il n'est pas visible, mais il est pourtant toujours présent: le courant. Nous l'utilisons naturellement et souvent de manière inconsciente. Le matin lorsque nous allumons la lumière, mettons la machine à café en marche ou quand nous écoutons la radio. Cette transformation est un véritable défi. Avoir la bonne quantité de courant sur le réseau en est un autre. À savoir livrer en tout temps la même quantité d'électricité que celle qui est utilisée au même moment. En effet, la consommation d'énergie et la production d'énergie doivent toujours être équilibrées. Swissgrid s'en charge. 24 heures sur 24. 7 jours sur 7. Afin que le réseau de transport puisse fonctionner, il est indispensable de maintenir un équilibre permanent entre production et consommation d'énergie. Cet équilibre garantit l'exploitation sûre et fiable du réseau électrique à une fréquence constante de 50 Hertz. Toutefois, le réseau de transport suisse peut connaître des fluctuations et des charges imprévues. Dans ce cas, les opérateurs doivent agir: où faut-il injecter davantage d'énergie afin que le réseau soit à nouveau équilibré et que la fréquence du réseau retrouve sa valeur de consigne de 50 Hertz? L'électricité ne pouvant pas être stockée sur le réseau de transport, il est nécessaire que l'injection de courant et le soutirage soient toujours égaux. En d'autres termes, la production et la consommation d'énergie doivent toujours être à l'équilibre. C'est cet équilibre qui garantit la sécurité et la stabilité de l'exploitation du réseau à une fréquence constante de 50 Hertz; il n'y a pas que le réseau de transport suisse qui est exploité à cette fréquence: c'est aussi le cas de tout le réseau interconnecté européen. De concert avec les autres gestionnaires de réseau de transport, Swissgrid veille à ce que cette fréquence puisse être respectée en permanence sur le réseau interconnecté. En Suisse, le courant est disponible en permanence. 24 heures sur 24, 365 jours par an. Mais ce n'est pas de toute évidence: notamment en hiver, les producteurs d'électricité font face à des défis particuliers. Le besoin en énergie augmente en cas de chute de neige, de verglas et de grand froid. Le problème: la production d'électricité en Suisse ne peut pas couvrir ce besoin supplémentaire en électricité. C'est la raison pour laquelle la Suisse est tributaire d'importations en hiver. En cas de fluctuations imprévues, les opérateurs des centres de conduite du réseau ont recours à l'énergie de réglage. Il s'agit d'énergie que les centrales électriques mettent en réserve pour Swissgrid et qui peut être utilisée si nécessaire. Les centrales électriques peuvent augmenter ou diminuer leur puissance à court terme, compensant ainsi l'énergie électrique manquante ou excédentaire. Sur le réseau interconnecté européen, l'équilibrage entre production et consommation s'effectue via un processus en trois étapes: la

première étape consiste à activer l'énergie de réglage primaire. En cas de fluctuations de fréquence, les turbines des centrales électriques dans toute l'Europe réagissent en augmentant ou diminuant leur puissance. Au bout de quelques minutes (5min environ), le réglage primaire est remplacé par le réglage secondaire. Ce dernier est réalisé par les centrales électriques suisses auxquelles Swissgrid envoie un signal automatique. Au bout d'un quart d'heure, les opérateurs utilisent manuellement l'énergie de réglage tertiaire. Ils donnent à certaines centrales électriques de Suisse ou de l'étranger l'instruction d'injecter plus ou moins d'énergie dans le réseau. Afin que l'équilibre du réseau puisse être assuré à tout moment, il est indispensable de procéder à une planification minutieuse avec les centrales électriques et les négociants d'électricité. Swissgrid est chargée de maintenir constamment le réseau de transport suisse à l'équilibre. C'est pourquoi les centrales électriques et les négociants d'électricité sont également tenus de toujours injecter dans le réseau, c'est-à-dire produire ou acheter, la même quantité d'énergie que celle qu'ils vendent.

Le réseau en quelques chiffres :

- Voltage of 380 and 220 kilovolts
- 250'000 kilometres long (6x around the world, the entire electrical network)
- 6'700 kilometres long (length of transmission network lines only)
- 12'000 pylons
- 147 substations
- 41 cross-border lines
- 2.5 billion Swiss francs of planned investment

2.4 Law, limits and regulations

Champs électromagnétiques Quand on parle de lignes électriques ou d'appareils électriques, le sujet des rayonnements électromagnétiques et de leurs risques potentiels revient souvent. Ces rayonnements sont à proprement parler des champs électriques et magnétiques. Des valeurs limites nous protègent des effets négatifs pour la santé. Les valeurs limites en Suisse font partie des plus strictes au monde.

La valeur limite d'immissions de 100 microteslas pour les champs magnétiques protège en particulier des atteintes à la santé scientifiquement reconnues. Elle s'applique partout où des personnes pourraient séjourner. La Loi suisse sur la protection de l'environnement exige en outre de protéger également la population des risques pour la santé aujourd'hui non avérés mais envisageables. C'est à cela que sert la valeur limite de l'installation de 1 microtesla. Elle s'applique partout où des personnes séjournent durablement, par exemple dans les salons ou les chambres, les écoles ou les aires de jeux. C'est une des valeurs limites les plus strictes en Europe. Les deux valeurs limites s'appliquent pour la charge maximale d'une ligne.

Bruit

Des décharges électriques locales peuvent se produire au niveau des lignes électriques, notamment en cas de conditions météorologiques défavorables, par exemple en cas de pluie, de givre ou de neige mouillée. En électrotechnique, ce phénomène est appelé «décharge coronaire». Il peut générer des bruits décrits comme des grésillements ou des bourdonnements.

Une limite d'émission de 55 décibels dans les zones habitées (45 décibels durant la nuit) est applicable en Suisse et doit impérativement être respectée. Le niveau sonore d'une rue à grande circulation dépasse 80 décibels. Partout où cela est nécessaire, Swissgrid s'efforce de réduire ces effets coronaires par tous les moyens techniques possibles. Dans le cas des lignes souterraines, les bruits dus à l'effet de couronne disparaissent.

Environnement

L'étude de l'impact sur l'environnement (EIE) permet, dans le cadre de la procédure d'autorisation, de contrôler si un projet respecte les prescriptions légales sur la protection de l'environnement. Le contrôle

se base sur le rapport d'impact sur l'environnement (RIE). En tant que maître d'ouvrage, Swissgrid est responsable de l'élaboration et de la remise des documents du RIE. Toutefois, l'élaboration du RIE est en règle générale confiée à un bureau d'ingénierie indépendant et spécialisé. Différents aspects sont traités dans le rapport, dont le bruit, les rayonnements non ionisants, les eaux, les sols, les décharges désaffectées, les forêts, les biotopes et la végétation, la faune et ses habitats naturels, les paysages, les sites construits ainsi que les monuments historiques et les sites archéologiques.

Le suivi environnemental de la phase de réalisation (SER) traite et pilote les considérations environnementales lors de la construction et assiste la maîtrise d'ouvrage pour une réalisation du projet de construction conforme à la loi et respectueuse de l'environnement.

Procédures d'autorisation

Swissgrid est responsable de la planification et de la réalisation des lignes de transport. La procédure d'autorisation et d'approbation de la Confédération comprend six phases qu'il faut impérativement respecter. Celles-ci prennent en considération les demandes des différentes parties prenantes. De nombreux acteurs participent aux discussions. À la fin, ce sont les autorités qui décident dans quel corridor une ligne sera construite et quelle technologie sera employée.

Les 6 étapes en questions :

Préparation Lors de la phase préliminaire, Swissgrid élabore différents corridors de lignes câblées souterraines et de lignes aériennes pour la zone dans laquelle la ligne doit passer, et ce pour chaque projet de réseau. Swissgrid et les cantons concernés par le projet concluent un accord de coordination, qui garantit que les préoccupations des cantons sont prises en compte dès le début de la planification. Les variantes élaborées et la demande d'intégration du projet au plan sectoriel de la Confédération constituent la base pour le début de la procédure d'autorisation.

Plan sectoriel des lignes de transport d'électricité Le PSE est l'instrument de planification et de coordination principal de la Confédération pour l'extension et la construction de nouvelles lignes de transport. La procédure à deux étapes distingue la zone de planification et le corridor d'une nouvelle ligne. Un groupe d'accompagnement mis en place par l'OFEN, composé de représentants de la Confédération, des cantons, des organisations de défense de l'environnement et de Swissgrid, discute des variantes proposées et émet une recommandation. La décision est conditionnée par le Modèle d'évaluation pour lignes de transport de la Confédération. Il tient compte des aspects techniques, de l'aménagement du territoire, de l'environnement et de la rentabilité. Les parties concernées peuvent prendre position dans le cadre d'une consultation publique. Le Conseil fédéral définit la zone de planification, le corridor et la technologie (ligne câblée souterraine ou aérienne) de la future ligne.

Projet de construction Lors de cette phase, Swissgrid élabore un projet de construction concret dans le respect du corridor de planification défini par la Confédération. Le tracé précis de la ligne, les délais et les coûts sont définis, ou des négociations concernant les droits de passage ont lieu. Swissgrid implique une commission consultative pour tenir compte des demandes de la population et d'autres parties prenantes dans la planification du projet. À la fin de cette troisième phase, Swissgrid dépose une demande d'approbation des plans pour le projet de réseau concerné auprès des autorités compétentes.

Procédure d'approbation des plans À la fin de l'étude de projet, Swissgrid dépose la demande de permis de construire auprès de l'Inspection fédérale des installations à courant fort (ESTI). Elle comporte le dossier d'approbation des plans et un rapport d'impact sur l'environnement. Le projet est ensuite mis à l'enquête publique. Les participants et les personnes concernées peuvent désormais faire opposition auprès de l'ESTI. Si l'ESTI ne parvient pas à régler les différends, l'Office fédéral de l'énergie poursuit les négociations. À la fin de cette phase, les autorités accordent le permis de construire à Swissgrid ou édictent des exigences supplémentaires qui doivent être prises en compte dans la planification du projet.

Procédures juridiques Lorsque le permis de construire a été accordé pour le projet de réseau, cette décision peut faire l'objet d'un recours par les autorités, les associations ou les parties directement concernées. Le Tribunal administratif fédéral et le Tribunal fédéral décident alors si les décisions de l'administration fédérale sont légales et si le droit a été correctement appliqué dans le cadre de recours des parties concernées. Si les tribunaux donnent le feu vert, les travaux de construction peuvent commencer. Si le recours est accepté, le

projet retourne à la phase d'approbation des plans (phase 4), ou il faut recommencer la procédure de plan sectoriel (phase 2). Ces longues procédures juridiques retardent considérablement les projets de réseau.

Construction Les travaux de construction peuvent commencer lorsque le permis de construire exécutoire a été accordé, les appels d'offres ont été réalisés, les offres comparées et les lots attribués. Les dernières servitudes sont négociées et les contrats correspondants sont conclus. Le projet de réseau prend fin lors de la mise en service de la nouvelle ligne, ou après le démantèlement de lignes existantes devenues inutiles.

Actuellement, il faut compter 15 ans entre le début du projet et la mise en service de la ligne en question. Cependant, des oppositions et des décisions juridiques prises à un stade tardif entraînent fréquemment un retard important des projets, qui peuvent prendre jusqu'à une trentaine d'année.

La modernisation de l'infrastructure de réseau est essentielle à la réussite de la stratégie énergétique de la Confédération. Or, le développement du réseau ne peut pas suivre le rythme de l'évolution des énergies renouvelables. De plus, nous sommes aujourd'hui déjà confrontés à des congestions structurelles dans le réseau de transport. Swissgrid doit demander régulièrement aux exploitants de centrales électriques de restreindre leur production. C'est la raison pour laquelle il est primordial d'accélérer le développement du réseau par des procédures d'autorisation et d'approbation efficaces. Swissgrid a défini tous les projets de réseau indispensables pour un réseau de transport suisse sûr et fiable dans son «Réseau stratégique 2025».

2.5 Overview of the network

Main source of production

L'électricité consommée en Suisse en 2021 provenait à 80% des énergies renouvelables selon [la confédération](#) (production + importation)

Concernant la production uniquement :

- central hydraulique (61,5%) 682 centrales hydrauliques
- centrales nucléaire (28,9%)
- La part des nouvelles énergies renouvelables (énergie solaire, éolienne, biomasse et petite hydraulique, 7.7%)
- agents énergétiques fossiles (1.9%)
- 29.7% production vs 70.3% importation

L'électricité produite en Suisse est issue à 61,5% de la force hydraulique, à 28,9% de l'énergie nucléaire, à 1,9% des énergies fossiles et à 7,7% environ de nouvelles énergies renouvelables (mix de production suisse 2021. Voir à ce propos: statistique de l'électricité sous le lien ci-après). Mais la Suisse ne consomme pas que de l'électricité d'origine indigène. Il existe un commerce actif avec l'étranger dans le cadre duquel l'électricité est importée et exportée physiquement, indépendamment du négoce des garanties d'origine entre les États. De ce fait, le mix de production suisse ne correspond pas à la composition moyenne de l'électricité livrée (mix des fournisseurs suisses).

Au niveau des mesures prises en charges pour les confédération :

- diminuer de 43% la consommation d'énergie par habitants d'ici 2035 par rapport à 2000
- développer au maximum les énergies renouvelables
- abandon progressive du nucléaire.

trend and seasonality

En Suisse, la consommation d'énergie par habitant baisse, pour sa part, depuis des années: bien que la population ait augmenté de 28,7% entre 1990 et 2020, la consommation d'énergie a diminué de 5,9% au cours de la même période.

What thrives the consumption

Different cons and prod around the country. Depend mainly on : density pop, size, activity, landscape.

Seasonality effect for both prod and cons.

2.6 My questions

Les risques, se qui régulent le marché, qui sont les principaux consommateurs et producteurs. L'exploitation du réseau de transport est planifiée à long terme. Plus d'un an à l'avance, les opérateurs établissent déjà un premier pronostic sur la situation de réseau attendue dans le centre de conduite du réseau d'Aarau à l'aide d'un modèle de réseau. La planification tient compte des révisions et des réparations des centrales électriques ou des lignes, par exemple. Ainsi, les mises hors service d'éléments du réseau ont des répercussions sur les capacités de transport. Faire un modèle de prévision.

La planification de l'exploitation du réseau est affinée en continu: la situation de réseau attendue est régulièrement recalculée, à savoir un an, un mois, une semaine, deux jours et un jour avant l'exploitation en temps réel.

Peut être intéressant de faire pareil.

3 Preliminary Data Anylsis

3.1 Overview of the data

First, we have data from Swissgrid regarding the energy network :

- Date : A file per year since 2009
- Time : Timestamp of 15min or 1hour (only overall for 1h)
- Total cons for end user only : are not included : grid losses, energy consumed for power plant's own requirements or to drive the pumps in pumped storage hydro power plant.
- Total prod/cons for Switzerland : everything consumed/fed in the network
- Secondary control : positive and negative energy within 15min
- Tertiary control : positive and negative energy after the first 15min
- Vertical load Swiss transmission grid : will not be used
- Net outflow of the Swiss transmission grid : will not be used
- Grid feed-in Swiss transmission grid : will not be used
- Control energy prices : average price in CHF for the last 15min of control energy (rounded to 2 decimals) for second and tertiary control
- Cross border exchange : energy exchanged with bordered country (Austria, Germany, France, Italy)
- Import/export/transit : Transit is not included in the cross border exchange

- Cantons : Details of prod/cons per cantons (starts after 2015) grouped in 19 cantons
- Foreign territories : prod and cons for regions within the control zone of Switzerland but do not belong to its territory

We have a total of 65 variables with a total of 487872 observations.

Second, we got data from [gadm](#) providing maps and spatial data for many countries on 4 different levels. In our project, we will use the data for Switzerland on a Canton level.

3.2 Data limitations

As said, we only have data available for each cantons since 2015. Also, due to the density of each cantons, certain areas have been grouped together, meaning we do not have the detail for every cantons. (26 cantons grouped into 19 zones)

3.3 Data cleaning and pre-processing

Due to the importance of the number of variables, we have decided to create sub-dataset for every type of Data :

- Overall
- Cantons
- Borders
- Foreign
- Price

Every DataSet had been transformed into a tsibble, a new data structure that help and support with temporal data. One should look at [this paper](#) for further references. We used the timestamp of 15min to get a better understanding of the data and help us building stronger models and forecast.

Here is quick overlook of our dataset :

Dataset	No. observations		Name of the DS
Initial dataset	277'536	Combined all SwissGris's files from 2015	General_df
Monthly data	277'536	Monthly version of General_DF	General_dfM
Cantons'Data	4'995'648	Combined Data for Cantons from 2015	Canton_df_long
Swiss map's data	123,156	Contain data to map Switzerland	gadmCHE1

A new tidy data structure to support exploration and modeling of temporal data

4 EDA

4.1 Overall consumption and production for the country

4.1.1 Quick visualisation

Now that we have better view of the network and where the data come from, let's dive int and see exactly what kind of data we will use. You can see below the first 10 rows of the `general_df` data containing all the general information at the country level :

time	end_users_cons	energy_prod	energy_cons	pos_second	neg_second	pos_tertiary	neg_tertiary
2015-01-01 00:15:00	1790683	1697772	1922526	37500	0	0	0
2015-01-01 00:30:00	1777126	1686388	1907138	22200	0	0	0
2015-01-01 00:45:00	1807976	1724777	1940146	36100	0	0	0
2015-01-01 01:00:00	1784944	1690007	1918599	16400	0	0	0
2015-01-01 01:15:00	1813997	1681642	1954830	52700	0	0	0


In the following exploration data analysis, we will only take the `energy_cons` and `energy_prod` as total of consumption and production. A important component when working with times series is the missing value. Indeed, many packages used in R can not deal NA. It is also the case for the `tsibble` package which we will use throughout this paper. For further information on this new tidy data structure, one can refer to this [article](#) on the subject.

After a quick check, we see that we have a total of missing value of :

```
sum(is.na(general_df))  
#> [1] 0
```

We now know that no data is missing and that we have an observation for every 15 minutes from January 1, 2015 to the end of 2022. In the subsequent analysis, we will also transform our data into hourly (`hourly`), daily (`date`) and monthly (`month`) observations to obtain different insight.


We can now have a first look on the Daily Consumption :

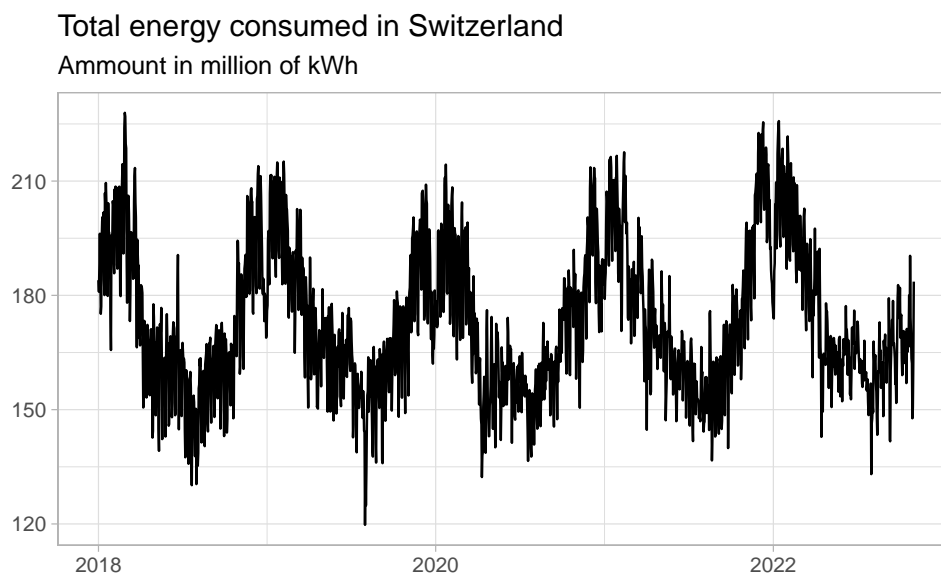

We can already see a strong yearly seasonality effect : for each year, we see peaks at the end/begging of the year (winter season) with big decrease during summer. We can also observe numerous variations over shorter periods, indicating possible seasonality on several levels. Giving the nature of the electricity, this results makes perfect sense : we can expect variation during day and night, weekday and weekend, winter

and summer. We will have to work with different time period to understand each of these seasonal effects. Finally, the chart shows high volatility with several peaks each year. Considering them as outliers would not make sense since they occur very often, we will instead try to find out if we can explain a pattern of increase/decrease in consumption on the total from the data at hand.

Let's now have a look on the Daily Production to see if we get similar results :

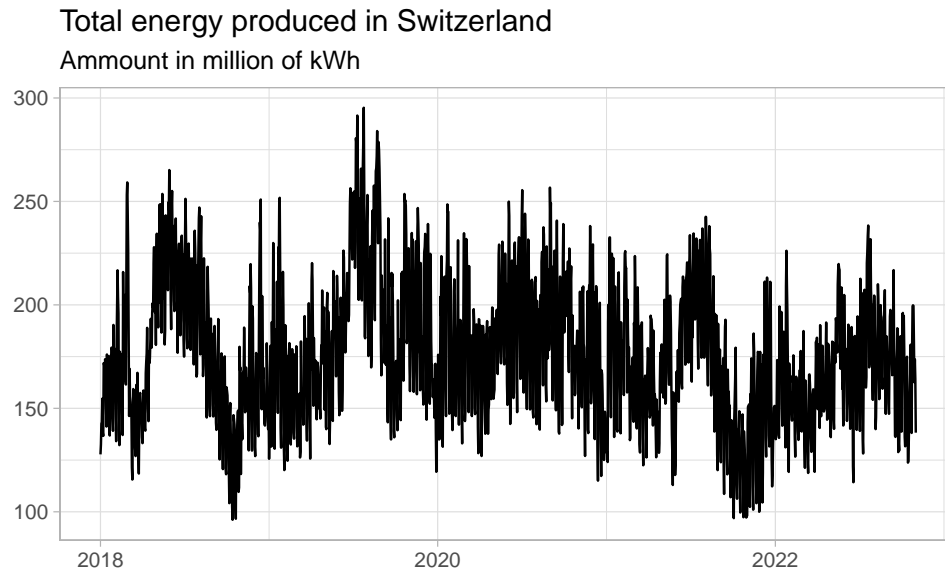


Exactly as for consumption, we can see a strong seasonality over time, also operating on different time period. One difference to note is the possible downward trend after mid-2019. The yearly seasonality pattern seems also less consistent over the years. Clearly, if we can affirm correlation between consumption and production, we already see they behave differently. We will try to understand and explain where the difference comes from. Finally, we see the same high volatility with several peaks each year we had for consumption.

4.1.2 Different levels of seasonality

One of the conclusions we were able to draw based on the previous graphs was the presence of different seasonality in the data. To understand the patterns, we will “zoom in” to see what is happening on shorter time period. (starting with a long period and then gradually reducing it)

4.1.2.1 Seasonality of the month over the year Our analysis starts with data grouped by month. Here is the graph monthly consumption :


Total energy consumed by Switzerland
Amount in million of kWh

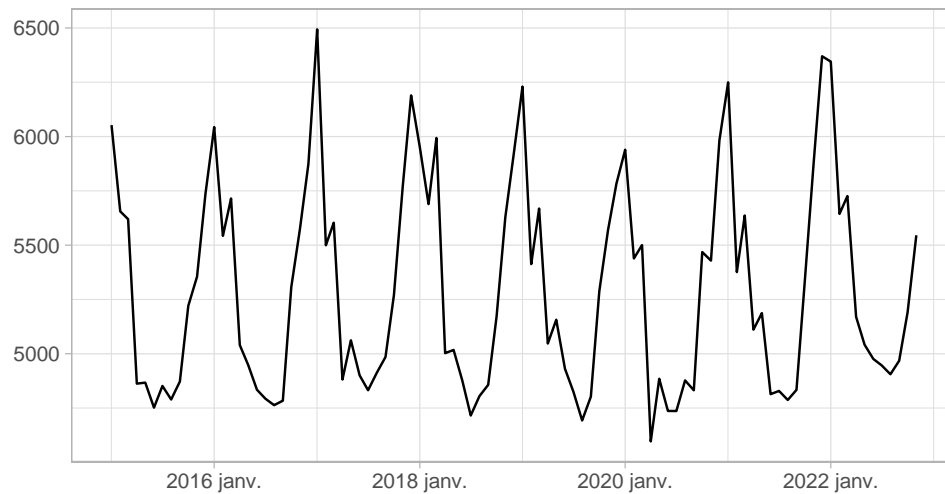

This clearly confirms what we have said previously :

- The levels of consumption does not vary over time.
- Significant difference between summer and winter, with a peak for consumption in December/January and the lowest in July/August.
- The covid had almost no impact on consumption (2020 is slightly lower than other years, but we can not see any significant difference).

Total energy produced by Switzerland
Amount in million of kWh

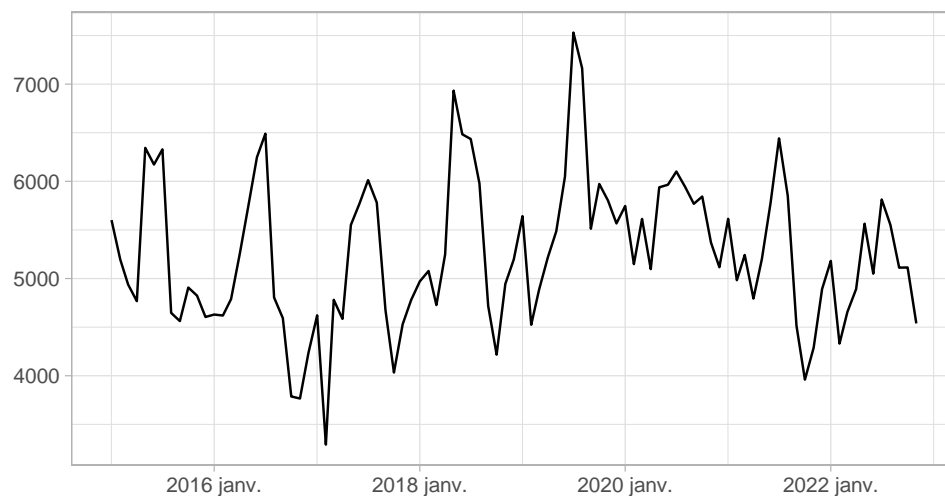


What we can extract from the chart :

- We can see more clearly the difference with consumption : we do not have the same regularity with seasonality. We can confirm peaks and drops with the season but with less regularity.

- If the general level of production is quite the same between the beginning and the end of the time period, we see a higher variance among the year.
- For the covid period (year 2020 in Switzerland) : we see a reduction in the seasonality, with significantly smaller peaks and falls throughout this year, with the old pattern appearing to return right after 2020.
- Finally, as mentioned in the previous section, there might be a general decrease in production after the highest point in 2019.


Here is an other view of the same data, grouped by month over the years :

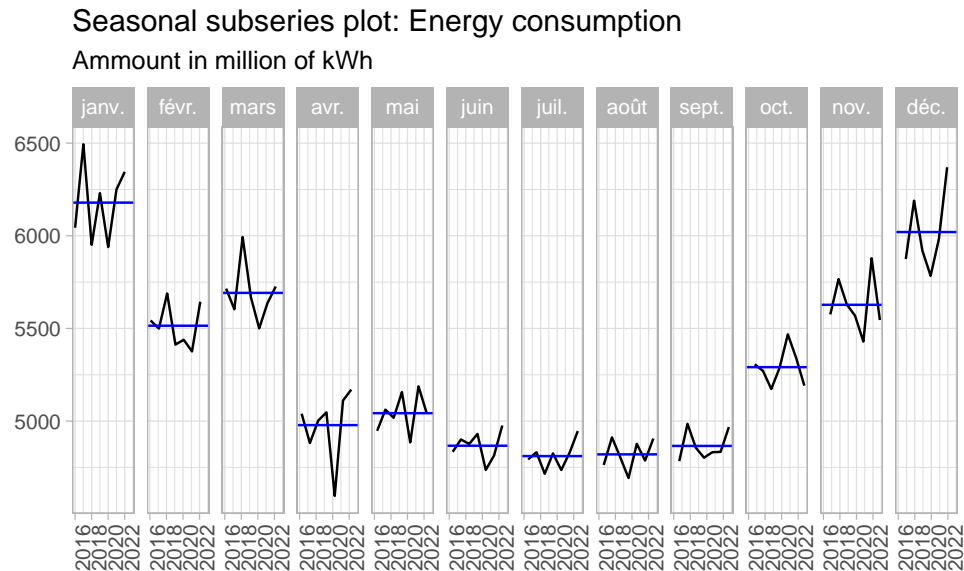

This graph allows us to better compare the differences between the months for each year. The consistency of dips and peaks between summer and winter is clearer than ever. We can also note that the average consumption value (blue line on the graph) shows us a generally low level over a longer period than we might have thought: we can see a drop from April to September, contrary to our first analysis which suggested only the months of July and August. As for the differences between the years themselves, the variance is not very large, so we can say that overall consumption has changed little since 2016. Finally, we note a significant drop between March and June 2020, most likely linked to Covid, which we were unable to see clearly in the previous graphs.

Seasonal subseries plot: Energy production

Amount in million of kWh

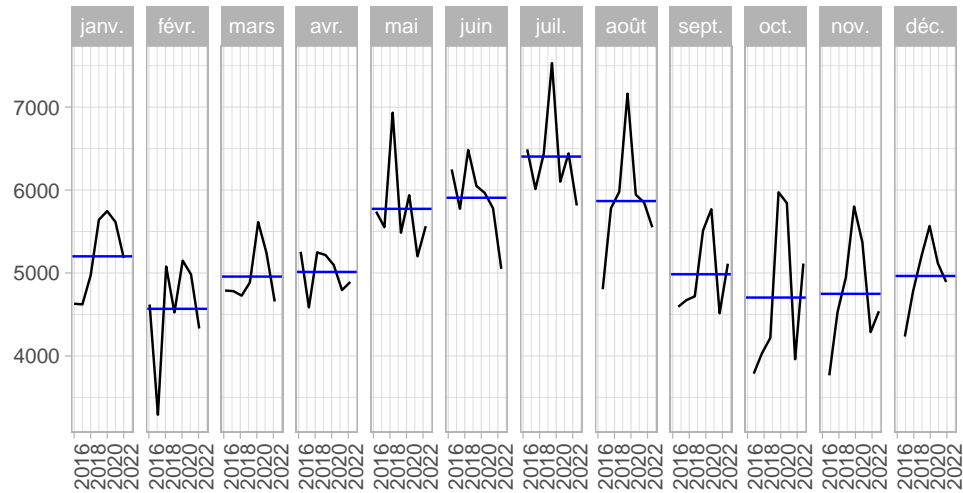


The first thing we notice is the very high variance within months among each year. Indeed, we can see many big drops and peaks for several periods, especially for February 2017 and for the end of 2019 in general. Clearly, the year has a significant impact on production, indicating that it depends on more than just population density or labor.

This high variance can also lead to misinterpretation of the graph: one might think that the average value of production (blue lines) does not vary significantly from one month to the next, compared with consumption. This is mainly due to the higher scale of the y-axis, caused by high volatility. The range of production (4,500 to 6,500) is even higher than that of consumption (4,600 to 6,400), also showing the strong importance of seasons.

4.1.2.2 Seasonality of the day over the week Now that we have a better understanding of the monthly seasonality, let's zoom in on weekly seasonality. To do so, we will take the hourly data in a shorter time period.

You can see here the chart of the consumption per hour for the month of January 2019 (2019-01-06 ~ 2019-01-30, to be exact)

Total hourly energy consumed in Switzerland
 Amount in million of kWh

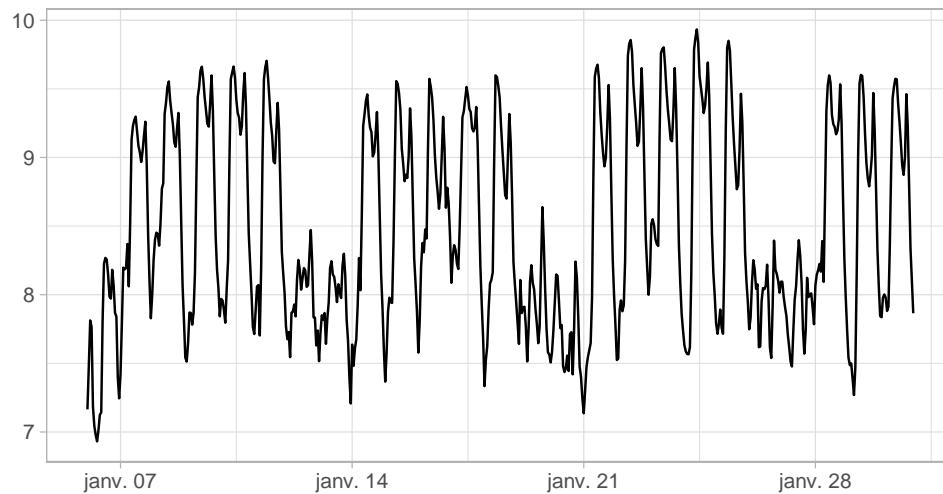


This graph shows us both weekly and daily seasonality :

We have peaks during the day (in the morning and a second peak in the late afternoon) and dips during the night, but also during the week, with higher volumes on weekdays with less than half for the weekend. There is no significant difference between the days of the week themselves. This can easily be explained but the weekly and daily agenda of most people : the peaks happens when poeple are awake and are working.

An interesting comparison is the small difference between weekend days and weeknights: the total amount consumed is almost the same, with some nights even exceeding weekend consumption. This suggests that the majority of consumption comes from companies and large institutes, and not from private individuals. Indeed, these two times of the week are marked by the absence of work.

It's important to note that we only have data for a specific month over a 6-year period : so while this gives us a general idea of consumption behavior throughout days and weeks, and we can expect it to be constant over the whole period, we can not yet be sure that this pattern is generalizable to every period.

As usual, let's now displays the same chart but this time for the production :

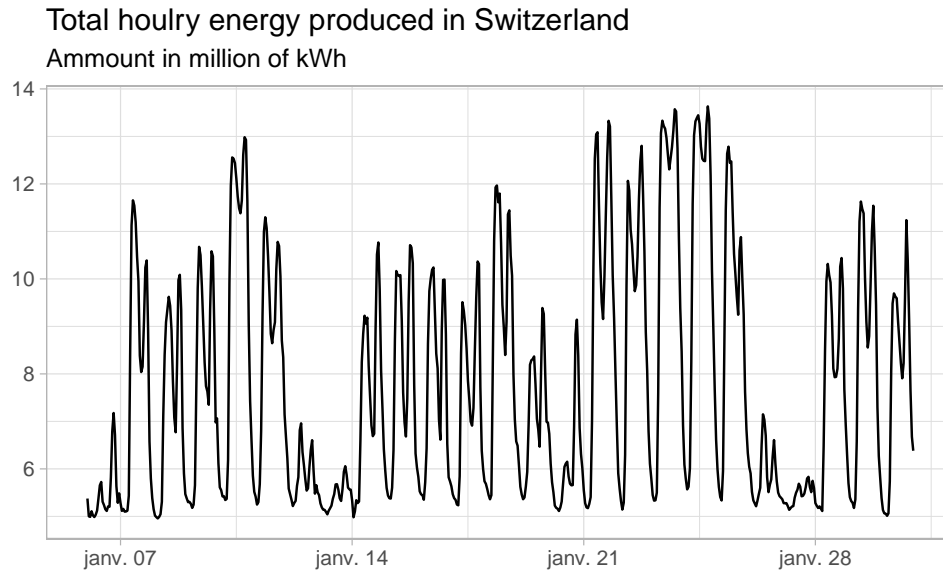

It gives us some very important indications. First of all, the production range is higher, which means that we produce too much during the day and not enough at night. This lack of electricity at night could be a choice, given that its price is very low and that importing electricity could be cheaper than producing it during a period of low activity.


In contrast to consumption, we have similar production on every night of the week (around 5 millions). Even lower than during the weekdays, the weekend is always higher than nights: the fact that production is low at weekends highlights human dependency. Indeed, if factories were 100% autonomous, we shouldn't see a drop in production at weekends. However, it remains to be seen whether this drop is due to a reduction in manpower or simply a choice on the part of the factories, since demand is much lower at weekends.

Generally speaking, we can see that production for this period is in line with consumption.

4.1.2.3 Seasonality of the hour over the day Our final zoom will focus on hourly/daily seasonality. As usual, we'll display the consumption graph first, before the production graph. Instead of a conventional graph, given the short period between observations (every hour), we have decided to use a heat map this time. This has enabled us to use all the data at our disposal, while giving us a clear model output. This will thus enable us to confirm the models studied over the whole period.

Global effect of the weekday on consumption

Energy consumed (in 10m of kwh)

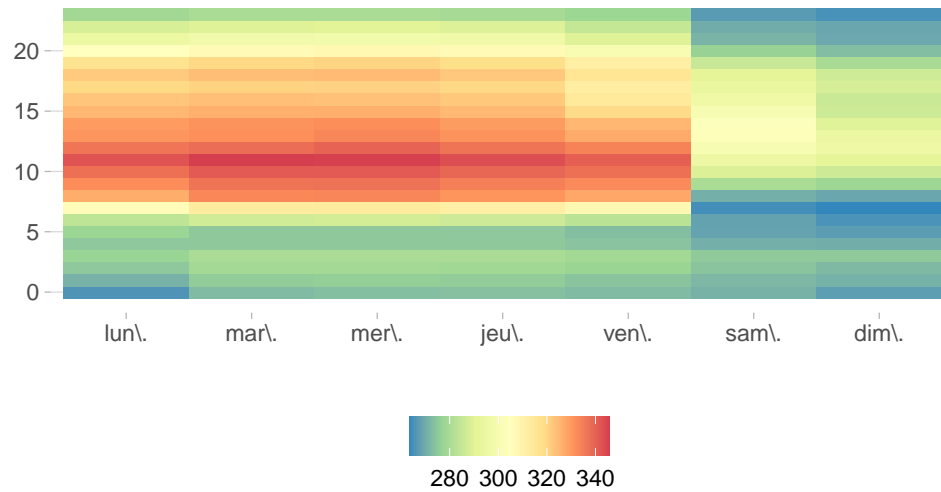


We can conclude that the trend is generalized over the whole period, with peaks around midday and a gradual decrease as the day progresses. Minimum consumption can also be generalized between nights and weekends. Electricity consumption in Switzerland is clearly in line with human activity.

Here is the second map, this time for production:

Global effect of the weekday on production

Energy consumed (in 10m of kwh)

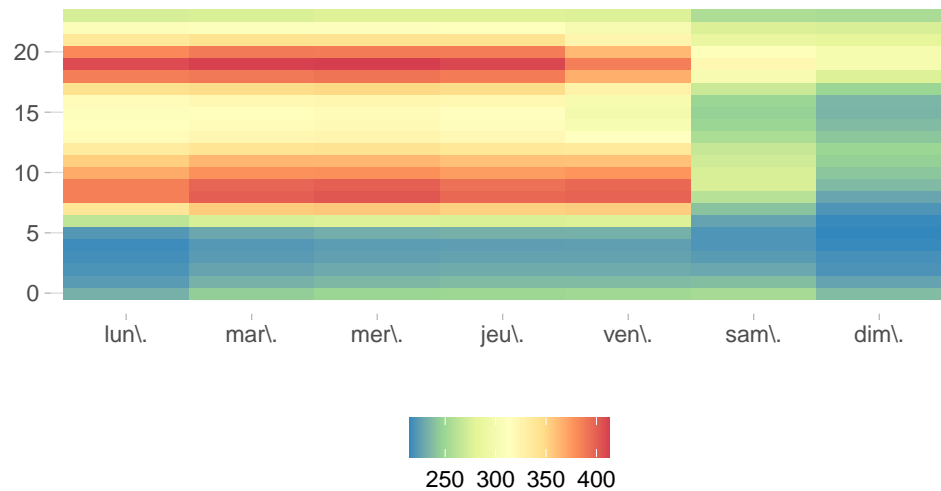

The production pattern differs from the previous one: unlike an increase that would occur progressively, there are clear peaks and drops during the day, with a maximum around 7 p.m. (with a value 18% higher than maximum consumption).



We can also confirm the absence of night-time production, with overall values more than 20% lower.

4.1.3 STL Decomposition and Residuals

Now that we have a better understanding of our data, we can go further and try to find the exact origin of these patterns. We will first analyze the STL decomposition on total sales, and then differentiate it for each department. As said before, we want to find out which specific event can be applied to each department : they are probably not all significant and may differ from one department to another. You can see here the component of the STL on total sales (you can find the other in the appendix) We find from the yearly seasonality :

We can now build the STL decomposition with additive parameter due to no change over time in the seasonality :



We reduce the scope to four years to have a better view of the data, we have shown that seasonality was constant over the year.

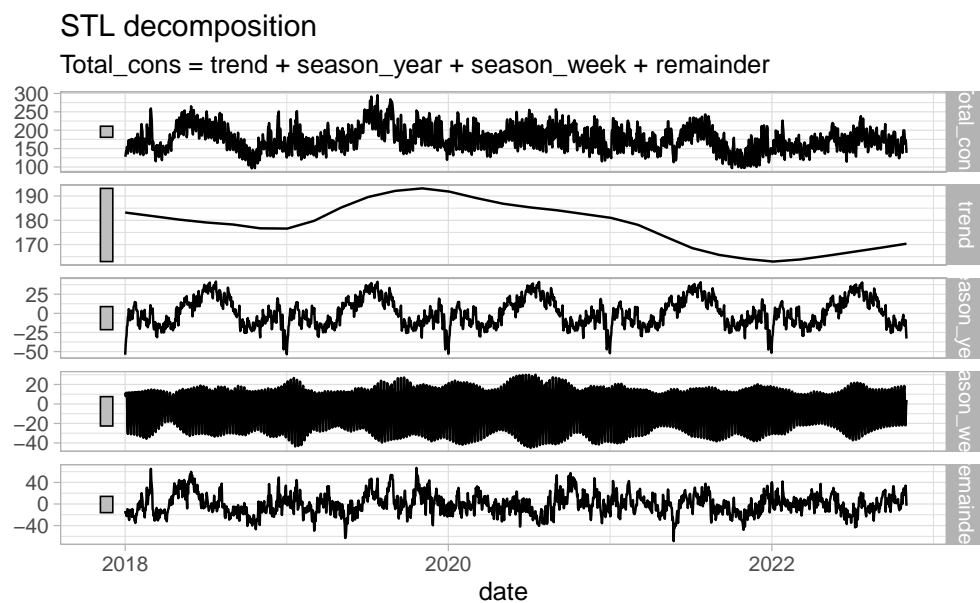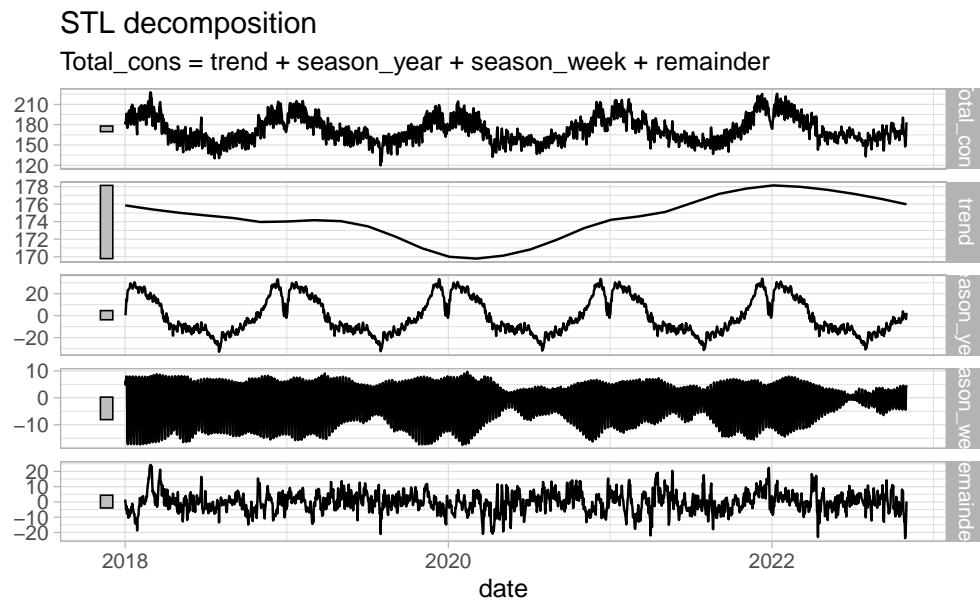



Same for production

Residuals

Let's have a look at the residuals :

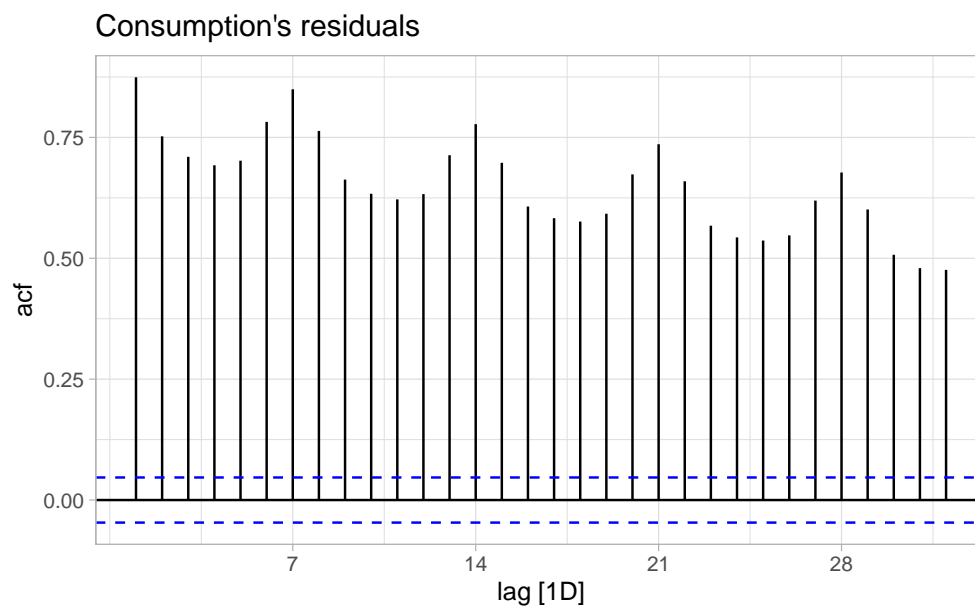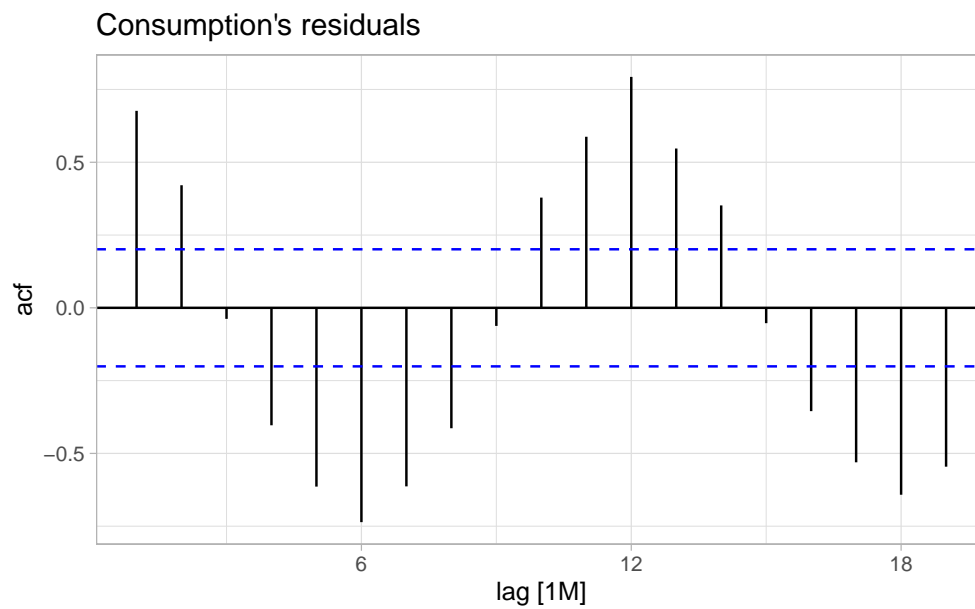

for cons

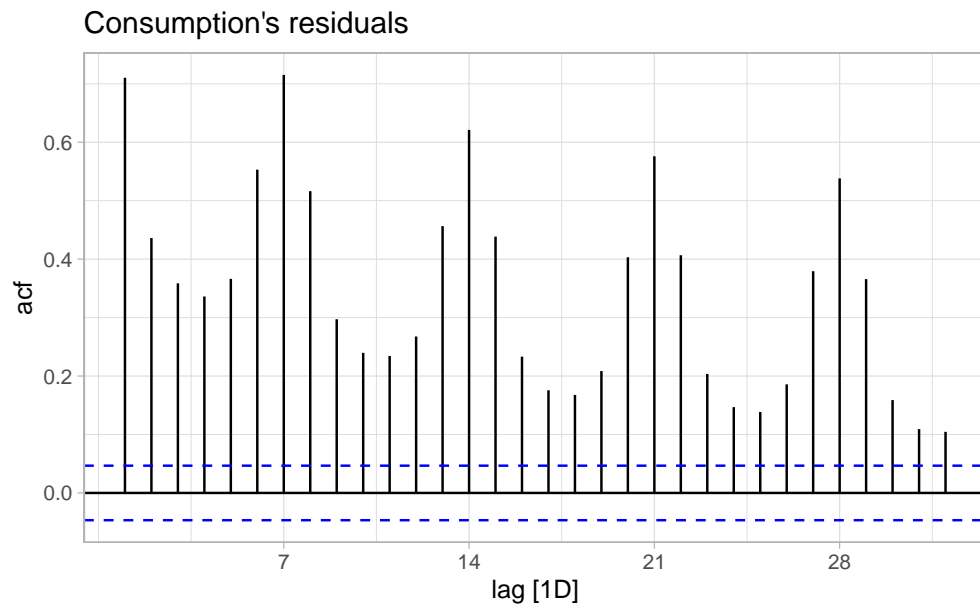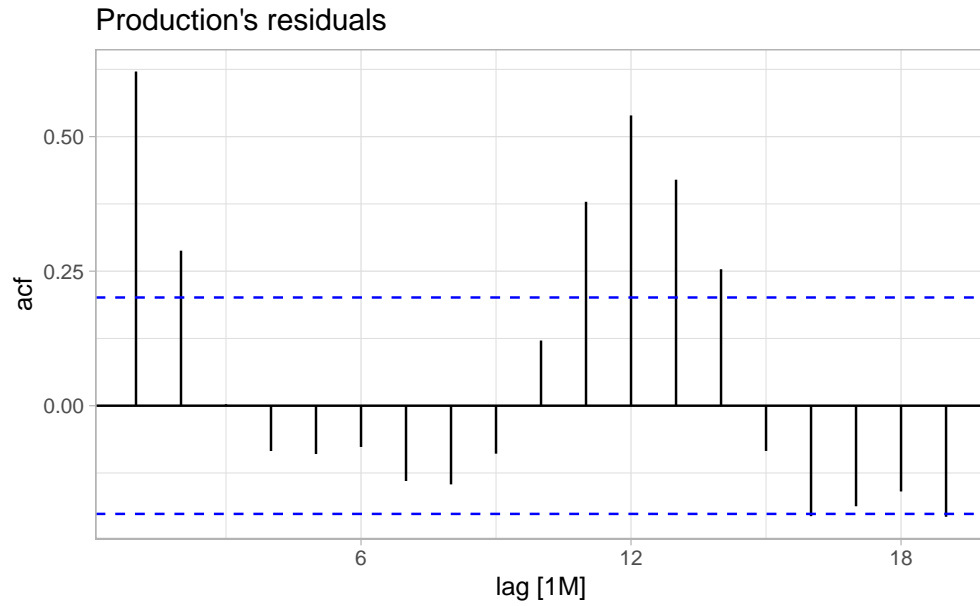


for prod

4.1.4 Main insight from the overall Data


- Results from consumption
- Results from production

4.2 Second and Tertiary control

4.2.1 Positive and Negative Secondary control with trend

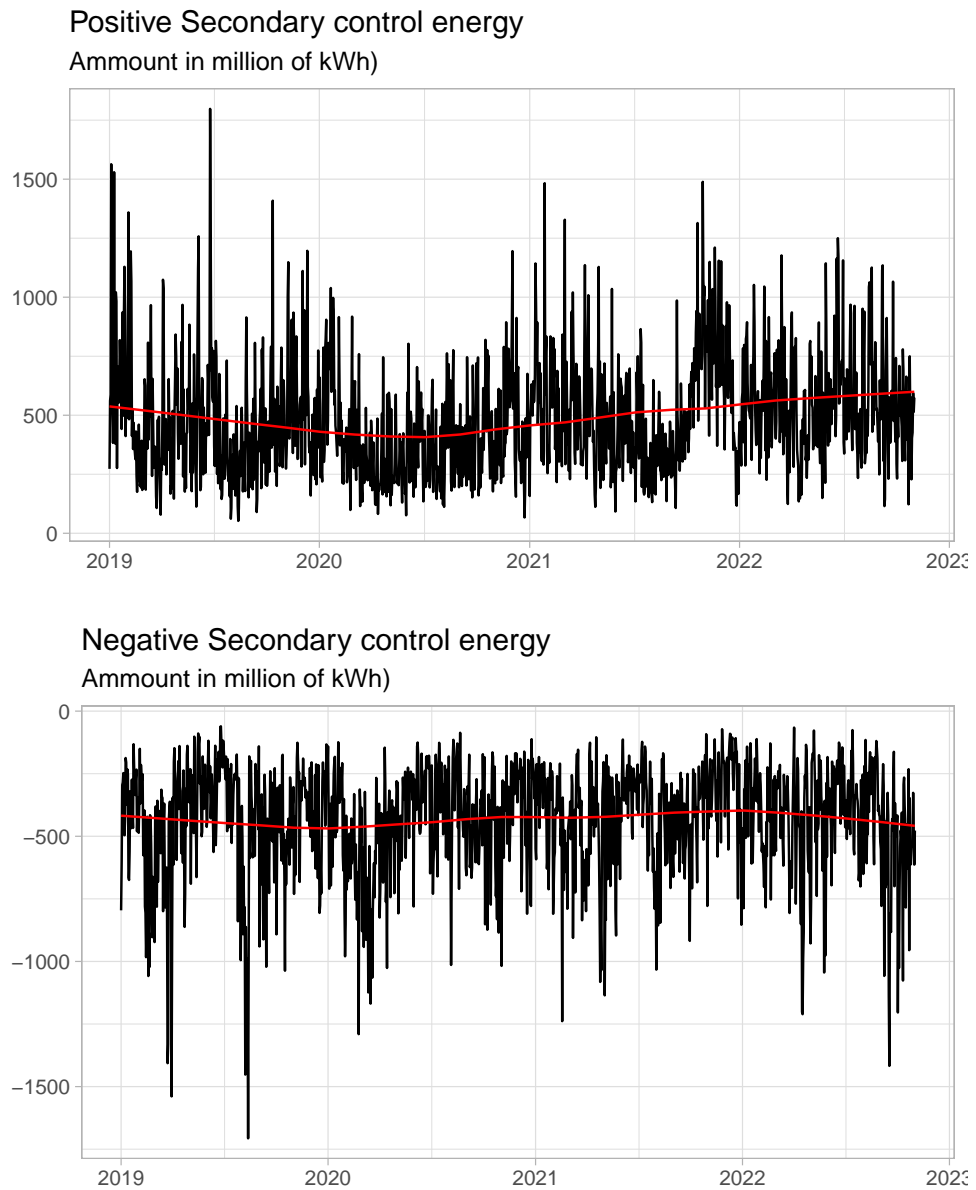

4.2.2 Positive and Negative Tertiary control with trend

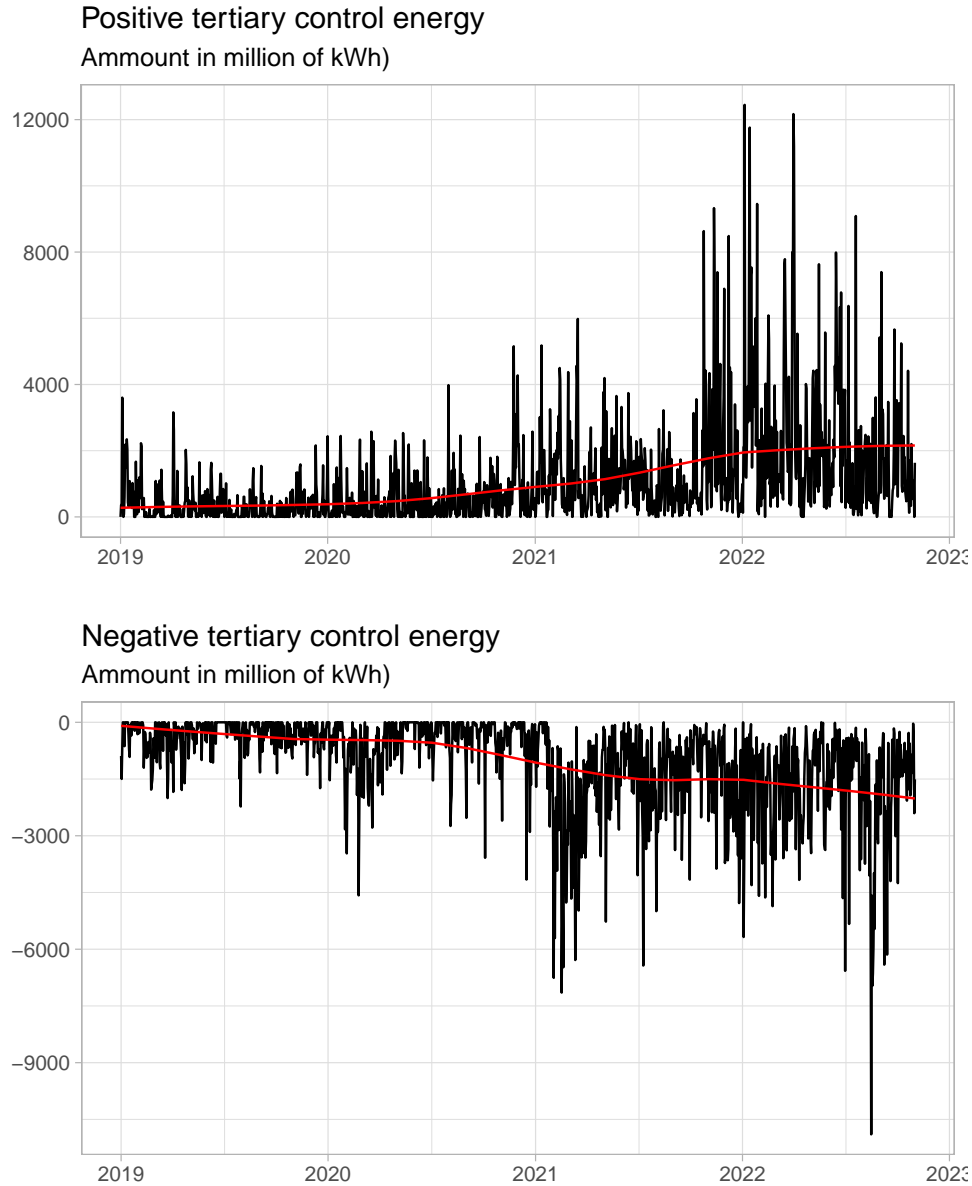

4.3 Border

4.4 Foreign

4.5 Canton

Let's do the same for Cantons : -> Where is the electricity consumed and where does it come from ? -> what drives it ? density, mapping, policy, mapp of barrage/hydrolyique central, plant and so on

What data do we have :

All the different cantons were set as variable (horizontal), in order to perform the analysis we needed to transform our Data-set in a vertical shape.

Here is what the final version look like (we only show 1 variable for the Time)

time	hourly	month	date	Cantons	production	consumption
2015-01-01 00:15:00	2015-01-01	janv	2015-01-01	argovie	511742	151008
2015-01-01 00:15:00	2015-01-01	janv	2015-01-01	fribourg	6657	82368
2015-01-01 00:15:00	2015-01-01	janv	2015-01-01	glaris	56449	12761
2015-01-01 00:15:00	2015-01-01	janv	2015-01-01	grisons	196507	89631
2015-01-01 00:15:00	2015-01-01	janv	2015-01-01	lucerne	4576	104484


With a total of missing value of :

```
sum(is.na(canton_df_long))
#> [1] 0
```

-> We have, for each 15-minute period, the consumption and production of each Cantons. As said in introduction, some Cantons have been grouped together. You can see the breakdown here:


```
#> [1] "argovie"      "fribourg"     "glaris"       "grisons"
#> [5] "lucerne"     "neuchatel"    "soleure"      "saint_gall"
#> [9] "tessin"     "thurgovie"    "valais"       "appenzell"
#> [13] "bale"        "berne_jura"   "schwytz_zoug" "obw_nidw_uri"
#> [17] "geneve_vaud" "schaff_zurich"
```

24 Cantons (do not differentiate half-canton) spread over 18 values. -> For further analysis, we will split the value to get the 24 cantons. Method and results will be presented in an other section.

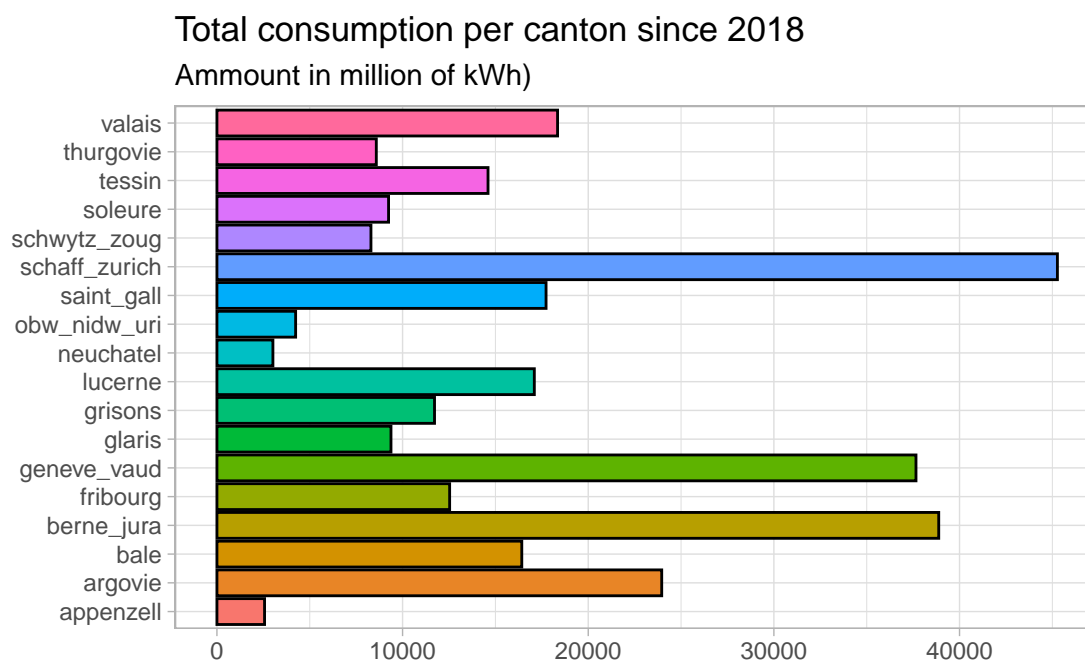

Total production per canton since 2018

Amount in million of kWh)

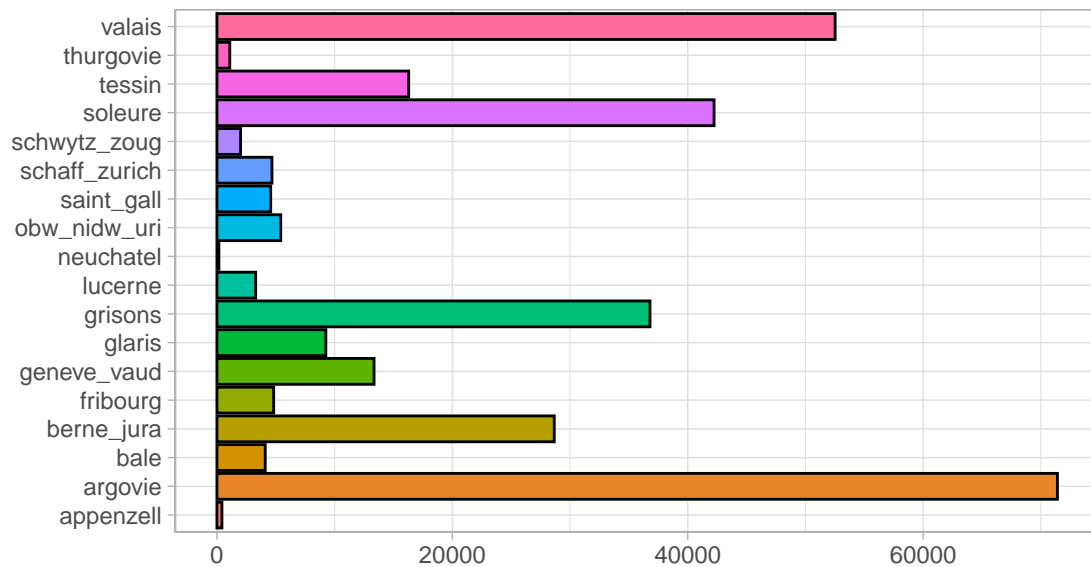


Many difference here : Higher standard deviation for production Consumption and Production seems independent -> not driven by the same variable


Let's see the monthly seasonality and trends over time for the top 3 of each category :

Monthly consumption per canton since 2018

Amount in million of kWh)

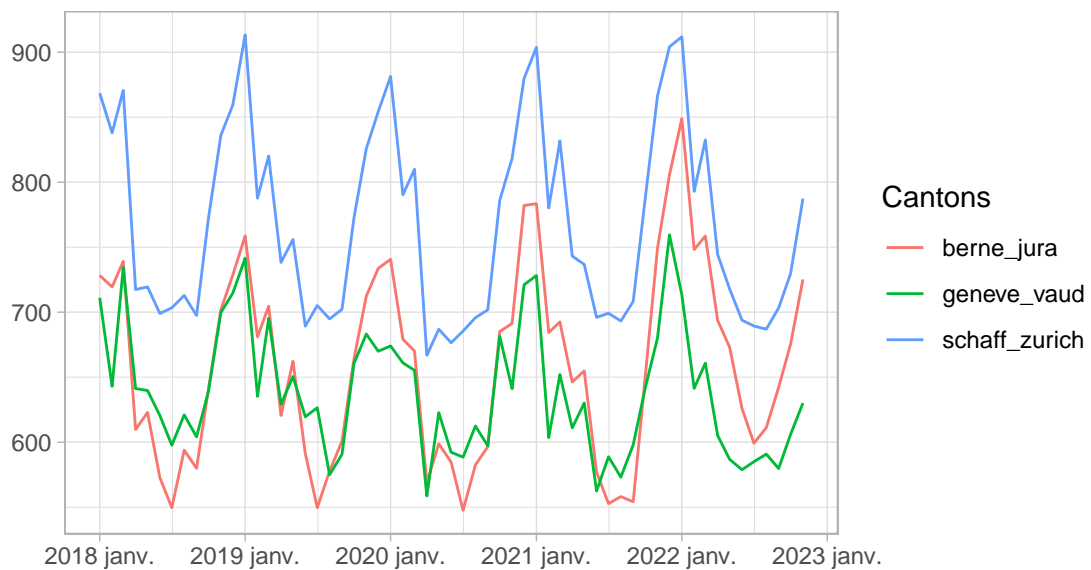


Monthly production per canton since 2018
 Ammount in million of kWh)

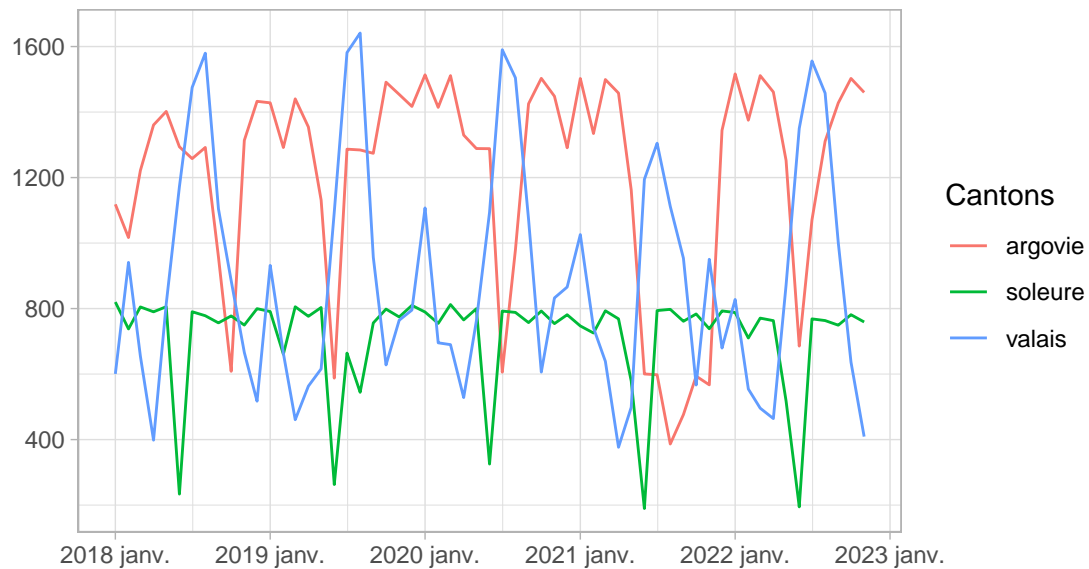

STL decomp for top 3 prod and top 3 cons


STL decomposition

consumption = trend + season_year + reminder (in million of kWh)

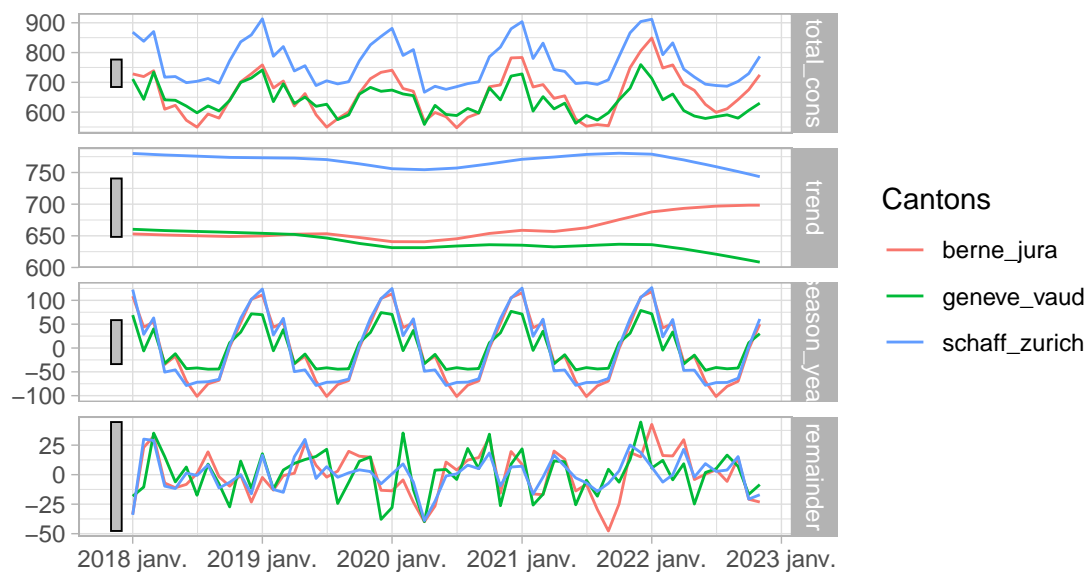

STL decomposition


production = trend + season_year + reminder (in million of kWh)

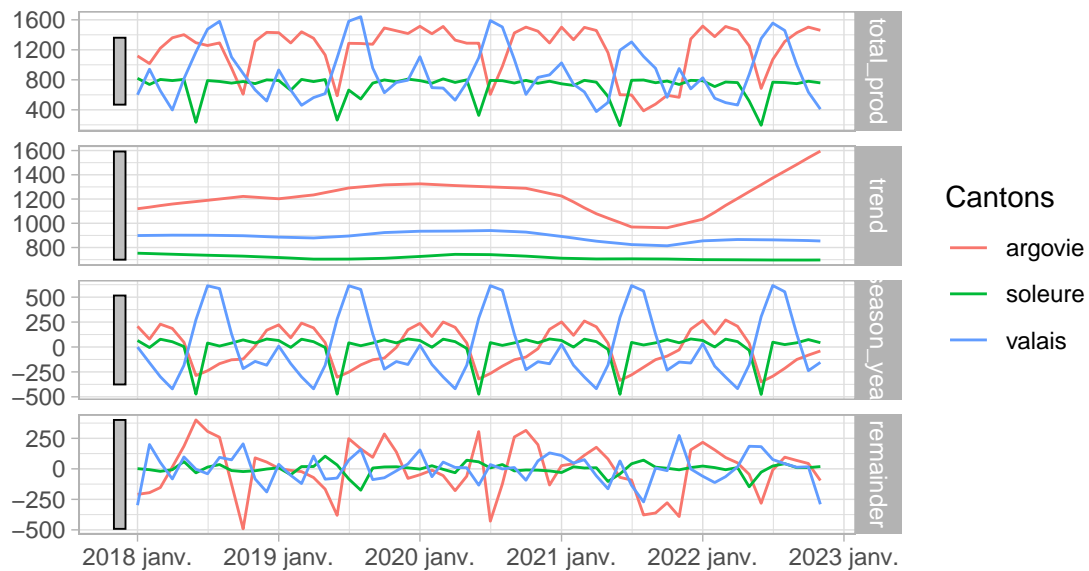

Facet wrap per Cantons with and without free scale :

Monthly consumption per canton since 2018

Amount in million of kWh with free scale

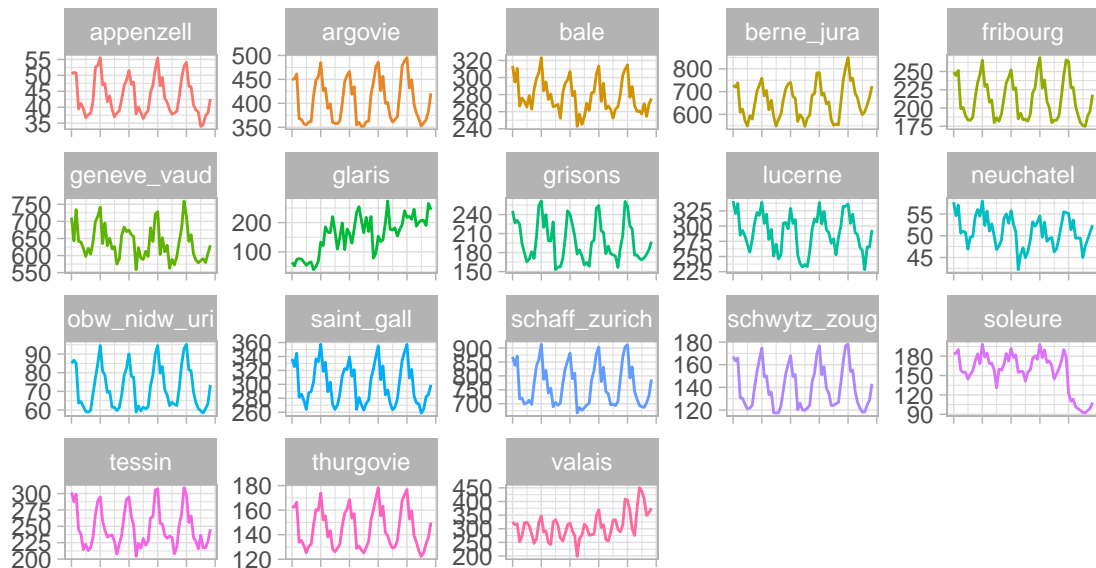


Monthly consumption per canton since 2018




Monthly production per canton since 2018

Amount in million of kWh with free scale

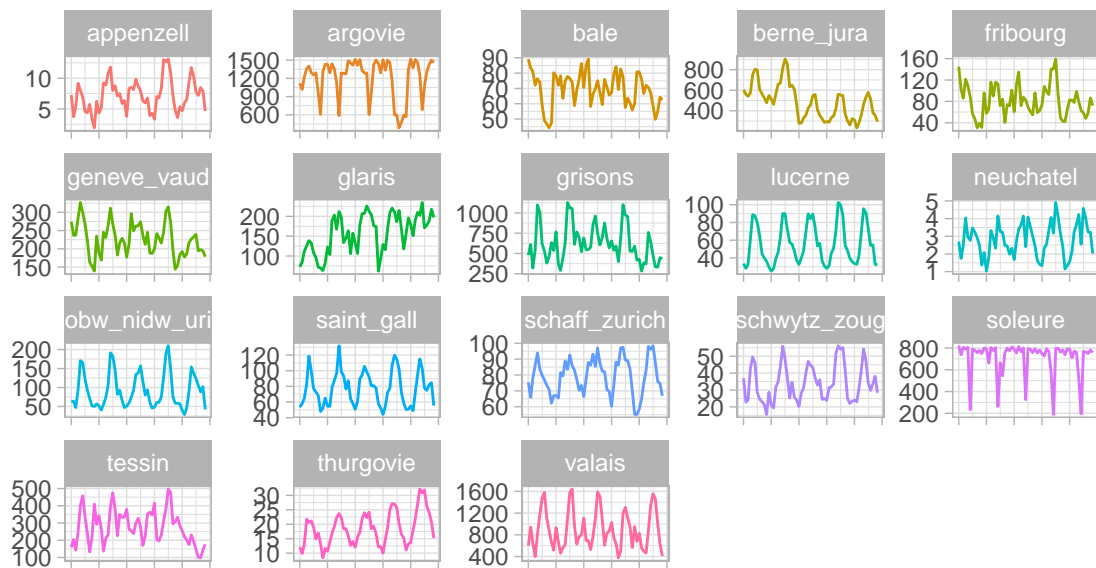


Monthly production per canton since 2018

Amount in million of kWh

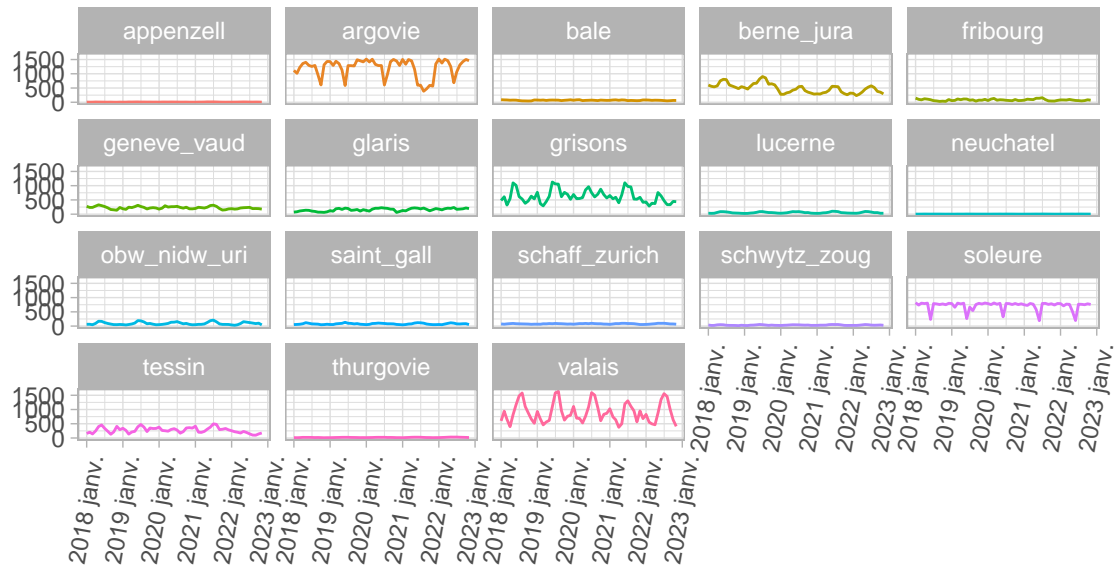


Features analysis to check the strength of the seasonality/trend


Features analysis for consumption

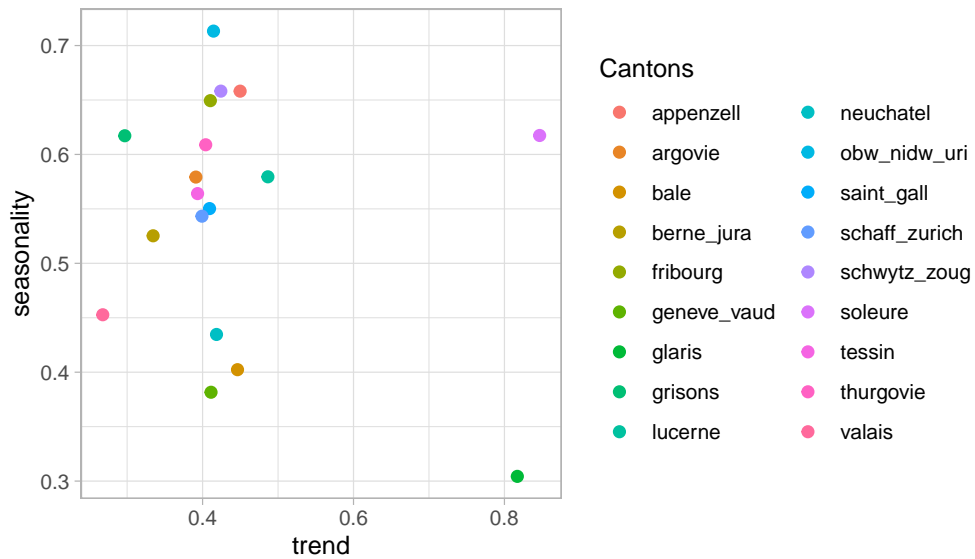

test

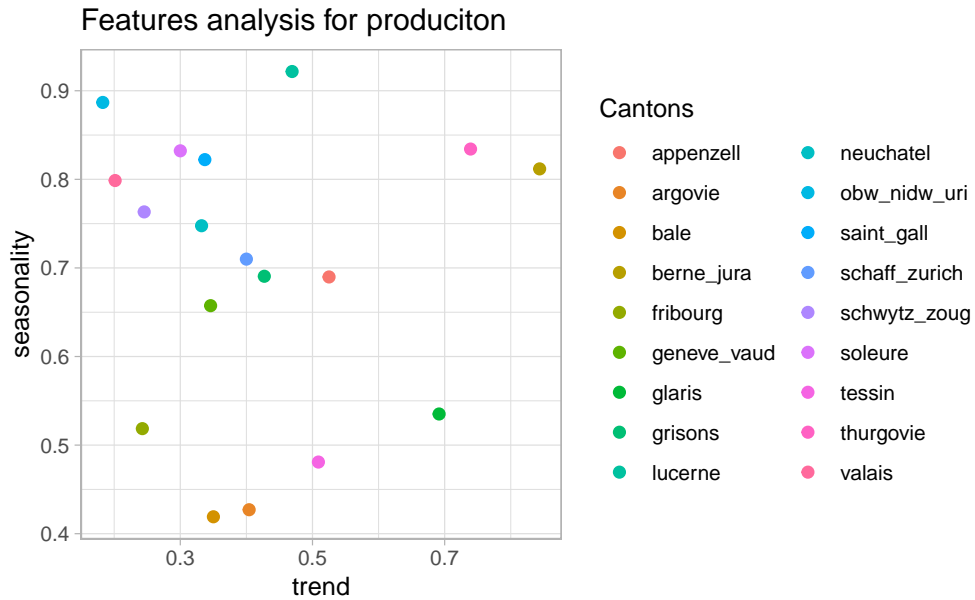

4.6 Mapping

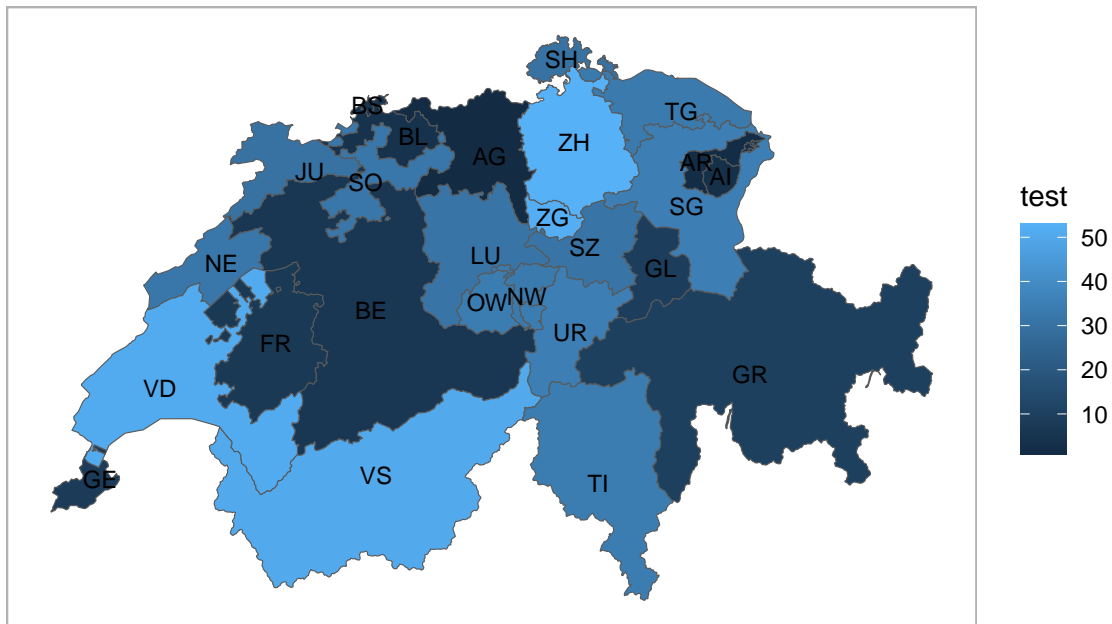

5 Forecasting

6 Conclusion and possible extension

- Would have been nice to assess the price evolution/prediction.

7 References and Appendix

- <https://arxiv.org/pdf/1901.10257.pdf>
- <https://www.swissgrid.ch/fr/home.html>
- <https://gadm.org/>
- <https://www.admin.ch/gov/fr/accueil/documentation/communiques.msg-id-90221.html>
- <https://www.eda.admin.ch/aboutswitzerland/fr/home/wirtschaft/energie/energie---fakten-und-zahlen.html>
- <https://www.rts.ch/info/economie/13304056-penurie-delectricite-cet-hiver-les-enjeux-en-cinq-questions.html>
- <https://www.economiesuisse.ch/fr/articles/energieticker-f>