DUET-AFE | actual SKY130 / ngspice schematic results

A. Selected candidate: AC transfer

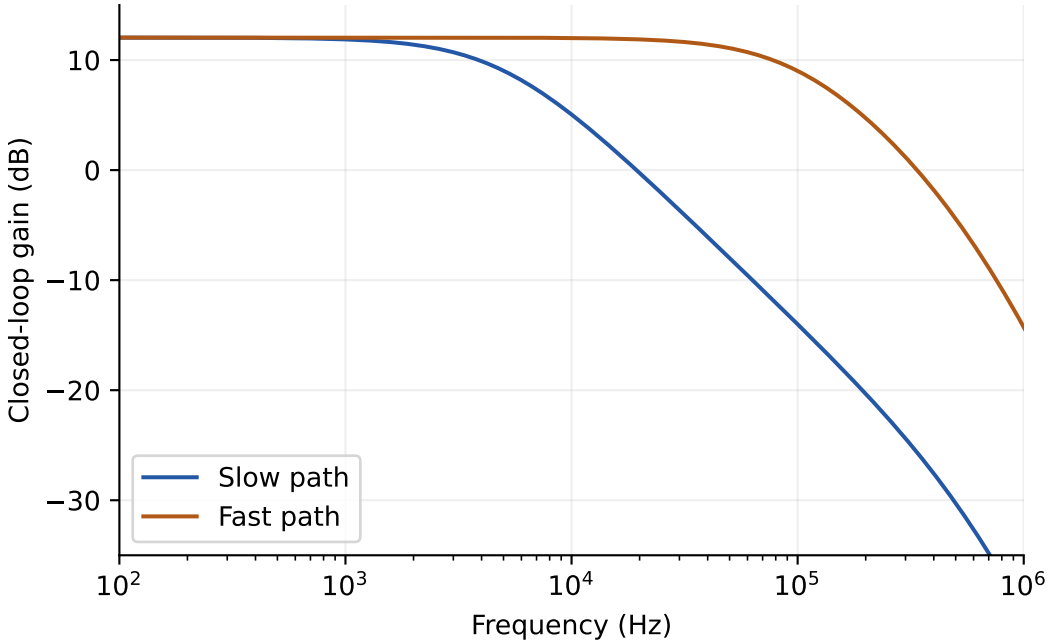

B. Actual 5kHz + 50kHz response

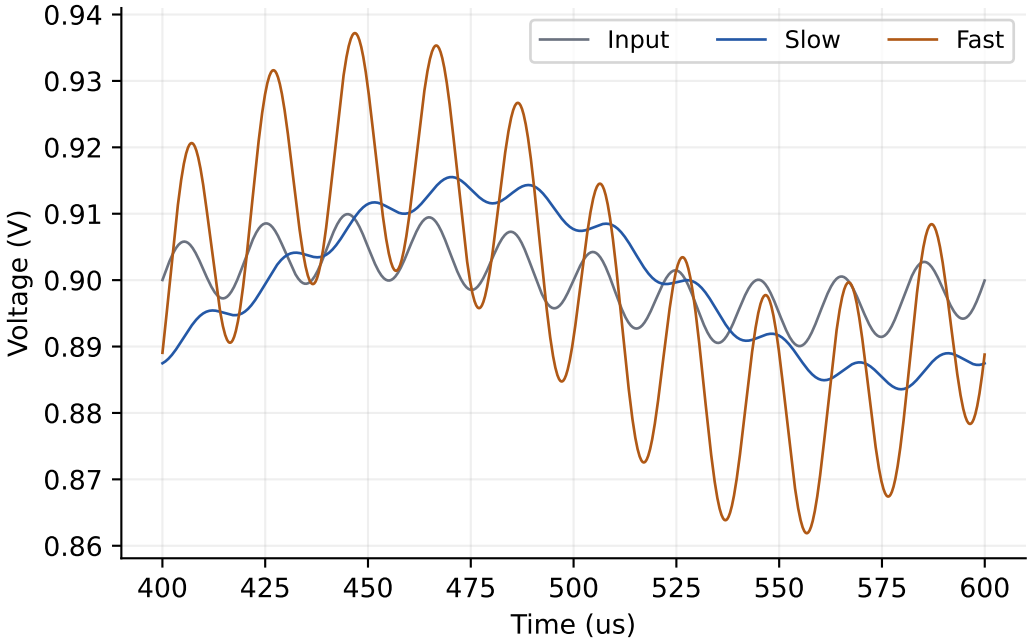

C. Three sampled MOS PVT conditions

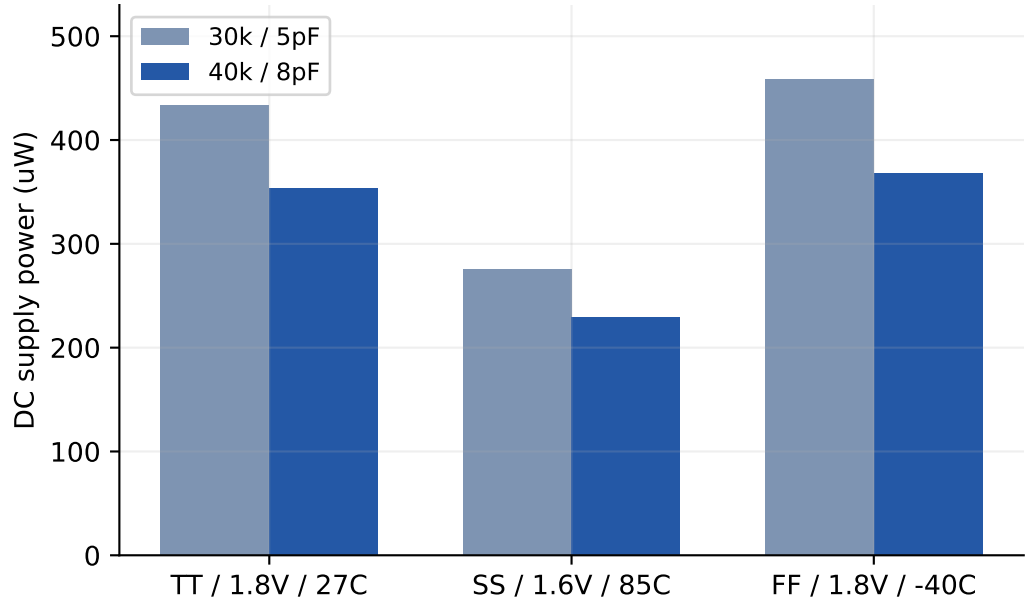

D. Nominal comparison (1.8V, TT, 27C)

Measurement	30k / 5pF	40k / 8pF
Gain (V/V)	4.0052	4.0032
Slow -3dB (kHz)	4.997	4.997
Fast -3dB (kHz)	99.763	99.458
DC power (uW)	433.46	353.13

DC power reduction: 18.53%
Measured after AI parameter selection; not a guaranteed optimum.

Ideal R/C and external stimulus/load; no extracted layout, noise, mismatch or foundry signoff.