

IMPERIAL COLLEGE LONDON

DEPARTMENT OF ELECTRICAL AND ELECTRONIC ENGINEERING
EXAMINATIONS 2005

MSc and EEE PART IV: MEng and ACGI

Corrected Copy

TRAFFIC THEORY & QUEUEING SYSTEMS

Thursday, 28 April 10:00 am

Time allowed: 3:00 hours

There are FIVE questions on this paper.

Answer FOUR questions.


All questions carry equal marks

Any special instructions for invigilators and information for candidates are on page 1.

Examiners responsible	First Marker(s) :	J.A. Barria
	Second Marker(s) :	P. De Wilde

Especially Information for Invigilators: NIL

Information for Candidates:

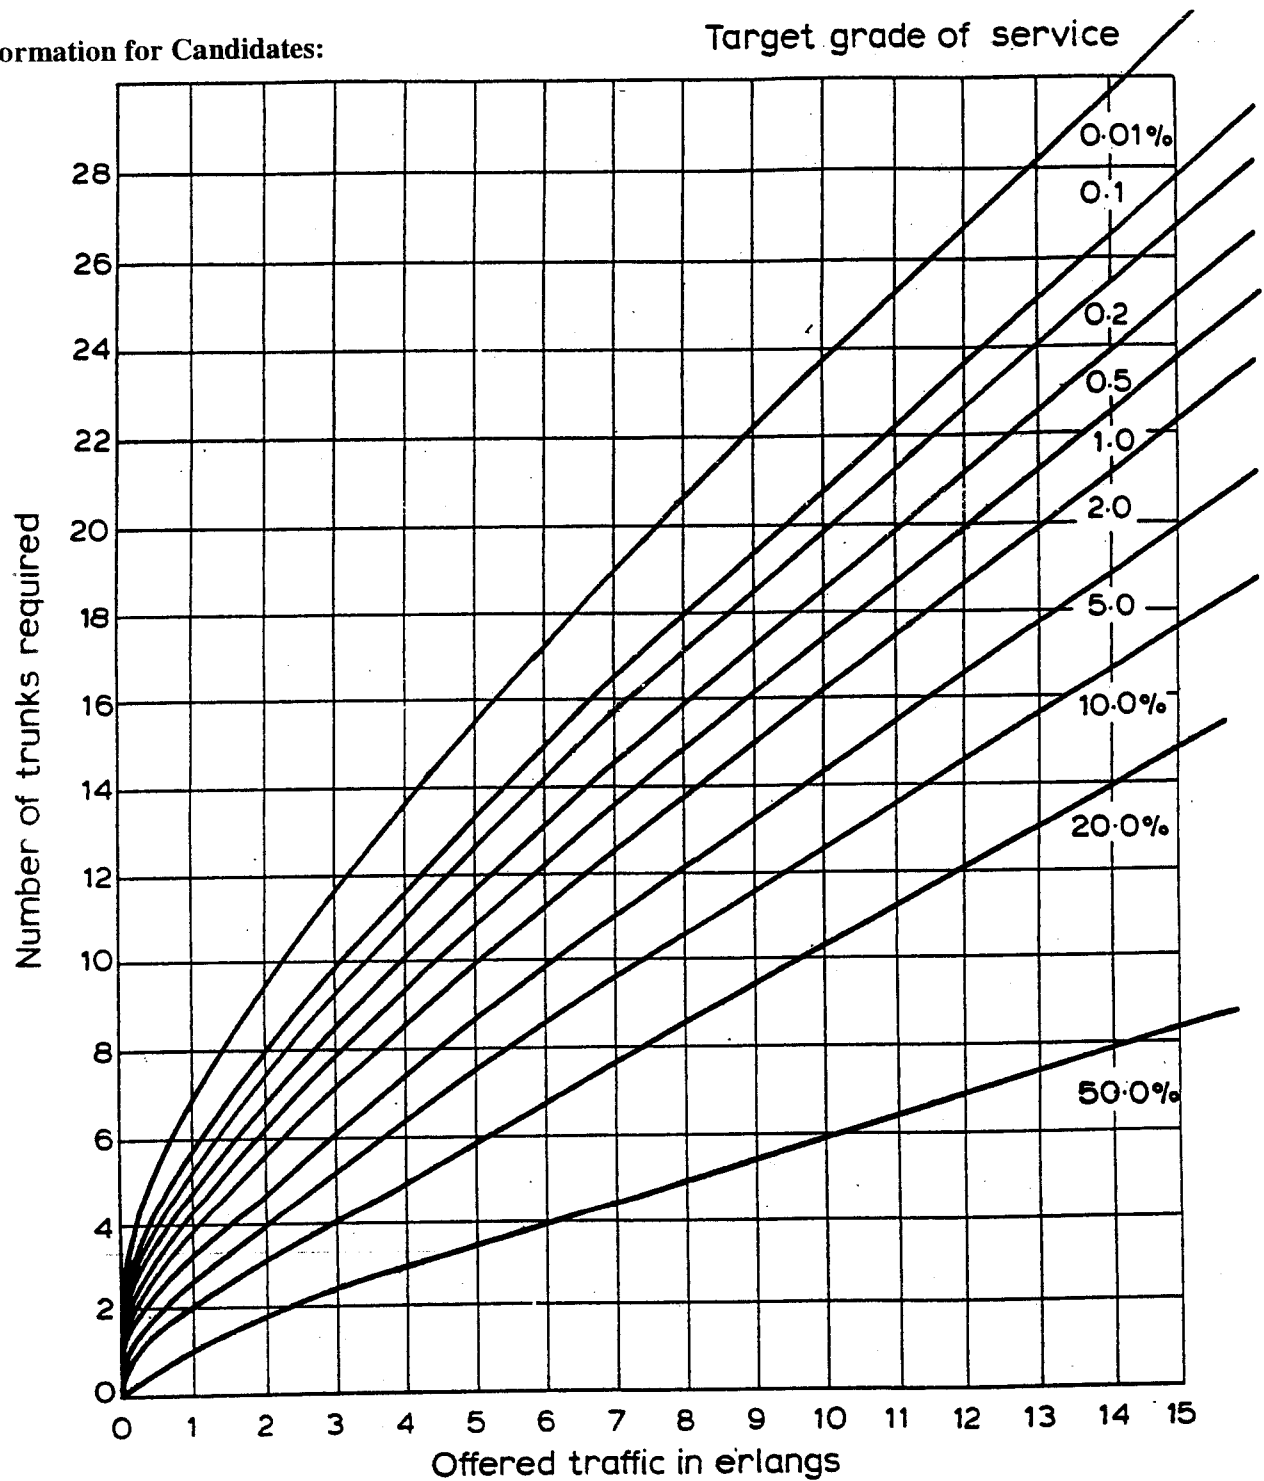

*Traffic capacity on basis of Erlang B.
formula.*

a)

- i) Describe and discuss underlying assumptions made when formulating the Erlang model.
- ii) For the case of finite capacity system derive the probability of link saturation.

[10]

b) An N-channel link system is being offered ρ Erlangs of pure chance traffic.

- i) Show that if the search for a free channel is always sequential (i.e. 1, 2, 3, ..., N) the mean occupancy of channel number j is given by

$$\eta_j = \rho[E_{j-1}(\rho) - E_j(\rho)]$$

- ii) Derive the average value of the channel occupancy in part (b) i). Discuss your results.

[10]

- a)
- Describe and discuss the usefulness of an Interrupted Poisson Process to describe an overflow link state.
 - Define and discuss an overflow link traffic model using the on-off source model of Figure 2.1.
 - Explain the meaning of α , β and λ .
 - Derive the expressions of the global balance equations of an overflow link composed of one (1) channel.

[10]

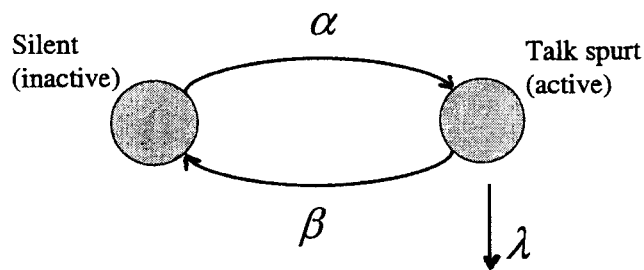


Figure 2.1.

- b)
- A communications link with 8 channels is grouped so that half the incoming traffic have access to the first 4 channels and the other half have access to the other 4 channels. If the total offered traffic is 8 Erlangs of pure chance traffic
- Determine the call congestion of the system.
 - Determine the link occupancy distribution.

[10]

3.

a) Using mean-value analysis

- i) Explain the meaning of and derive the expected residual time of an M/G/1 system.
- ii) Derive the expression for the expected waiting time of an M/G/1 system.

State clearly all assumptions made.
Explain clearly all steps of your derivations.

[10]

b)

- i) For a k-class priority queueing system, define and explain non-pre-emptive priority and pre-emptive priority mechanisms.
- ii) Explain and derive an expression for the expected transit time in a pre-emptive priority system.
- iii) Describe and discuss a priority mechanism that would reduce the system expected waiting time ($E(W)$).

[10]

4.

a)

- i) Explain the importance of access control in ATM networks.
- ii) The user parameter control technique proposed by the ATM forum has a number of equivalent representations. Explain the operation of one of such equivalent algorithms.
- iii) Derive a simple approximation model of an access control algorithm known to you.

[10]

- b) In an operation support system contact centre all incoming calls are handled on a delay basis by a group of 10 operators. Assume that incoming traffic is pure chance with a level of 8 Erlangs.

- i) Determine the mean delay experienced by calls which are accepted but delayed for buffer capacity $B = 5$.
- ii) Determine the mean delay experienced by calls which are accepted but delayed for buffer capacity $B = 10$.

[10]

5.

a)

- i) Describe a multimedia traffic source model. Clearly define and describe all parameters of the model.
- ii) Derive and depict a Markov model representation of a N on-off source multiplexor.
- iii) Assuming that the service rate is ν and the arrival rate of cells is β cells/s. Derive the maximum number of multiplexed sources that the system can cope with.

[10]

b) For the fault tolerant system represented in Figure 5.1.

Assume that the repair time and time to failure are exponentially distributed and:

R_p ; is the failure rate of each processor (assume it to be independent of the failure rate of the state of the other processors)

R_b ; is the failure rate of the data base (assume that any failure in the data base results in the loss of the entire system) and

j/R_r ; is the time to repair j faulty components

- i) Obtain the Markov chain representing the fault tolerant system of Figure 5.1.

State clearly and discuss any assumptions made in your derivations.

[10]

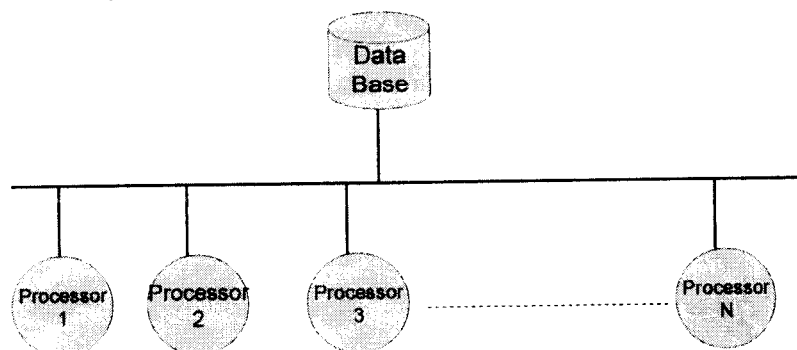


Figure 5.1:

MODEL ANSWER and MARKING SCHEME

First Examiner

Paper Code

E 405 / 507

Second Examiner

Question

Page 1 out of 11

Question labels in left margin

Marks allocations in right margin

(a) Erlang Model Assumptions

i) The total arrival stream is a Poisson process with rate λ

ii) The channel holding times are independent exponential RV with mean holding time of $1/\mu$

iii) The access switch gives full availability i.e. each traffic source has access to all the channels on the link

5

For $N \leq \infty$

$$\pi_0 = \frac{\rho^0}{\sum_{i=0}^{\infty} \frac{\rho^i}{i!}} \quad (\rho = \lambda/\mu)$$

$$\pi_i = \left[\frac{\frac{\rho^i}{i!}}{\sum_{j=0}^{\infty} \frac{\rho^j}{j!}} \right] \quad i = 0, 1, \dots, \infty$$

$$P[\text{link saturation}] = P[N_t = \infty]$$

$$= \pi_{\infty}$$

$$= \frac{(\rho^{\infty}/\infty!)}{S(N, \rho)} = E_N(\rho)$$

$$S(N, \rho) = \sum_{j=0}^{\infty} \left(\frac{\rho^j}{j!} \right)$$

5

MODEL ANSWER and MARKING SCHEME

First Examiner

Paper Code

Second Examiner

Question

Page 2 out of

Question labels in left margin

Marks allocations in right margin

Ans.

 $C_1 \rightarrow C_{j-1} = \text{link of size } j-1$ available to $\{C_1, \dots, C_{j-1}\} = p E_{j-1}(p)$ available to $\{C_{j+1}, \dots, C_N\} = p E_j(p)$ Therefore limited by, $C_j = p [E_{j-1}(p) - E_j(p)]$

$$\Rightarrow R_j = p [E_{j-1}(p) - E_j(p)]$$

Average of R_j over all channel $C_1 \rightarrow C_N$

$$\bar{R}_j = \frac{1}{N} \sum_{j=1}^N R_j = \frac{p}{N} \sum_{j=1}^N [E_{j-1} - E_j]$$

$$= \frac{p}{N} [E_0 - E_N]$$

$$= \frac{p}{N} [1 - B_0] = \eta$$

5

5

Examinations : ~~1999~~ Session
MODEL ANSWER and MARKING SCHEME

Confidential

First Examiner

Paper Code

Second Examiner

Question

Page 3 out of

Question labels in left margin

Marks allocations in right margin

2a

JPP

i)

In the Karlin model the arrival process of the overflow traffic consists of a Poisson arrival stream which is ON when the first-choice link is saturated and OFF when the first-choice link is not saturated. We can approximate this process to an on/off switching process and can be represented by a 2-state Markov process (Figure 2.1)


2

mean OFF period = $1/\alpha$

mean ON period = $1/\beta$

2

- Poisson stream when system is ON

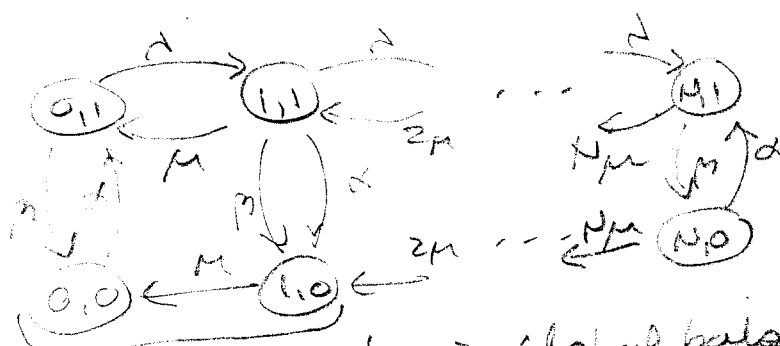

for a N channel overflow link

3

1 channel \Rightarrow global balance equation

$$\alpha \pi_0 = \mu \sigma_0 + \mu \pi_1$$

$$\pi_0 = P(N_t=0, Y_t=0)$$

$$\sigma_0 = P(N_t=0, Y_t=1)$$

$$(\mu + \beta) \sigma_0 = \alpha \pi_0 + \mu \sigma_1$$

$$(\alpha + \mu) \pi_1 = \beta \sigma_1$$

$$\mu \sigma_1 = \alpha \pi_1 + \beta \sigma_0$$

3

Paper Code

Question

Page 4 out of

Marks allocations in right margin

25

100

$$= P[\text{circuit is on } A] P[\text{all } A \text{ channels busy}]$$

+ P [answer is one] P [all 3 chemd. busy]

$$= \frac{1}{2} t_9(4) + \frac{1}{2} t_4(4) = 0.311$$

with occupancy distribution

$$TIC = P [\text{Total no. of busy channels} = i]$$

$$P_i = P[\text{Nr of busy channels} = i]$$

$$= 1^2 [\text{Nr of busy B channels} = 6]$$

$$\pi_c = 3.04$$

$$\pi_1' = 2\pi c\pi_1$$

$$\pi_0 = \pi_0^2 + 2\pi_0 u_2$$

$$\pi_3' = 2(\pi_0 \pi_3 + \pi_1 \pi_2)$$

$$\pi_d = (\pi_2)^2 + 2(\pi_0\pi_1 + \pi_1\pi_3)$$

$$T_1 = 2(T_1 T_2 + T_2 T_3)$$

$$\pi_6 = (\pi_3)^2 + 2\pi_2\pi_4$$

14-27374

- 14 -

5

5

MODEL ANSWER and MARKING SCHEME

First Examiner

Paper Code

Second Examiner

Question


Page 5 out of

Question labels in left margin

Marks allocations in right margin


3a

R_t = residual service time = time until the first departure seen by i^{th} arrival

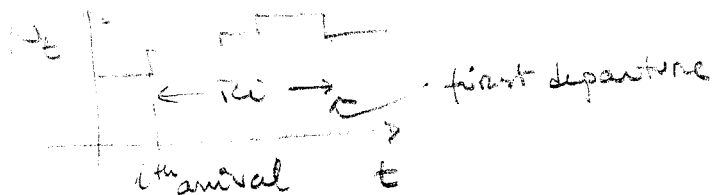

R_t = residual service time seen by a virtual arrival at time t

then at equilibrium $\{R_t\}$ is a continuous time stochastic process which looks like

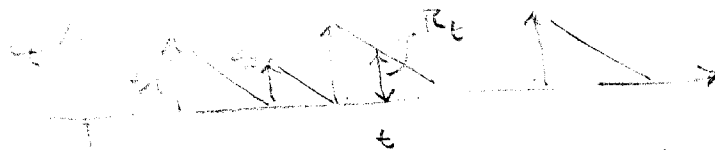

assuming that $\{R_t\}$ is Ergodic (in mean).

$$E(R_t) = \lim_{T \rightarrow \infty} \frac{1}{T} \int_0^T R_t dt$$

$$= \lim_{T \rightarrow \infty} \frac{1}{T} \sum_{i=1}^{M_T} \left(\frac{1}{2} s_i^2 \right)$$

M_T = no. of completed services in $[0, T]$

$$E(R_t) = \lim_{T \rightarrow \infty} \underbrace{\frac{1}{2}}_{\lambda} \underbrace{\left(\frac{M_T}{T} \right) \left[\frac{1}{M_T} \sum_{i=1}^{M_T} s_i^2 \right]}_{E(s^2)}$$

$$E(R_t) = \frac{1}{2} \lambda E(s^2)$$

5

MODEL ANSWER and MARKING SCHEME

First Examiner

Paper Code

Second Examiner

Question

Page 6 out of

Question labels in left margin

Marks allocations in right margin

By
in

S_i = service time
 w_i = waiting time
 Q_i = queue length found on arrival

} i th
arrival

$$w_i = \left[R_i + \sum_{j=1}^{Q_i} S_{i-j} \right]$$

$$E(w_i) = E(R_i) + E \left[\sum_{j=1}^{Q_i} S_{i-j} \right]$$

$$= E(R_i) + E \left[E \left(\sum_{j=1}^{Q_i} S_{i-j} \mid Q_i \right) \right]$$

$$= E(R_i) + E \left[Q_i E(S) \right]$$

sum of
 Q_i iid R_i

$$= E(R_i) + E(Q_i) E(S)$$

Since Poisson arrivals see unbiased sample of queue behaviour

$$E(w) = E(R) + E(Q) E(S)$$

by Little's

$$E(Q) = \lambda E(w)$$

$$E(w) = \frac{E(R)}{1-\rho}$$

5

Examinations : ~~XXXX~~ Session
MODEL ANSWER and MARKING SCHEME

Confidential

First Examiner

Paper Code

Second Examiner

Question

Page 7 out of

Question labels in left margin

Marks allocations in right margin

30

a) Non-pre-emptive priority : service of item may not be interrupted by a higher-priority arrival

b) Pre-emptive priority : service is interrupted by any higher-priority arrival.

• in this case there are 2 possibilities :

Pre-emptive resume

Pre-emptive re-start

3

$$T_K = W_K + \hat{S}_K$$

$$E(W_K) = \frac{E(R_K)}{(1-\sigma_{K-1})(1-\sigma_K)}$$

$$E(V_K) = \sum_{i=1}^{K-1} \lambda_i E(\hat{S}_K) E S_i$$

$$= \sigma_{K-1} E(\hat{S}_K)$$

$$E(\hat{S}_K) = E(S_K) + E(V_K)$$

$$= \frac{E(S_K)}{1-\sigma_{K-1}}$$

$$E(T_K) = E(W_K) + E(\hat{S}_K)$$

4

m) In a non-pre-emptive priority give priority to item with shorter expected service times. For example a queue discipline like shortest job first.

3

MODEL ANSWER and MARKING SCHEME

First Examiner

Paper Code

Second Examiner

Question

Page 2 out of

Question labels in left margin


Marks allocations in right margin

4.0

Assume a call has been admitted and the connection established, it is necessary to monitor and control the traffic actually generated by the call to ensure it conforms to the traffic description originally specified.

This procedure is referred to as user parameter control, user control, credit management or traffic policing.

The usage parameter control technique proposed by the ATM forum, called the Generic Rate Descriptor has a number of equivalent implementations one of which is the leaky bucket technique. An interpretation of this algorithm involves the use of a "token" pool buffer. A cell must have a token waiting to be transmitted. Tokens are generated once per D sec, and wait in buffer until buffer full. At this time no further token is generated. Average throughput λ^* differs from the load λ because of possible cell loss.

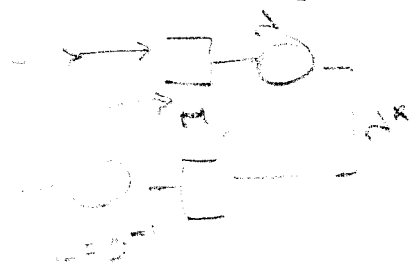

$$\lambda^* = \lambda(1 - P_L)$$

$$P_L = \frac{\rho^M(1-\rho)}{1-\rho^{M+1}}$$

(M tokens in the system)

5

5

Examinations : ~~XXXX~~ Session
MODEL ANSWER and MARKING SCHEME

Confidential

First Examiner

Paper Code

Second Examiner

Question

Page 9 out of

Question labels in left margin

Marks allocations in right margin

4(b) $\lambda = \frac{\lambda}{Kp} = 0.8 \text{ enlarges/channel } (K=10)$

$$P[\text{loss}] = \left[\frac{(1-p)p^B E_K(Kp)}{(1-p) + p(1-p^B)E_K(Kp)} \right]$$

$$E_K(Kp) = 0.122$$

$$P[\text{loss}] = 0.030 \quad B=5$$

$$= 0.009 \quad B=10$$

$$P[Q_t = i] = \left(\frac{1-p}{1-p^B} \right) p^i \quad i = 0, 1, \dots, B-1$$

$$E(Q_t | w > 0) = \begin{matrix} 1.56 & B=5 \\ 2.80 & B=10 \end{matrix}$$

using little

$$\lambda E = \lambda [1 - P[\text{loss}]]$$

$$= 0.1035 \text{ sec}^{-1} \quad B=5$$

$$= 0.1057 \text{ sec}^{-1} \quad B=10$$

$$E(w | \text{Delay}) = \frac{E(Q_t | \text{Delay})}{\lambda E}$$

$$= 15 \text{ sec} \quad B=5$$

$$= 26.5 \text{ sec} \quad B=10$$

5

5

Examinations : ~~1999~~ Session
MODEL ANSWER and MARKING SCHEME

Confidential

First Examiner

Paper Code

Second Examiner

Question


Page / 0 out of

Question labels in left margin



Marks allocations in right margin

3a

1 ON-OFF SOURCE

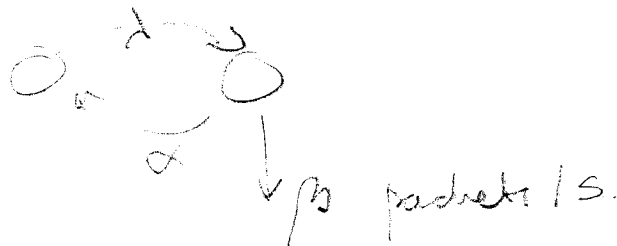

Discussion

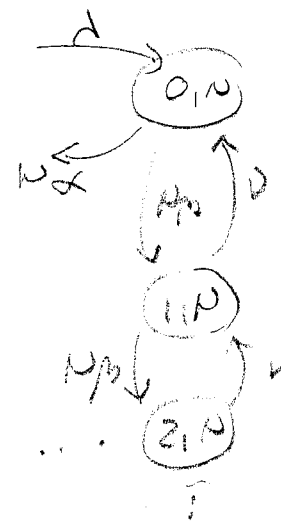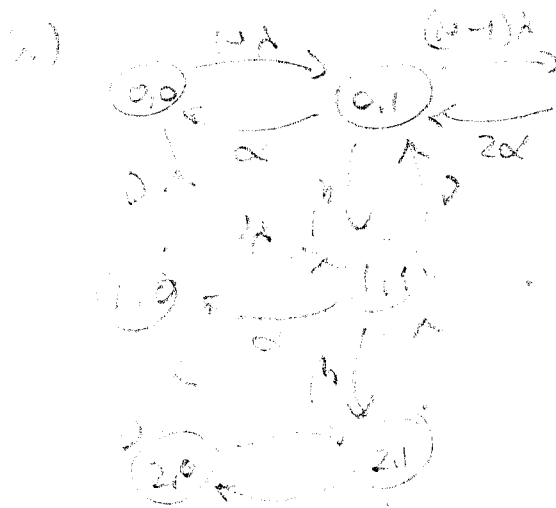

iii) Average cells/s per source = $p \frac{\lambda}{\alpha + \lambda}$

Average cells/s N multiplexed sources = $\frac{N p \lambda}{\alpha + \lambda}$

Capacity of system $D \Rightarrow$

$$N p \frac{\lambda}{\alpha + \lambda} \leq D$$

$$N \leq \frac{D(\alpha + \lambda)}{p \lambda}$$

3

3

4

Examinations : ~~1999~~ Session
MODEL ANSWER and MARKING SCHEME

Confidential

First Examiner

Paper Code

Second Examiner


Question

Page 11 out of 11

Question labels in left margin

Marks allocations in right margin

5b

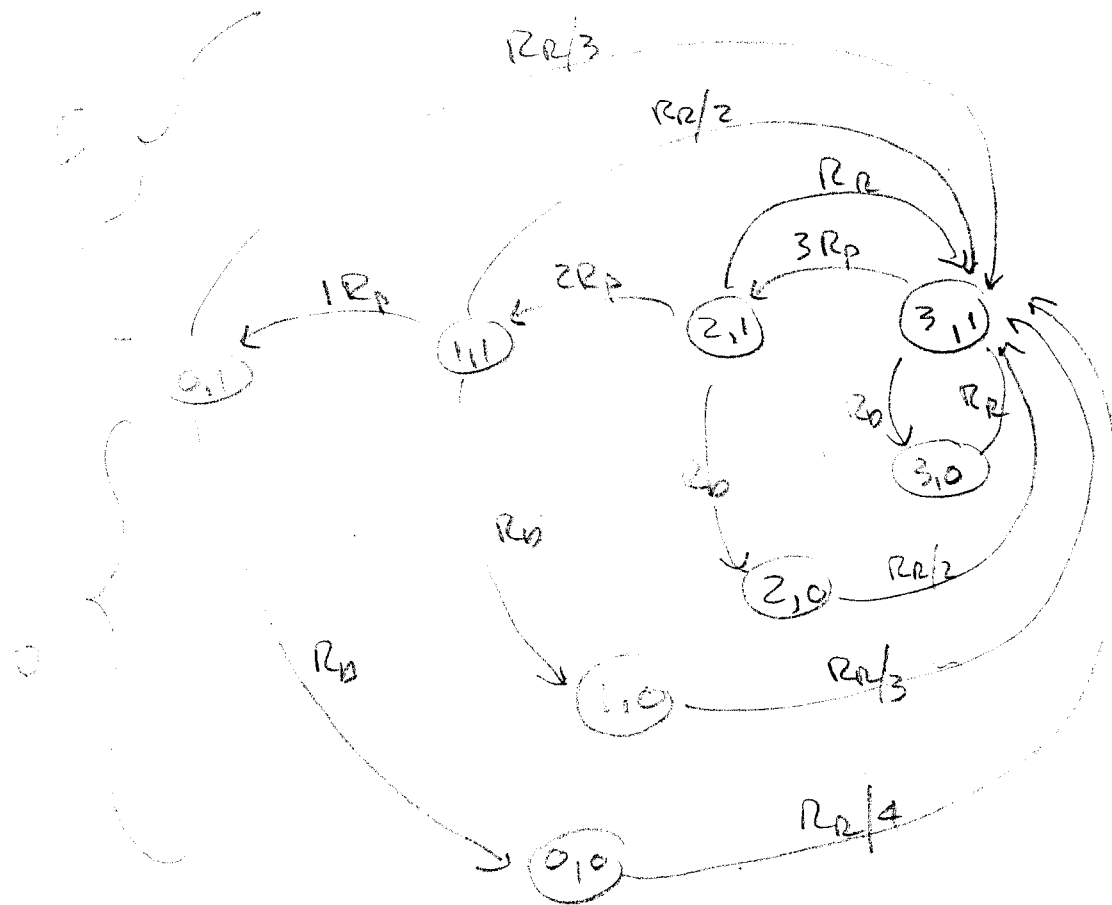

5

5