

Paper Number(s): E4.04
SC6
ISE4.9

IMPERIAL COLLEGE OF SCIENCE, TECHNOLOGY AND MEDICINE
UNIVERSITY OF LONDON

DEPARTMENT OF ELECTRICAL AND ELECTRONIC ENGINEERING
EXAMINATIONS 2002

MSc and EEE/ISE PART IV: M.Eng. and ACGI

ADVANCED DATA COMMUNICATIONS

Tuesday, 7 May 10:00 am

There are FOUR questions on this paper.

Answer THREE questions.

Corrected Copy

Time allowed: 3:00 hours

Examiners responsible:

First Marker(s): Gurcan, M.K.

Second Marker(s): Constantinides, A.G.

Special Instructions for Invigilators: None

Information for candidates:

Useful equations

Suppose $g(t)$ and $G(f)$ are Fourier transform pairs such that

$$g(t) \Leftrightarrow G(f)$$

where

$$G(f) = \int_{-\infty}^{\infty} g(t) \exp(-j2\pi f t) dt \text{ and}$$

$$g(t) = \int_{-\infty}^{\infty} G(f) \exp(j2\pi f t) df.$$

Then the following Fourier transform relationships might be useful

$$g(t) = \text{rect}\left(\frac{t}{T}\right) \Leftrightarrow G(f) = T \text{sinc}(fT)$$

$$g(t) = \frac{1}{2}[\delta(t-t_0) + \delta(t+t_0)] \Leftrightarrow G(f) = \cos(2\pi f t_0)$$

$$g(t) = \sin(2\pi f_c t) \Leftrightarrow G(f) = \frac{1}{2j}[\delta(f-f_c) - \delta(f+f_c)].$$

$$g(t) = \delta(t) \Leftrightarrow G(f) = 1$$

$$x(t) = \text{sinc}\left(\frac{t}{T}\right) \frac{\cos\left(\frac{\pi \alpha t}{T}\right)}{1 - \frac{4\alpha^2 t^2}{T^2}} \Leftrightarrow X_{RC}(f) = \begin{cases} T, & 0 \leq |f| \leq \frac{1-\alpha}{2T} \\ \frac{T}{2} \left\{ 1 + \cos\left(\frac{\pi T}{\alpha} \left(|f| - \frac{1-\alpha}{2T}\right)\right) \right\}, & \frac{1-\alpha}{2T} < |f| \leq \frac{1+\alpha}{2T} \\ 0, & |f| > \frac{1+\alpha}{2T} \end{cases}$$

1. a) A Hadamard matrix is defined as a matrix whose elements are ± 1 and has row vectors which are pairwise orthogonal. In the case when n is a power of 2, an $n \times n$ Hadamard matrix is constructed by means of the recursion

$$H_2 = \begin{bmatrix} 1 & 1 \\ 1 & -1 \end{bmatrix} \quad \text{and} \quad H_{2n} = \begin{bmatrix} H_n & H_n \\ H_n & -H_n \end{bmatrix}.$$

- i) Let c_i denote the i^{th} row of an $n \times n$ Hadamard matrix as defined above. [3]

Show that the waveforms constructed as

$$s_i(t) = \sum_{k=1}^n c_{ik} p(t - k T_c), \quad i = 1, 2, \dots, n$$

are orthogonal, where $p(t)$ is an arbitrary pulse confined to the time interval

$$0 \leq t \leq T_c.$$

- ii) Show that the n matched filters (or cross correlators) for the n waveforms [3]

$\{s_i(t)\}$ can be realised by a single filter (or correlator) matched to the pulse $p(t)$ followed by n correlators using the code words $\{c_i\}$.

- b) The discrete sequence

$$r_k = \sqrt{\varepsilon_b} c_k + n_k, \quad k = 1, 2, \dots, n$$

represents the output sequence of samples from a demodulator, where $c_k = \pm 1$ are elements of one of two possible codewords $c_1 = [1, 1, 1, \dots, 1]$ and

$c_2 = [1, 1, 1, \dots, -1, -1, -1, \dots, -1]$. The codeword c_2 has w elements which are $+1$ and $n-w$ elements which are -1 , where w is some positive integer. The noise sequence $\{n_k\}$ is white Gaussian with variance σ^2 . The term ε_b is the bit energy.

- i) What is the optimum maximum-likelihood sequence detector for the two possible transmitted signals? [3]

- ii) Determine the probability of error as a function of parameter $(\sigma^2, \varepsilon_b, w)$. [2]

- iii) What is the value of w that minimises the error probability? [2]

- c) Consider the four-phase and eight-phase signal constellations shown in Figure 1.1. [4]

Determine the radii r_1 and r_2 of the circles such that the distance between two adjacent points in the two constellations is d . From this result, determine the additional transmitted energy required in the 8-PSK signal to achieve the same error probability as the four-phase signal at high SNR where the probability of error is determined by errors in selecting adjacent points.

Question continued over

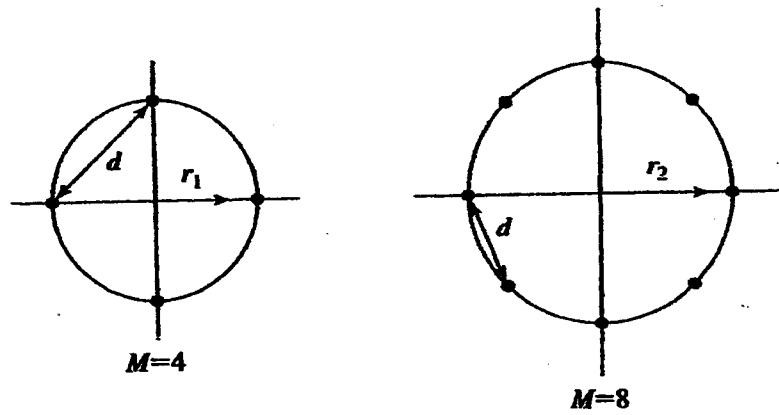


Figure 1.1

- d) In a MSK signal, the initial state for the phase is either 0 or π radians. Determine the terminal phase state for the following four input pairs of input data (a) 00 , (b) 01, (c) 10, (d) 11. [3]

2. a) Consider a four phase PSK signal that is represented by the equivalent lowpass signal.

$$v(t) = \sum_n a_n g(t - nT)$$

where a_n takes on one of the four possible values $\frac{\pm 1 \pm j}{\sqrt{2}}$ with equal probability.

The sequence of information symbols $\{a_n\}$ is statistically independent.

- i) Determine and sketch the power-spectral density of $v(t)$ when [3]

$$g(t) = \begin{cases} A, & 0 \leq t \leq T \\ 0, & \text{otherwise} \end{cases}$$

- ii) Repeat part i) when [3]

$$g(t) = \begin{cases} A \sin \frac{\pi t}{2}, & 0 \leq t \leq T \\ 0, & \text{otherwise} \end{cases}$$

- b) The frequency-response characteristics of a low-pass channel can be approximated by

$$H(f) = \begin{cases} 1 + \alpha \cos 2\pi f t_0, & |\alpha| < 1, \quad |f| \leq W \\ 0, & \text{otherwise} \end{cases}$$

where W is the channel bandwidth. An input signal $s(t)$ whose spectrum is band limited to W Hz is passed through the channel.

- i) Show that the filtered signal is given by $y(t) = s(t) + \frac{\alpha}{2} [s(t - t_0) + s(t + t_0)]$. [2]

- ii) Suppose the received signal $y(t)$ is passed through a filter matched to $s(t)$. Determine the output of the matched filter at $t = kT$, $k = 0, \pm 1, \pm 2, \dots$ where T is the symbol duration. [2]

- iii) What is the ISI pattern resulting from the channel if $t_0 = T$? [2]

Question continued over

- c) Show that a pulse having the raised cosine spectrum given by

[3]

$$X_{RC}(f) = \begin{cases} T, & 0 \leq |f| \leq \frac{1-\alpha}{2T} \\ \frac{T}{2} \left\{ 1 + \cos \left(\frac{\pi T}{\alpha} \left(|f| - \frac{1-\alpha}{2T} \right) \right) \right\}, & \frac{1-\alpha}{2T} \leq |f| \leq \frac{1+\alpha}{2T} \\ 0, & |f| > \frac{1+\alpha}{2T} \end{cases}$$

satisfies the Nyquist criterion given by equation

$$x(nT) = \begin{cases} 1, & n = 0 \\ 0, & n \neq 0 \end{cases}$$

for any value of the roll-off factor α . Here n is an integer.

- d) An M-ary Pulse Amplitude Modulation communication system transmits data at a rate of 4800 symbols/s over a channel with frequency (magnitude) response

$$|C(f)| = \frac{1}{\sqrt{1 + \left(\frac{f}{W} \right)^2}} \quad \text{for } |f| \leq W$$

where $W = 4800$ Hz. The additive noise is zero-mean, white, Gaussian with power spectral density $N_0/2 = 10^{-15}$ W/Hz.

- i) Suppose that we select the filter at the transmitter to have the frequency [3]

$$\text{response } G_T(f) = \frac{\sqrt{X_{RC}(f)}}{C(f)} \exp(-j2\pi f t_0). \text{ Here } t_0 \text{ is a suitable delay to}$$

ensure causality. Determine the magnitude of the transmitting and receiving filter characteristics.

- ii) Assume that the transmitting and receiving filters satisfy [2]

$$|G_T(f)| |G_R(f)| = X_{RC}(f).$$

If the channel, $C(f)$, is equalised by a zero forcing equaliser, determine the value of the noise variance at the sampling instants and the probability of error.

- 3 a) The convolution encoder shown in Figure 3.1 is used to send the data sequence 1 1 0 1 1 over a binary symmetric channel.

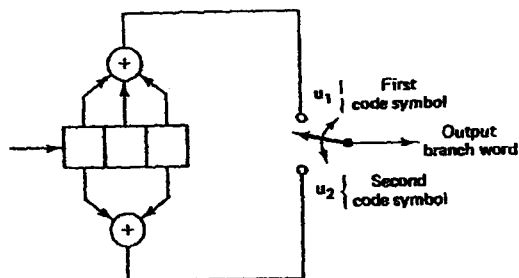


Figure 3.1


Assume that the encoder is initialised with data 0 0 0.

- Draw the trellis diagram for the encoder.
- Produce the transmitted codeword.
- If the received sequence is

11 01 01 10 01

using the Viterbi algorithm identify the surviving paths over a five symbol period and hence show how the Viterbi algorithm corrects the received sequence.

- b) The truncated encoder given in part a is used in a soft decision system. The binary input discrete multi channel for this system is shown in Figure 3.2 together with the channel transition probabilities along with log-likelihood metrics for all the transitions.

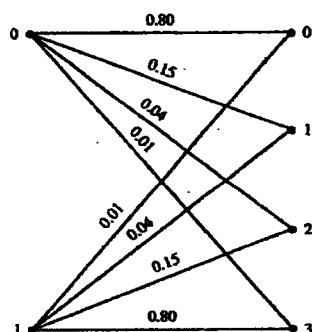

$$\ln[\Pr(0|0)] = \ln[\Pr(3|1)] = \ln[0.80] = -0.22$$

$$\ln[\Pr(1|0)] = \ln[\Pr(2|1)] = \ln[0.15] = -1.90$$

$$\ln[\Pr(2|0)] = \ln[\Pr(1|1)] = \ln[0.04] = -3.22$$

$$\ln[\Pr(3|0)] = \ln[\Pr(0|1)] = \ln[0.01] = -4.61$$

Figure 3.2

Use the trellis description of the encoder and the soft decision received sequence 32 21 33 32 02 32 03 to

- Produce the branch metrics and surviving paths over six symbol periods.
- Decode the soft decision received sequence.

- 4 a) A trellis-coded modulation system uses an 8-ary PAM signal set given by $\{\pm 1, \pm 3, \pm 5, \pm 7\}$ and the 4-state trellis encoder shown in Figure 4.1
- i) Using the set partitioning rules, partition the signal set into four subsets. [3]
- ii) If the channel is additive white Gaussian noise, and at the output of the matched filter the sequence $(-0.2, 1.1, 6, 4, -3, -4.8, 3.3)$ is observed, what is the most likely transmitted sequence? [5]

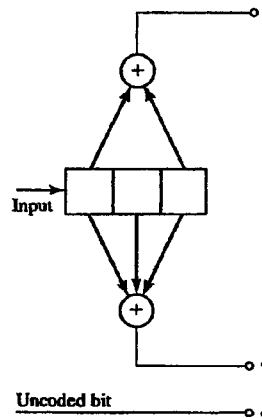


Figure 4.1

- b) Design an OFDM system with the following requirements [5]
- Bit rate 30Mbps.
 - Tolerable delay spread 400 ns.
 - Bandwidth less than 13 MHz.
- c) Suppose that a turbo encoder is described by the trellis shown in Figure 4.2 where we assume that the depth of the trellis for the received sequence is N stages and we are considering stage i .
- i) Describe how the BJCR algorithm is used recursively to calculate the log-likelihood ratios. [5]
- ii) Describe how the decoder bit error rate performance improves as the number of iterations increases. [2]

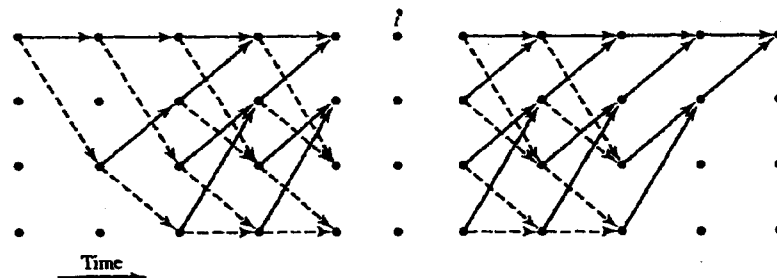


Figure 4.2

Advanced Data Communications 2002				Confidential
MODEL ANSWER and MARKING SCHEME				
First Examiner	Dr. M.K. Gurcan	Paper Code		
Second Examiner	Prof. A.G. Constantinides	Question 1a	Page 2	out of
Question labels in left margin		Marks allocations in right margin		
<p>that is a sequence of impulses starting at $t=0$ and weighted by the mirror image sequence of $\{c_i\}$. Since</p> $s(t) = \sum_{k=0}^n c_k p(t - kT_c) = p(t) * \sum_{k=0}^n c_k \delta(t - kT_c)$ <p>the Fourier transform of the signal $s(t)$ is</p> $S(f) = P(f) \sum_{k=0}^n c_k \exp(-j2\pi f k T_c)$ <p>and therefore, the Fourier transform of the signal matched to $s(t)$ is</p> $\begin{aligned} H(f) &= S^*(f) \exp(-j2\pi f T) = S^*(f) \exp(-j2\pi f n T_c) \\ &= P^*(f) \sum_{k=0}^n c_k \exp(j2\pi f k T_c) \exp(-j2\pi f n T_c) \\ &= P^*(f) \sum_{k=0}^n c_{n-i+1} \exp(-j2\pi f (i-1) T - c) \\ &= P^*(f) F[g(t)] \end{aligned}$ <p>Thus the matched filter $h(f)$ can be considered as the cascade of a filter with impulse response $p(t)$, matched to the pulse $p(t)$ and a filter, with impulse response $g(t)$, matched to the signal</p> $y(t) = \sum_{k=0}^n c_k \delta(t - kT_c).$				

Advanced Data Communications 2002 MODEL ANSWER and MARKING SCHEME				Confidential
First Examiner	Dr. M.K. Gurcan	Paper Code		
Second Examiner	Prof. A.G. Constantinides	Question 1a	Page 1	out of
Question labels in left margin		Marks allocations in right margin		
i)	<p>The inner product of $s_i(t)$ and $s_j(t)$ is</p> $\int_{-\infty}^{\infty} s_i(t) s_j(t) dt = \int_{-\infty}^{\infty} \sum_{k=1}^n c_{ik} p(t - kT_c) \sum_{l=1}^n c_{jl} p(t - lT_c) dt$ $= \sum_{k=1}^n \sum_{l=1}^n c_{ik} c_{jl} \int_{-\infty}^{\infty} p(t - kT_c) p(t - lT_c) dt$ $= \sum_{k=1}^n \sum_{l=1}^n c_{ik} c_{jl} \sum_p \delta_{kl} = \sum_p \sum_{k=1}^n c_{ik} c_{jk}$ <p>The quantity $\sum_{k=1}^n c_{ik} c_{jk}$ is the inner product of the row vectors \underline{c}_i and \underline{c}_j. Since the rows of the matrix H_n are orthogonal by construction, we obtain</p> $\int_{-\infty}^{\infty} s_i(t) s_j(t) dt = \sum_p \sum_{k=1}^n c_{ik} \delta_{kl} = n \sum_p \delta_{ij}$ <p>Thus the waveforms $s_i(t)$ and $s_j(t)$ are orthogonal.</p> <p>---//---</p> <p>First we consider the signal</p> $y(t) = \sum_{k=1}^n c_k \delta(t - kT_c)$ <p>The signal $y(t)$ has duration $T = nT_c$ and its matched filter is</p> $g(t) = y(T - t) = y(nT_c - t) = \sum_{k=1}^n c_n \delta(nT_c - kT_c - t)$ $= \sum_{k=1}^n c_{n-i+1} \delta((n-i+1)T - t) = \sum_{k=1}^n c_{n-i+1} \delta(t - (n-i+1)T)$			
ii)				

First Examiner	Dr M.K. Gurcan	Paper Code	
Second Examiner	Prof. A.G. Constantinides	Question 1a	Page 3 out of
Question labels in left margin		Marks allocations in right margin	

The output of the matched filter at

$$t = nT_c \text{ is } \int_{-\infty}^{\infty} |s(t)|^2 = \sum_{k=1}^n c_k \int_{-\infty}^{\infty} p^2(t - kT_c) dt$$

$$= T_c \sum_{k=1}^n c_k^2$$

Where we have used the fact $p(t)$ is a rectangular pulse of unit amplitude and duration T_c .

Using the above result we obtain the filter matched to the waveform

$$s_i(t) = \sum_{k=1}^n c_k p(t - kT_c)$$

Can be realised as the cascade of a filter matched to $p(t)$ followed by a discrete-time filter matched to the vector $\underline{c}_i = [c_{i1}, \dots, c_{in}]$. Since the pulse $p(t)$ is common to all the signal waveforms $s_i(t)$ we conclude that the n matched filters can be realised by a filter matched to $p(t)$ followed by n discrete-time filters matched to vectors $\underline{c}_i, i=1, \dots, n$.

First Examiner	Dr M.K. Gurcan	Paper Code	
Second Examiner	Prof. A.G. Constantinides	Question 1b	Page 4 out of
Question labels in left margin		Marks allocations in right margin	

i) The optimal maximum likelihood selects the sequence \underline{c}_i that minimizes the quantity

$$\lambda_i = \sum_{k=1}^n (r_k - \sqrt{E_b} c_{ik})^2$$

The metrics of the two possible transmitted sequences are

$$\lambda_1 = \sum_{k=1}^w (r_k - \sqrt{E_b})^2 + \sum_{k=w+1}^n (r_k - \sqrt{E_b})^2$$

$$\lambda_2 = \sum_{k=1}^w (r_k - \sqrt{E_b})^2 + \sum_{k=w+1}^n (r_k + \sqrt{E_b})^2$$

Since the first terms of the right side of the two equations are common, we conclude that the optimal maximum likelihood detector can base its decisions only on the last $n-w$ received elements of r . That is

$$\sum_{k=w+1}^n (r_k - \sqrt{E_b})^2 - \sum_{k=w+1}^n (r_k + \sqrt{E_b})^2 \stackrel{?}{\leq} 0$$

Or equivalently

$$\sum_{k=w+1}^n r_k \stackrel{?}{\geq} 0$$

Advanced Data Communications 2002					Confidential
MODEL ANSWER and MARKING SCHEME					
First Examiner	Dr. M.K. Gurcan	Paper Code	Question 1b	Page 5	out of
Second Examiner	Prof. A.G. Constantinides	Question 1c	Page 8	out of	
Question labels in left margin		Marks allocations in right margin			
ii)	<p>Since $r_k = \sqrt{E_b} c_k + n_k$, the probability of error $P(e c_1)$ is</p> $P(e c_1) = P(\sqrt{E_b}(n-w) + \sum_{k=w+1}^n n_k < 0)$ $= P(\sum_{k=w+1}^n n_k < -(n-w)\sqrt{E_b})$ <p>The random variable $u = \sum_{k=w+1}^n n_k$ is zero-mean Gaussian with variance $\sigma_u^2 = (n-w)\sigma_n^2$.</p> <p>Hence</p> $P(e c_1) = \frac{1}{\sqrt{2\pi(n-w)\sigma_n^2}} \int_{-\sqrt{E_b}(n-w)}^0 \exp\left(-\frac{x^2}{2(n-w)\sigma_n^2}\right) dx$ $= Q\left[\sqrt{\frac{E_b(n-w)}{\sigma_n^2}}\right]$ <p>Similarly we find</p> $P(e c_2) = P(e c_1) \text{ and since two sequences are equiprobable}$ $P(e) = \frac{1}{2} P(e c_2) + \frac{1}{2} P(e c_1) = Q\left[\sqrt{\frac{E_b(n-w)}{\sigma_n^2}}\right]$ <p>The probability of error $P(e)$ is minimised when $\frac{E_b(n-w)}{\sigma_n^2}$ is maximised, that is for $w=0$. This implies that $c_1 = -c_2$ and thus the distance between the sequences is the maximum possible.</p>				
iii)					

Advanced Data Communications 2002					Confidential
MODEL ANSWER and MARKING SCHEME					
First Examiner	Dr. M.K. Gurcan	Paper Code	Question 1c	Page 8	out of
Second Examiner	Prof. A.G. Constantinides	Question 1c	Page 8	out of	
Question labels in left margin		Marks allocations in right margin			
<p>Using the pythagorean theorem for the four-phase constellation, we find</p> $r_1^2 + r_2^2 = d^2 \Rightarrow r_1 = \frac{d}{\sqrt{2}}$ <p>The radius of the 8-PSK constellation is found using the cosine rule. Thus</p> $d^2 = r_1^2 + r_2^2 - 2r_1r_2 \cos(45^\circ) = r_2^2 = \frac{d^2}{\sqrt{2-\sqrt{2}}}$ <p>Thus the additional transmitted power needed by the 8-PSK signal is</p> $P = 10 \log_{10} \frac{2d^2}{(2-\sqrt{2})d^2} = 5.3329 \text{ dB}$ <p>We obtain the same results if we use the probability of error given by</p> $P_M = 2Q\left[\sqrt{2\rho_2} \sin \frac{\pi}{M}\right]$ <p>where ρ_s is the SNR per symbol. In this case, equal error probability for the two signalling schemes implies that</p> $\rho_{4,5} \sin^2 \frac{\pi}{4} = \rho_{8,5} \sin^2 \frac{\pi}{8} \Rightarrow 10 \log_{10} \frac{\rho_{8,5}}{\rho_{4,5}}$ $= 20 \log_{10} \frac{\sin \frac{\pi}{4}}{\sin \frac{\pi}{8}} = 5.3329 \text{ dB.}$					

First Examiner	Dr. M.K. Gurcan	Paper Code	Question 1d	Page 7	out of
Second Examiner	Prof. A.G. Constantinides	Question 1d	Page 7	out of	
Marks allocations in right margin					

Question labels in left margin

We assume that the input bits 0, 1 are mapped to the symbols -1 and 1 respectively. The terminal phase of an MSK signal at time instant n is given by

$$\theta(n, a) = \pi \sum_{k=0}^n a_k + \theta_0$$

Where θ_0 is the initial and a_k is ± 1 depending on the input bit at the time instant k . The following table shows $\theta(n, a)$ for two different values of $\theta_0(0, \pi)$, and four input pairs of data $\{00, 01, 10, 11\}$

θ_0	$b_0 b_1$	$a_0 a_1$	$\theta(n, a)$
0	0 0	-1 -1	$-\pi$
0	0 1	-1 1	0
0	1 0	1 -1	0
0	1 1	1 1	π
π	0 0	-1 -1	0
π	0 1	-1 1	π
π	1 0	1 -1	π
π	1 1	1 1	2π

First Examiner	Dr. M.K. Gurcan	Paper Code	Question 2a	Page 8	out of
Second Examiner	Prof. A.G. Constantinides	Question 2a	Page 8	out of	
Marks allocations in right margin					

Question labels in left margin

i) The autocorrelation function of the information symbols $\{a_n\}$ is


$$R_a(k) = E(a_n^* a_{n+k}) = \frac{1}{T} \int_0^T |a_n|^2 \delta(k) = \delta(k)$$

Thus, the power spectral density of $v(t)$ is

$$S_v(f) = \frac{1}{T} S_a(f) \quad |G(f)|^2 = \frac{1}{T} |G(f)|^2$$

Where $G(f) = \int_0^T g(t) dt$. If $g(t) = A \cdot \text{rect}(t - \frac{T}{2})$, we obtain $|G(f)|^2 = A^2 T^2 \text{sinc}^2(fT)$ and therefore,

$$S_v(f) = A^2 T \text{sinc}^2(fT)$$

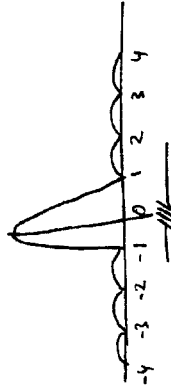

If $g(t) = A \cdot \text{sinc}(\frac{\pi t}{2}) \text{rect}(\frac{t - \frac{T}{2}}{T})$ then,



$$G(f) = A \left[\frac{1}{2} \delta(f - \frac{1}{4}) - \frac{1}{2} \delta(f + \frac{1}{4}) \right] * \text{sinc}(fT) \exp(-j2\pi f \frac{T}{2})$$

$$= \frac{A T}{2} \left[\delta(f - \frac{1}{4}) - \delta(f + \frac{1}{4}) \right] * \text{sinc}(fT) \exp(-j2\pi f \frac{T}{2})$$

$$= \frac{A T}{2} \exp(-j2\pi f \frac{T}{2}) \left[\text{sinc}((f - \frac{1}{4})T) - \text{sinc}((f + \frac{1}{4})T) \exp(j2\pi f \frac{T}{2}) \right]$$

Thus

$$|G(f)|^2 = \frac{A^2 T^2}{4} \left[\text{sinc}^2((f - \frac{1}{4})T) + \text{sinc}^2((f + \frac{1}{4})T) - 2 \text{sinc}((f - \frac{1}{4})T) \text{sinc}((f + \frac{1}{4})T) \cos \frac{\pi T}{2} \right]$$

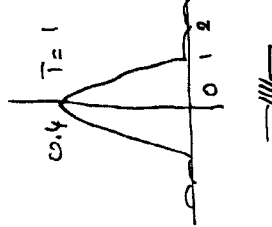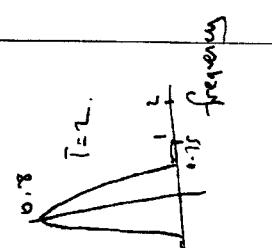Advanced Data Communications 2002				Confidential
MODEL ANSWER and MARKING SCHEME				
First Examiner	Dr M.K. Gurcan	Paper Code		
Second Examiner	Prof. A.G. Constatinides	Question 2b	Page 9	out of
Question labels in left margin		Marks allocations in right margin		
<p>and the power spectral density of the transmitted signal is</p> $S_u(f) = \frac{A^2 T}{2} \left[\text{sinc}^2 \left(\left(f + \frac{1}{4} \right) T \right) + \text{sinc}^2 \left(\left(f - \frac{1}{4} \right) T \right) \right]$ $- 2 \text{sinc} \left(\left(f + \frac{1}{4} \right) T \right) \text{sinc} \left(\left(f - \frac{1}{4} \right) T \right) \cos \frac{\pi T}{2}$ <p>The plot of $S_u(f)$ for two special values of the time interval T. The amplitude of the signal A was set to 1 for both cases.</p> <div style="display: flex; justify-content: space-around; align-items: flex-end;">   </div>				

Advanced Data Communications 2002				Confidential
MODEL ANSWER and MARKING SCHEME				
First Examiner	Dr. M.K. Gurcan	Paper Code		
Second Examiner	Prof. A.G. Constatinides	Question 2b	Page 10	out of
Question labels in left margin		Marks allocations in right margin		

i) Taking the inverse Fourier transform of $H(f)$, we obtain

$$h(t) = \mathcal{F}^{-1}[H(f)] = \delta(t) + \frac{\alpha}{2} \delta(t-t_0) + \frac{\alpha}{2} \delta(t+t_0)$$

Hence

$$y(t) = s(t) * h(t) = s(t) + \frac{\alpha}{2} s(t-t_0) + \frac{\alpha}{2} s(t+t_0)$$

ii) If the signal $s(t)$ is used to modulate the sequence $\{a_n\}$, then the transmitted signal

$$u(t) = \sum_{n=-\infty}^{\infty} a_n s(t-nT)$$

The received signal is the convolution of $u(t)$ with $h(t)$. Hence

$$y(t) = u(t) * h(t) = \left(\sum_{n=-\infty}^{\infty} a_n s(t-nT) \right) * \left(\delta(t) + \frac{\alpha}{2} \delta(t-t_0) + \frac{\alpha}{2} \delta(t+t_0) \right)$$

$$= \sum_{n=-\infty}^{\infty} a_n s(t-nT) + \frac{\alpha}{2} \sum_{n=-\infty}^{\infty} a_n s(t-t_0-nT) + \frac{\alpha}{2} \sum_{n=-\infty}^{\infty} a_n s(t+t_0-nT)$$

Thus, the output of the matched filter $s(t)$ at the time instant t_f is

$$w(t_f) = \sum_{n=-\infty}^{\infty} a_n \int_{-\infty}^{\infty} s(\tau-nT) s(\tau-t_f) d\tau$$

$$+ \frac{\alpha}{2} \sum_{n=-\infty}^{\infty} a_n \int_{-\infty}^{\infty} s(\tau-t_0-nT) s(\tau-t_f) d\tau$$

$$+ \frac{\alpha}{2} \sum_{n=-\infty}^{\infty} a_n \int_{-\infty}^{\infty} s(\tau+t_0-nT) s(\tau-t_f) d\tau$$

Advanced Data Communications 2002				Confidential
MODEL ANSWER and MARKING SCHEME				
First Examiner	Dr. M.K. Gurcan	Paper Code		
Second Examiner	Prof. A.G. Constatinides	Question 2b	Page 11	out of
Question labels in left margin		Marks allocations in right margin		
<p>If we denote the signal $s(t) * s(t)$ by $x(t)$, then the output of the matched filter at $t_1 = kT$ is</p> $w(kT) = \sum_{n=-\infty}^{\infty} a_n x(kT - nT)$ $+ \frac{\alpha}{2} \sum_{n=-\infty}^{\infty} a_n x(kT - t_0 - nT) + \frac{\alpha}{2} \sum_{n=-\infty}^{\infty} a_n x(kT + t_0 - nT)$ <p style="text-align: center;">11</p> <p>With $t_0 = T$ and $k = n$ in the previous equation, we obtain.</p> $w_k = a_k x_0 + \sum_{n \neq k} a_n x_{k-n}$ $+ \frac{\alpha}{2} a_k x_{k-1} + \frac{\alpha}{2} \sum_{n \neq k} a_n x_{k-n-1} + \frac{\alpha}{2} a_k x_1$ $+ \frac{\alpha}{2} \sum_{n \neq k} a_n x_{k-n+1}$ $= a_k (x_0 + \frac{\alpha}{2} x_{-1} + \frac{\alpha}{2} x_1) + \sum_{n \neq k} a_n [x_{k-n} + \frac{\alpha}{2} x_{k-n-1} + \frac{\alpha}{2} x_{k-n+1}]$ <p>The term under the summation is the ISI introduced by the channel.</p>				
iii)				

Advanced Data Communications 2002				Confidential
MODEL ANSWER and MARKING SCHEME				
First Examiner	Dr. M.K. Gurcan	Paper Code		
Second Examiner	Prof. A.G. Constatinides	Question 2c	Page 12	out of
Question labels in left margin			Marks allocations in right margin	
<p>The pulse $x(t)$ having the raised cosine spectrum is</p> $x(t) = \text{sinc}(t/T) \frac{\cos(\frac{\pi \alpha t}{T})}{1 - 4\alpha^2 t^2/T^2}$ <p>The function $\text{sinc}(\frac{t}{T})$ is 1 when $t=0$ and 0 when $t=nT$. On the other hand</p> $g(t) = \cos(\frac{\pi \alpha t}{T}) = \begin{cases} 1 & t=0 \\ \frac{1 - 4\alpha^2 t^2}{T^2} & \text{bounded } t \neq 0 \end{cases}$ <p>The function $g(t)$ needs to be checked only for those values of t such that $\frac{4\alpha^2 t^2}{T^2} = 1$ or $\alpha t = \frac{T}{2}$.</p> <p>However</p> $\lim_{\alpha t \rightarrow \frac{T}{2}} \frac{\cos(\frac{\pi \alpha t}{T})}{1 - 4\alpha^2 t^2/T^2} = \lim_{x \rightarrow 1} \frac{\cos(\frac{\pi}{2} x)}{1-x}$ <p>and by using L'Hospital rule</p> $\lim_{x \rightarrow 1} \frac{\cos(\frac{\pi}{2} x)}{1-x} = \lim_{x \rightarrow 1} \frac{-\frac{\pi}{2} \sin(\frac{\pi}{2} x)}{-1} = \frac{\pi}{2}$ <p>Hence</p> $x(nT) = \begin{cases} 1 & n=0 \\ 0 & n \neq 0 \end{cases}$ <p>meaning that the pulse $x(t)$ satisfies the Nyquist criterion,</p>				

Advanced Data Communications 2002

Confidential

MODEL ANSWER and MARKING SCHEME

First Examiner Dr. M.K. Gurcan

Paper Code

Second Examiner Prof. A.G. Constatinides

Question 2d Page 13 out of

Question labels in left margin

Marks allocations in right margin

i) Since $W = \frac{1}{T} = 4800$, we use a signal pulse with a raised cosine spectrum and $\alpha = 1$.
Thus

$$X_{RC}(f) = \frac{T}{2} \left[1 + \cos(\pi T |f|) \right] = T \cos^2 \left(\frac{\pi |f|}{2W} \right)$$

Then

$$|G_T(f)| = \sqrt{T \left[1 + \left(\frac{f}{W} \right)^2 \right]} \cos \frac{\pi |f|}{9600}, \quad |f| \leq 4800 \text{ Hz}$$

~~For~~

$$|G_R(f)| = T \cos \frac{\pi |f|}{9600}, \quad |f| \leq 4800 \text{ Hz}$$

$$\text{and } |G_T(f)| = |G_R(f)| = 0 \quad \text{for } |f| > 4800 \text{ Hz}$$

ii) When the noise is white, the variance of the noise at the output of zero forcing equaliser is given by

$$\sigma_v^2 = \frac{N_0}{V} \int_{-W}^W \frac{X_{RC}(f)}{|C(f)|^2} df = \frac{T N_0}{2} \int_{-W}^W \left[1 + \left(\frac{f}{W} \right)^2 \right] \cos^2 \frac{\pi |f|}{2W} df$$

$$= N_0 \int_0^1 (1+x^2) \cos^2 \frac{\pi x}{2} dx$$


$$= \left(\frac{2}{3} - \frac{1}{\pi^2} \right) N_0$$

Advanced Data Communications 2002					Confidential
MODEL ANSWER and MARKING SCHEME					
First Examiner	Dr. M.K. Gurcan	Paper Code	Question	2d	Page 14 out of
Second Examiner	Prof. A.G. Constatinides				
Question labels in left margin		Marks allocations in right margin			
<p>The average transmitted power is</p> $P_{av} = \frac{(M^2-1)d^2}{3T} \int_{-W}^W G_T(f) ^2 df.$ $= \frac{(M^2-1)d^2}{3T} \int_{-\infty}^{\infty} X_{RC}(f) ^2 df.$ $= \frac{(M^2-1)d^2}{3T}$ <p>The general expression for the probability of error is given as</p> $P_m = \frac{2(M-1)}{M} Q \left(\sqrt{\frac{3 P_{av} T}{(M^2-1) \left(\frac{2}{3} - 1/\pi^2 \right) N_0}} \right)$ <p>If the channel is ideal, the argument of the Q function would be $6 P_{av} T / (M^2-1) N_0$. Hence the loss in performance due to the non-ideal channel is given by the factor $2 \left(\frac{2}{3} - \frac{1}{\pi^2} \right) = 1.113$ or 0.54 dB.</p>					

Advanced Data Communications 2002
MODEL ANSWER and MARKING SCHEME

Confidential


First Examiner	Dr. M.K. Gurcan	Paper Code
Second Examiner	Prof. A.G. Constatindes	Question 3a Page 15 out of
Question labels in left margin		
Marks allocations in right margin		


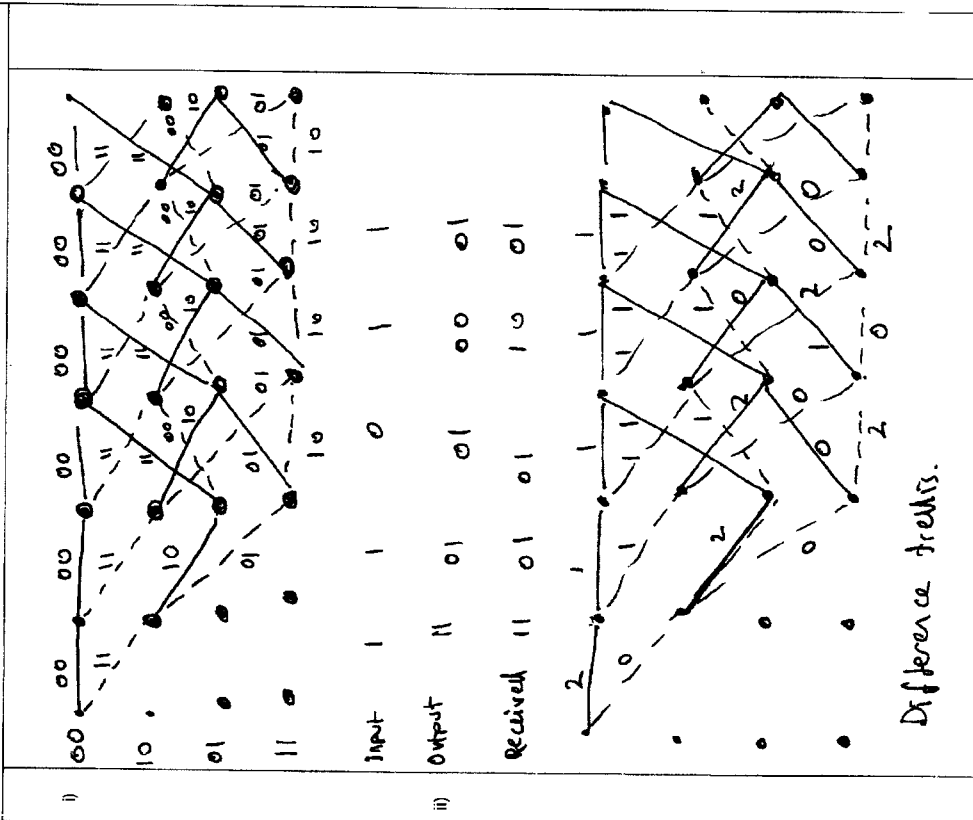






Advanced Data Communications 2002
MODEL ANSWER and MARKING SCHEME

Confidential

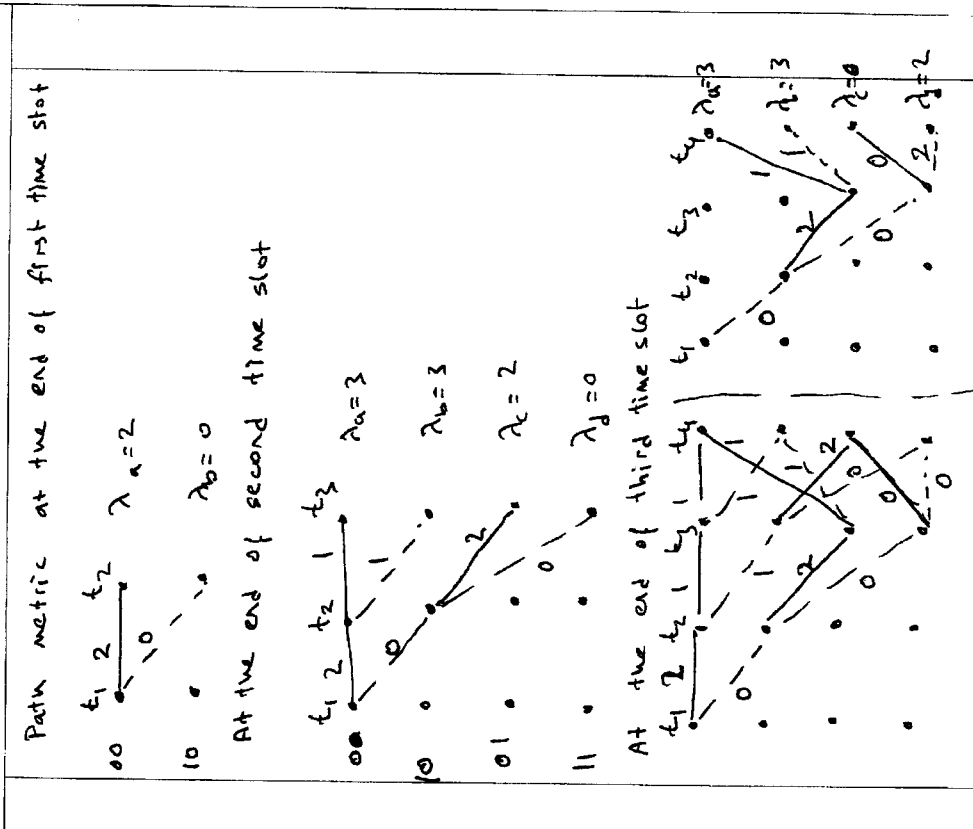First Examiner	Dr. M.K. Gurcan	Paper Code
Second Examiner	Prof. A.G. Constatindes	Question 3a Page 16 out of
Question labels in left margin		
Marks allocations in right margin		

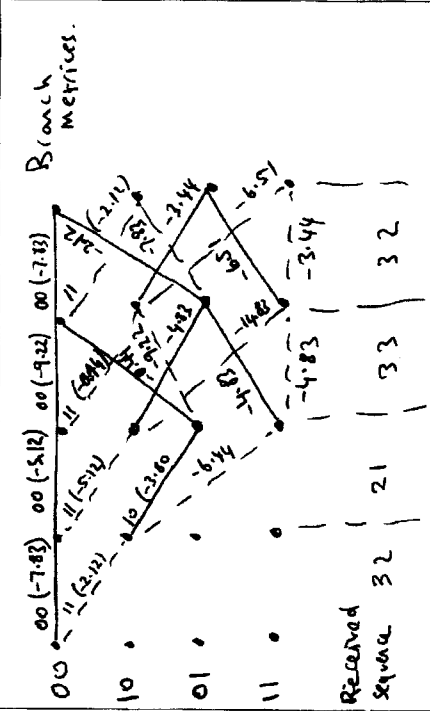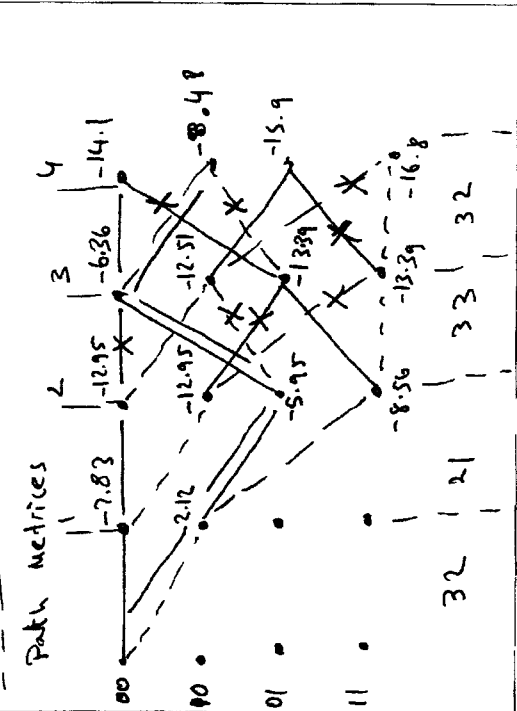

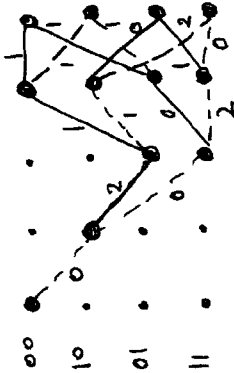Advanced Data Communications 2002				Confidential
MODEL ANSWER and MARKING SCHEME				
First Examiner	Dr. M.K. Gurcan	Paper Code		
Second Examiner	Prof. A.G. Constatinides	Question	3b	Page 18 out of
Question labels in left margin		Marks allocations in right margin		
i)		 <p>Branch Metrics.</p> <p>Received Sequence 32 21 33 32 </p>		
ii)		 <p>Path Metrics</p> <p>Received data 1 0 0 1</p>		

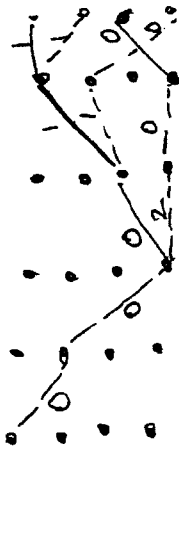Advanced Data Communications 2002				Confidential
MODEL ANSWER and MARKING SCHEME				
First Examiner	Dr. M.K. Gurcan	Paper Code		
Second Examiner	Prof. A.G. Constatinides	Question	3a	Page 17 out of
Question labels in left margin		Marks allocations in right margin		
		<p>Received Sequence 1 1 0 1 1</p>		
		<p>Received data 1 0 0 1</p>		
		<p>Received data 1 0 0 1</p>		
		<p>Received data 1 0 0 1</p>		

Advanced Data Communications 2002

MODEL ANSWER and MARKING SCHEME

Confidential

First Examiner Dr. M.K. Gurcan

Second Examiner Prof. A.G. Constatinides

Paper Code

Question 3b

Page 20

out of

Question labels in left margin

Marks allocations in right margin

The portion of the 8 PSK constellation in four subsets is undertaken as follows

The next figure shows one frame of the trellis used to decode the received sequence. Each branch consists of two transitions which correspond to elements in the same coset in the final partition level.

Advanced Data Communications 2002

MODEL ANSWER and MARKING SCHEME

Confidential

First Examiner Dr. M.K. Gurcan

Second Examiner Prof. A.G. Constatinides

Paper Code

Question 3b

Page 19

out of

Question labels in left margin

Marks allocations in right margin

Advanced Data Communications 2002				Confidential
MODEL ANSWER and MARKING SCHEME				
First Examiner	Dr. M.K. Gurcan	Paper Code		
Second Examiner	Prof. A.G. Constatinides	Question 4b	Page 22	out of
Question labels in left margin		Marks allocations in right margin		
<p>Delay spread = 400 ns.</p> <p>Guard time = 4x delay spread = 1.6 μs.</p> <p>Symbol duration = 6 x 1.6 = 9.6 μs.</p> <p>Sub carrier spacing = $\frac{1}{(5.6-1.6)10^{-6}} = 125 \text{ kHz}$</p> <p>Number of bits per symbol</p> <p>$X \cdot \frac{1}{9.6 \cdot 10^{-6}} = 30 \cdot 10^6$</p> <p>$X = 288 \text{ bits.}$</p> <p>Use 96 carriers and rate 3/4 to get the required number of bits per Symbol</p> <p>$\frac{3}{4} 96 \cdot n = 288$</p> <p>$n = 4 \text{ bits per carrier}$</p> <p>$2^4 = 16 \text{ QAM is required.}$</p> <p>Required transmission bandwidth</p> <p>$96 \times 125 = 12 \text{ MHz} < 13 \text{ MHz max bandwidth.}$</p>				

Advanced Data Communications 2002				Confidential
MODEL ANSWER and MARKING SCHEME				
First Examiner	Dr. M.K. Gurcan	Paper Code		
Second Examiner	Prof. A.G. Constatinides	Question 4a	Page 21	out of
Question labels in left margin		Marks allocations in right margin		
<p>The next figure gives the operation of the Viterbi Algorithm for the decoding of the sequence (-0.2, 1.1, 6, 4, -3, -4.8, 3.3). We assume that we start at the all zero state and that a sequence of zeros terminates the input bit stream in order to clear the encoder. The numbers at the nodes indicate the minimum Euclidean distance, and the branches have been marked with the transmitted symbol. The paths that have been pruned are marked with an X</p>		<p>Decoded sequence</p> <p>1 3 5 3 -5 -3 3</p>		

Advanced Data Communications 2002				Confidential
MODEL ANSWER and MARKING SCHEME				
First Examiner	Dr. M.K. Gurcan	Paper Code	Question 4c	Page 23 out of
Second Examiner	Prof. A.G. Constantinides	Question 4c	Page 23	out of
Question labels in left margin		Marks allocations in right margin		
<p>i) <u>Turbo algorithm.</u></p> <p>1.) initialize the algorithm with boundary conditions $\alpha(0) = \beta(N) = 0$ for all states. except start and finish states.</p> <p>2.) given prior probabilities of $u(i)$, the channel characteristics and the received sequence calculate $\gamma_k(s', s) = f(\tilde{y}_k \tilde{u}_k) P(u_k, i)$ if LLR (u_k) is given $P(u_k = \pm 1) = \frac{\exp(-L(u_k)/2)}{1 + \exp(-L(u_k))}$ also we have $f(\tilde{y}_k \tilde{u}_k) = \prod_{l=1}^N \frac{1}{\sqrt{N_0}} \exp(-\frac{1}{N_0} (y_k - u_k)^2)$</p> <p>3.) calculate $\alpha_k(s')$ and $\beta_{k-1}(s)$ with $\alpha_k(s) = \sum_{\text{all } s'} \gamma(s', s) \alpha_{k-1}(s)$ $\beta_{k-1} = \sum_{\text{all } s'} \gamma_k(s', s) \beta_k(s)$</p>				

Advanced Data Communications 2002

MODEL ANSWER and MARKING SCHEME

Confidential

First Examiner Dr. M.K. Gurcan

Paper Code

Second Examiner Prof. A.G. Constantinides

Question 4c Page 24 out of

Question labels in left margin

Marks allocations in right margin

④ calculate the LLR for u_k .

$$L(u_k | \tilde{y}) = \ln \frac{\sum_{s' | s} \alpha_{k-1}(s') \gamma_k(s', s) \beta_k(s)}{\sum_{s' | s} \alpha_{k-1}(s') \gamma_k(s', s) \beta_k(s)}$$

$$\sum_{s' | s} \alpha_{k-1}(s') \gamma_k(s', s) \beta_k(s)$$

$$(s', s) \Rightarrow u_k = -1$$

⑤ From ④ calculate extrinsic LLR

$$LLR = L_e(u_k) = L(u_k | \tilde{y}) - L(u_k) - L_e \gamma_{k-1}$$

$L(u_k) =$ a-priori information about u_k .

⑥ $L_e(u_k)$ becomes a-priori LLR and the sequence is repeated

ii)