Design of Enterprise IoT: Assignment 1b

Smart Turtle Breeding System (STBS)

Team 01

Jinling Institute of Technology

Date: October 21, 2026

Team members

Li Jingru (Leamon), Student ID 2422441049, 25%

Rong Yicheng (Bacon), Student ID 2422441046, 25%

Zhang Zhengyan (Paul), Student ID 2422441050, 25%

Ye Taohao (Leaf), Student ID 2422441048, 25%

Design scope. This report develops the A1a proposal into a component-level enterprise IoT design. It specifies commercially available field devices, the local and wide-area network, edge/fog and cloud processing, and end-to-end data flows. The device and connectivity profiles are reproduced from the supplied Excel templates so that the required A1b structure is retained.

Contents

1 Task 1: Solution Overview **3**

2 Task 2: IoT Devices **3**

2.1 Overview and suitability 3

2.2 IoT Device Profile 3

3 Task 3: IoT Network Technology **6**

4 Task 4: Fog and Cloud Computing **8**

5 Task 5: Overall Solution Connectivity **11**

5.1 Graphical representation 11

5.2 Description of the diagram 12

6 Task 6: Conclusion **12**

1 Task 1: Solution Overview

The Smart Turtle Breeding System (STBS) serves 20 indoor or semi-closed Chinese soft-shell turtle units. Each unit measures water temperature, pH, turbidity, ammonia, level and flow, while zone equipment monitors feed stock, humidity and video. Four local controllers preserve safe rules when the Internet is unavailable. A managed wired network carries controller telemetry and camera streams to an industrial edge computer, which validates data, detects events, buffers outages and performs video inference. Selected telemetry, alarms and evidence clips are sent securely to a cloud service for long-term records, dashboards and notifications. Operators review unit-specific conditions, feeding and nesting evidence, while technicians receive calibration and equipment-fault information. This design refines A1a by selecting deployable device models and separating deterministic local control, bandwidth-intensive edge analytics and cloud reporting (Munyaev et al., 2026; Prapti et al., 2022; Rastegari et al., 2023).

Word count: 133.

2 Task 2: IoT Devices

2.1 Overview and suitability

The device set favours wired, commercially available instruments because the units are fixed, wet and close to mains power. Industrial 4–20 mA and RS-485 probes tolerate longer runs and expose diagnostics; local PLCs provide bounded control and manual override. Temperature, pH, turbidity, ammonia, level and flow address high-value aquaculture risks, while a hopper sensor verifies feed availability. PoE cameras support activity and nesting evidence without battery maintenance. The selection links directly to the A1a value proposition: fewer routine rounds, earlier fault detection, more consistent feeding and auditable intervention, without making cloud availability a prerequisite for animal safety.

Word count: 91.

2.2 IoT Device Profile

The following pages are exported from the completed 'IoT Device Profile' worksheet in the supplied Excel workbook. The seven-column *Template-2_IoT-Device-Profile* structure is preserved. Each row now identifies a purchasable model, its measurable property, interface and supporting components, with the manufacturer URL shown in the characteristics field. The profile covers the field sensors and actuators used by the network and edge design in Tasks 3–5.

Name	Type	Feature of Interest	Property	Characteristics	Components	Justification
The name of each IoT device	E.g., sensor, actuator, or device	What "thing" is being observed and/or acted upon?	Which aspect(s) of the "thing" is/are being observed and/or acted upon?	What are the characteristics of the device?	What are the components embedded in the device?	Why is the device selected for the proposed IoT solution?
Atlas Scientific Industrial RTD Temperature Kit (KIT-303)	Sensor	Water in each breeding tank	Water temperature	Class-A PT-1000 probe; approx. -55 to 220 °C; transmitter accuracy ±0.1 °C; 4–20 mA; 9–36 VDC. (Atlas Scientific, n.d.) https://atlas-scientific.com/transmitters/rtd-temperature-transmitter/	PT-1000 probe, RTD3 transmitter, immersion fitting, 24 VDC supply, Opta analogue input	Industrial current loop suits long fixed cable runs in a wet plant. The range exceeds the operating envelope and supports continuous local heater control.
Atlas Scientific Industrial pH Kit (KIT-102P)	Sensor	Water in each breeding tank	pH value	pH 0–14; stated accuracy ±0.002; internal PT1000; about 1 s response; 4–20 mA; 3 m cable. (Atlas Scientific, n.d.) https://atlas-scientific.com/kits/industrial-ph-kit/	Industrial pH probe and transmitter, immersion fitting, calibration solutions, 24 VDC supply	Provides a calibrated industrial interface for early detection of unsuitable acidity or alkalinity. Scheduled two/three-point calibration manages drift.
DFRobot Industrial RS485 Turbidity Sensor (SEN0710)	Sensor	Water in each breeding tank	Turbidity	0–1000 NTU; 0.1 NTU resolution; ±5% full scale; IP68; 10–30 VDC; RS-485 Modbus RTU. (DFRobot, n.d.) https://www.dfrobot.com/product-3104.html	Optical probe, Modbus interface, protective stilling tube, 24 VDC supply, shielded RS-485 trunk	A waterproof digital probe supports continuous clarity trends and helps identify filtration problems without noise-prone low-level analogue signals.
DFRobot Industrial Ammonia-Nitrogen and pH Sensor (SEN0711)	Sensor	Water in each breeding tank	Ammonia nitrogen, with pH and temperature compensation	NH3-N 0–100 mg/L; 0.01 mg/L resolution; ±3% full scale; pH 0–14; IP68; RS-485 Modbus RTU; 10–30 VDC. (DFRobot, n.d.) https://www.dfrobot.com/product-3107.html	Ammonia/pH/temperature probe, Modbus transmitter, immersion mount, calibration standards, 24 VDC supply	Direct ammonia indication addresses a high-risk water-quality condition. Compensation channels and local rate-of-change checks reduce false alarms.
DFRobot Submersible Water Level Sensor (KIT0139)	Sensor	Water in each breeding tank	Water depth and level	0–5 m range; ±0.5% full scale; 4–20 mA; 12–36 VDC; IP68 stainless probe. (DFRobot, n.d.) https://www.dfrobot.com/product-1863.html	Pressure probe, vented cable termination, stilling tube, 24 VDC supply, Opta analogue input	Independent level feedback prevents overflow, excessive drainage and dry-running, and verifies bounded water-change commands.
DFRobot Water Flow Sensor (SEN0217 / YF-S201)	Sensor	Tank inlet and drain pipes	Flow rate and transferred volume	1–30 L/min; Hall-effect pulse output; ±5% over 2–30 L/min; 3.5–12 VDC; 1/2-inch fitting. (DFRobot, n.d.) https://www.dfrobot.com/product-1517.html	Two sensors per tank, service unions, screened low-voltage cable, Opta pulse inputs	Inlet and drain totals cross-check level change and expose blocked pipes, pump faults or stuck valves while limiting exchanged volume.
DFRobot A02YYUW Waterproof Ultrasonic Sensor (SEN0311)	Sensor	Feed in each zone hopper	Remaining feed height	3–450 cm range; 3 cm blind zone; ±1 cm; 100 ms response; IP67; 3.3–5 V UART. (DFRobot, n.d.) https://www.dfrobot.com/product-1935.html	Top mount, dust shield, isolated UART interface, hopper-specific distance-to-fill calibration	One sensor per zone hopper provides a low-feed alert. Calibration accounts for the sloped pellet surface and converts distance to an approximate fill percentage.
Atlas Scientific EZO Humidity Probe (EZO-HUM-P-S)	Sensor	Air in each breeding/nesting zone	Relative humidity and air temperature	0–100% RH; stated ±2% RH from 5–95%; 3.3–5 V; UART/I2C; IP67 stainless probe. (Atlas Scientific, n.d.) https://atlas-scientific.com/probes/humidity-probe/	Shielded placement away from spray, isolated interface, mounting bracket, periodic comparison check	Zone humidity reveals condensation risk that can affect electronics and camera visibility, and provides context for nesting-area observations.

Name	Type	Feature of Interest	Property	Characteristics	Components	Justification
The name of each IoT device	E.g., sensor, actuator, or device	What "thing" is being observed and/or acted upon?	Which aspect(s) of the "thing" is/are being observed and/or acted upon?	What are the characteristics of the device?	What are the components embedded in the device?	Why is the device selected for the proposed IoT solution?
Aqua Medic Titanium Heater 500 W	Actuator	Water in each breeding tank	Heat input and water temperature	500 W; 110–240 VAC; intended for about 1000–1500 L; external controller required. (Aqua Medic, n.d.) https://www.aqua-medic.de/de/Produkte/Titanium-Heater~p3831	Titanium element, rated contactor, RCD, guarded mount, manual isolation, independent over-temperature cut-out	Corrosion-resistant construction suits aquaculture. PLC control uses conservative hysteresis, while the independent cut-out remains the final safety layer.
AQUAEL UNI PUMP 1500	Actuator	Tank recirculation and filtration line	Water circulation	1400 L/h; 19 W; maximum head 1.55 m; 220–240 VAC; IPX8; submerged or inline. (AQUAEL, n.d.) https://www.aquael.com/us/products/aquaristics-us/pumps-circulators-us/unipump/	Pump, strainer, check valve, service bypass, RCD, overload protection, rated contactor	Low-power continuous circulation supports filtration. Flow feedback detects loss of prime, blockage or pump failure.
Bürkert Type 6213 EV Normally Closed Valve, 24 VDC	Actuator	Tank inlet and drain lines	Water flow state	Two-way servo-assisted diaphragm valve; normally closed; 24 VDC option; water service; IP65 with suitable plug. (Bürkert, n.d.) https://www.burkert.com/en/products/solenoid-valves/general-purpose-2-2-solenoids/270895	Two valves per tank, selected DN/pressure variant, coil suppression, manual isolation, upstream strainer	Normally closed action fails safe on power loss. Paired with level and flow feedback, it enables bounded partial water exchange.
FIAP Electronic Feeder 10 kg with Spreader (1586-1)	Actuator / device	Feed supplied to turtles in each zone	Feeding time and estimated portion	10 kg hopper; 12 VDC; non-clogging screw; adjustable 2–12 m spread radius. (FIAP, n.d.) https://www.fiap.com/elektronikfuetterer-10-kg-mit-streuer.html	Hopper, screw and spreader, isolated enable relay, guarded chute, feed-level sensor, catch-test calibration	Commercial feeder reduces manual dosing. Runtime-to-mass calibration and hopper feedback provide a practical, auditable portion estimate.
Reolink RLC-811A	Sensor	Turtle activity, feeding and nesting areas	Video and event evidence	8 MP at 25 fps; H.264/H.265; 5× optical zoom; RTSP/HTTPS; IEEE 802.3af PoE; <12 W; IP67. (Reolink, n.d.) https://support.reolink.com/c/rlc-811a/	Image sensor, lens, processor, Ethernet/PoE interface, mount, privacy mask, local microSD fallback	Wired PoE avoids local adapters. Standard streams support local activity and nesting inference without continuous cloud video upload.

3 Task 3: IoT Network Technology

The completed network-only worksheet is embedded below. The responses justify the field and plant technologies against range, power, data rate, latency, security, reliability and cost. The selected architecture uses industrial current loops, RS-485/Modbus RTU, pulse/UART, isolated 24 V control, managed Gigabit Ethernet/PoE and Ethernet-primary/LTE-failover WAN. The RS-485 and Ethernet limits are treated as engineering design constraints, not as a reason to put control-critical traffic on Wi-Fi (Modbus Organization, 2006; Teltonika Networks, n.d.; TP-Link, n.d.).

IoT devices, gateways, routers, etc. to connect	Main considerations	Specific questions	Responses
20 tank instrument sets; 4 × Arduino Opta RS485 controllers with A0602/D1608 I/O; 20 Reolink RLC-811A PoE cameras; TP-Link TL-SG3428XMP managed PoE+ switch; AAEON BOXER-8653AI edge computer; Teltonika RUTX11 router.	*Determine the connectivity between selected IoT devices, gateways, routers, etc.*	*Why do selected devices need to be connected with each other and to the network?*	Connectivity closes three loops: probes provide feedback to local control; controllers and cameras provide farm-wide context to the edge computer; selected events reach cloud users. It enables unit-specific alarms, verification of actuator outcomes, cross-unit comparison, nesting evidence and maintenance diagnostics. Safety interlocks remain in each Opta, so network loss reduces visibility rather than basic control.
	Determine communication and network technologies required to support connectivity	*What are the range and coverage requirements?*	Four RS-485 trunks each serve five nearby tanks and are deliberately kept below 100 m in a linear, terminated bus. Modbus guidance supports multidrop RS-485 and up to 32 unit loads per segment (Modbus Organization, 2006). Cat6 links from PLCs, cameras, edge computer and router remain within the 100 m copper-Ethernet channel limit. The control path does not depend on Wi-Fi coverage.
		What are the power consumption constraints?	Mains is available, so continuity and protection matter more than battery life. A protected 24 VDC supply powers probes, PLCs and valves; PoE+ powers cameras; separate AC circuits feed heaters and pumps. A UPS supports PLCs, switch, edge computer and router for alarm delivery, buffering and orderly shutdown. Contactors, RCDs and manual isolation protect high-current loads.
		What is the required data rate (how much data needs to be transmitted over time)?	Minute telemetry and state changes remain below 0.1 Mbit/s. Cameras dominate: 20 H.265 streams at about 4–8 Mbit/s each produce 80–160 Mbit/s aggregate. A gigabit backbone provides headroom. The edge analyses lower-rate substreams, keeps main streams local and uploads only selected event clips.
		What are the latency requirements (how fast does data need to be transmitted)?	PLC interlocks and heater/valve decisions target sub-second local response. Local alarms and dashboard state should update within about 5 s. Cloud reports tolerate seconds to minutes. No safety action waits for a cloud round trip; cloud commands are authenticated requests that the edge and PLC revalidate against local limits.
		What are the security and reliability requirements?	The switch separates control, camera and management VLANs and applies ACLs, 802.1X/MAC controls and QoS. Its 24 PoE+ ports and 384 W budget cover 20 cameras with reserve (TP-Link, n.d.). Devices use unique credentials; unused services and camera P2P/UPnP are disabled; administration uses VPN. MQTT uses TLS and X.509 certificates. UPS power, watchdogs, local buffering, normally closed valves and Ethernet-primary/LTE-failover WAN improve
		What are the cost considerations?	*Wired installation and industrial probes cost more initially than hobby sensors or Wi-Fi, but reduce battery labour, interference and replacement risk in a wet fixed site. One managed PoE switch removes 20 camera power adapters. Four zone PLCs limit I/O cable length. Edge filtering avoids continuous video upload and reduces WAN, cloud-ingest and storage costs.*
		Which communication/network technologies are selected?	Field level: 4–20 mA for analogue probes; RS-485/Modbus RTU for multidrop sensors; pulse/UART for simple instruments; isolated relay/24 V control for actuators. Plant level: 1000BASE-T Cat6 and IEEE 802.3af/at PoE through a TP-Link TL-SG3428XMP (TP-Link, n.d.). WAN: Ethernet primary plus Teltonika RUTX11 dual-SIM LTE Cat 6 failover (Teltonika Networks, n.d.). Applications use local Modbus TCP/HTTPS/RTSP and outbound MQTT/TLS/HTTPS.

4 Task 4: Fog and Cloud Computing


The edge/fog and cloud continuation of the supplied connectivity template is embedded below. The Opta controllers execute local interlocks and bounded actuation; the BOXER edge node validates, correlates, buffers and analyses video; and AWS provides durable history, device identity, notifications and reporting. The cloud is therefore valuable for multi-user access and long-term analysis but is not placed in the immediate safety loop (AAEON, n.d.; Amazon Web Services, n.d.-a, n.d.-b, n.d.-c; Arduino, n.d.-b).

IoT devices and network devices (e.g., router, hub, gateway, etc.)	**Main considerations**	**Specific questions**	**Responses**
4 × Arduino Opta RS485 zone controllers; AAEON BOXER-8653AI industrial edge computer; TP-Link managed PoE+ switch; local operator web application; maintenance log/API.	*Determine the connectivity between IoT devices and network devices in the edge/fog layer*	*Is an edge/fog layer required? Why?*	Yes. Deterministic control must survive Internet loss, and 20 continuous video streams are too bandwidth-intensive and privacy-sensitive for routine cloud upload. Opta PLCs form the device edge; the BOXER is the farm fog node for protocol normalisation, quality checks, video inference, event correlation, short-term storage and store-and-forward delivery.
		Which network device(s) should handle computing across the edge/fog layer?	Each Opta executes five-tank control rules and exposes states over the isolated control VLAN. The AAEON BOXER-8653AI runs containerised acquisition, message brokering, rules, local dashboards and vision models. The managed switch and router forward and secure traffic but do not make animal-control decisions.
		What data is transmitted between the IoT devices and network device(s)?	Probes send temperature, pH, turbidity, ammonia, level, flow, feed distance and humidity with timestamps and diagnostics. PLCs add set-points, relay states, accumulated flow, manual/automatic mode, watchdog and alarm codes. Cameras send H.265 RTSP substreams and event windows. The edge adds device identity, tank/zone context and quality flags.
		What data processing and/or analysis tasks should be performed in the edge/fog layer?	PLCs scale signals, debounce pulses, check plausible ranges/rates, enforce hysteresis and time/volume bounds, and execute fail-safe control. The BOXER synchronises timestamps, detects stale or contradictory readings, aggregates summaries, correlates flow with level/valve state, infers activity/feeding/nesting candidates, queues messages during outages and retains rolling evidence locally.
		If the fog connects with a user application, what is the purpose of the connection?	On the farm LAN, authorised users see current tank status, local alarms, event video, acknowledgement state and bounded manual controls even during WAN loss. The fog node labels unsynchronised data and preserves operational visibility and intervention capability.
		If the fog connects with a system, what is the purpose of the connection?	The fog service writes an append-only operations log and exports alarms, acknowledgements, maintenance flags, calibration due dates and actuator runtime through signed CSV/API. The maintenance system can create or close work orders but cannot issue raw heater, pump or valve commands.

IoT devices and network devices (e.g., router, hub, gateway, etc.)	**Main considerations**	**Specific questions**	**Responses**
AAEON BOXER-8653AI edge computer; Teltonika RUTX11 firewall/router; AWS IoT Core, time-series/object storage and rules; role-based web application; maintenance/work-order system.	*Determine the connectivity to the cloud*	*Is a cloud layer required? Why?*	Yes, but not for immediate safety. AWS provides durable off-site history, multi-user access, fleet identity, long-term comparison, reporting and notification integration. AWS IoT Core authenticates the edge through X.509 certificates, routes MQTT messages and maintains desired/reported state through device shadows (Amazon Web Services, n.d.).
		What data should be transmitted to the cloud, and is it from IoT devices or edge/fog layer devices?	The BOXER publishes validated minute summaries, state changes, alarms, acknowledgements, health/calibration metadata and daily aggregates by MQTT/TLS. Selected event thumbnails/clips and diagnostic bundles use HTTPS object upload. Raw continuous camera streams and high-frequency samples remain on site unless an authorised investigation requests them.
		What data processing and/or analysis tasks should be performed in the cloud?	IoT rules route telemetry to time-series storage and alarms to notification workflows; object storage retains approved evidence clips. Cloud jobs calculate cross-unit baselines, growth-stage comparisons, sensor-drift indicators and feed/energy/water summaries. Device shadows retain configuration state, while audit records capture user changes and acknowledgements.
		If the cloud connects with a user application, what is the purpose of the connection?	A role-based web application provides historical charts, unit comparison, alarm notifications, evidence links, weekly reports and audit history. Users may request bounded set-point changes; the cloud records the request, but the edge/PLC rejects stale, unauthorised or out-of-range values.
		If the cloud connects with a system, what is the purpose of the connection?	The cloud exports approved maintenance tickets, calibration schedules, equipment runtime, water/feed consumption and compliance summaries through an API or scheduled CSV. Only necessary identifiers and evidence are included. Return status can close a ticket, but the external system cannot issue raw actuator commands.

5 Task 5: Overall Solution Connectivity

5.1 Graphical representation

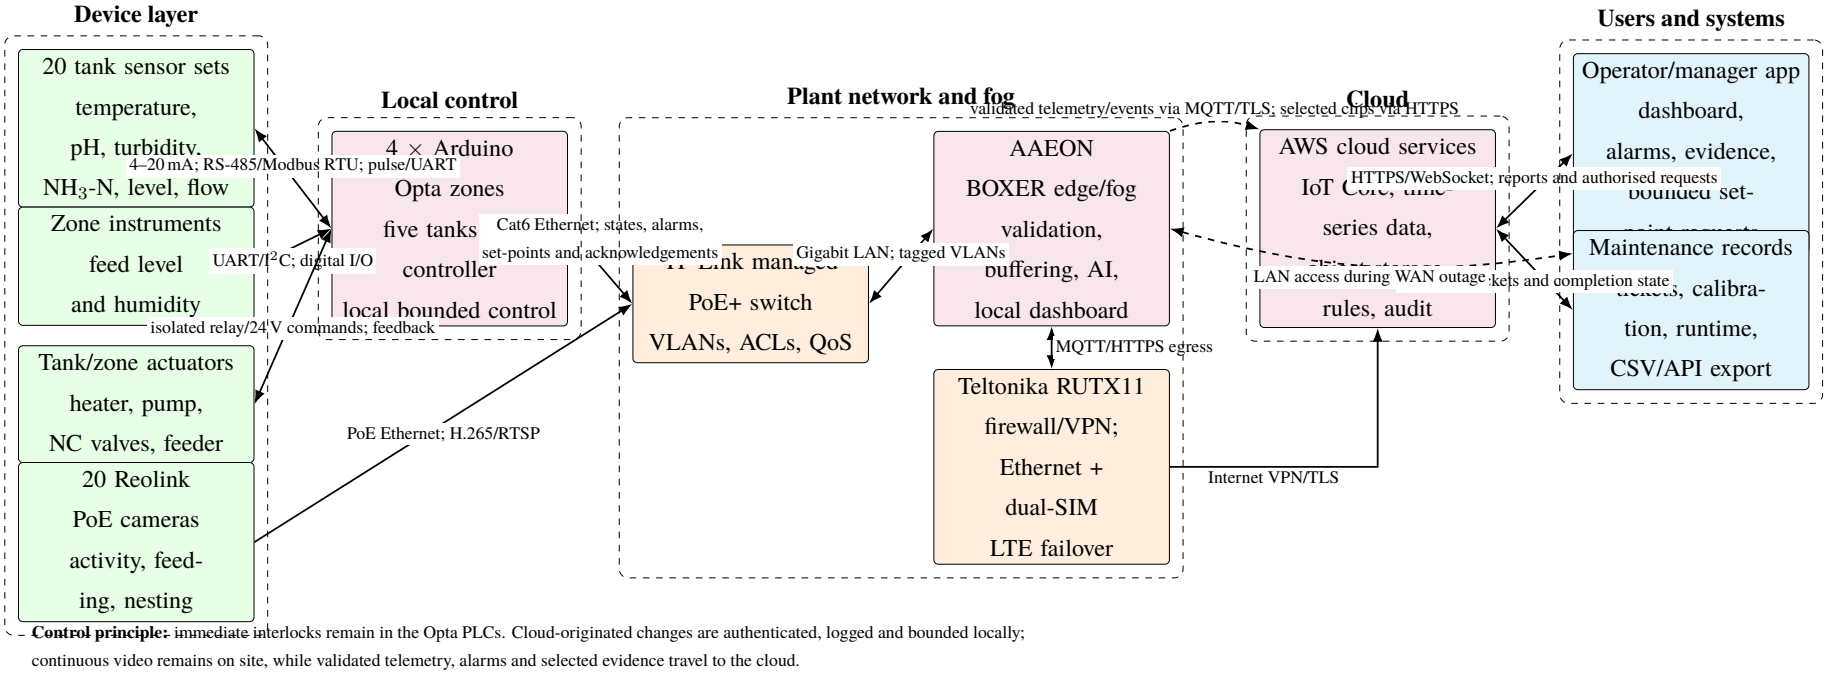

Control principle: immediate interlocks remain in the Opta PLCs. Cloud-originated changes are authenticated, logged and bounded locally; continuous video remains on site, while validated telemetry, alarms and selected evidence travel to the cloud.

Figure 1: End-to-end STBS connectivity, processing locations and data flows.

5.2 Description of the diagram

Figure 1 separates safety control from analytics and reporting. Tank probes and actuator feedback terminate at four Opta PLCs, each responsible for five units. The PLCs execute bounded control locally and exchange states over the control VLAN. Twenty PoE cameras and the PLC uplinks reach a managed switch; the BOXER edge computer consumes separated streams, validates telemetry, runs video inference and buffers outages. The router exposes no field device directly and supplies secure primary-Ethernet/dual-SIM WAN service. The edge publishes validated summaries and events by MQTT/TLS and uploads only selected clips by HTTPS. AWS stores history, routes alarms and serves authenticated dashboards and maintenance exports. Users may acknowledge alarms or propose set-points, but every downward request is logged and revalidated at the edge and PLC. During Internet loss, local control, event storage and the LAN dashboard continue.

Word count: 128.

6 Task 6: Conclusion

The design fulfils the A1a plan by linking continuous water and feed measurements, bounded actuation, video evidence and role-specific alerts across 20 units. Industrial wired probes and zone PLCs improve repeatability and keep essential temperature, circulation and water-exchange rules independent of Internet availability. Edge processing contains video bandwidth, correlates commands with level/flow feedback and preserves a local operating view; cloud services add durable history, comparison, notification and maintenance reporting. The main limitations are probe fouling and calibration effort, the capital and installation cost of industrial sensors and protected wiring, and the need to train and validate vision models under changing light, water and turtle density. Ammonia and video inference are indicators rather than diagnoses, while feeder runtime only estimates delivered mass. A staged pilot on two units should validate thresholds, hydraulic timings, false-alarm rates, model performance and operating procedures before all 20 units are commissioned.

Word count: 139.

References

AAEON. (n.d.). *Boxer-8653ai: Fanless embedded ai system with nvidia jetson orin nx*. Retrieved October 21, 2026, from https://www.aaeon.com/en/product/detail/ai-edge-solutions-boxer-8653ai/specification

Amazon Web Services. (n.d.-a). *Aws iot device shadow service*. Retrieved October 21, 2026, from https://docs.aws.amazon.com/iot/latest/developerguide/iot-device-shadows.html

Amazon Web Services. (n.d.-b). *Device communication protocols*. Retrieved October 21, 2026, from https://docs.aws.amazon.com/iot/latest/developerguide/protocols.html

Amazon Web Services. (n.d.-c). *How aws iot works*. Retrieved October 21, 2026, from https://docs.aws.amazon.com/iot/latest/developerguide/aws-iot-how-it-works.html

Aqua Medic. (n.d.). *Titanium heater*. Retrieved October 21, 2026, from https://www.aqua-medic.de/de/Produkte/Titanium-Heater~p3831

AQUAEL. (n.d.). *Uni pump*. Retrieved October 21, 2026, from https://www.aquael.com/us/products/aquaristics-us/pumps-circulators-us/unipump/

Arduino. (n.d.-a). *Arduino opta ext a0602*. Retrieved October 21, 2026, from https://store.arduino.cc/products/opta-ext-a0602

Arduino. (n.d.-b). *Opta micro plc*. Retrieved October 21, 2026, from https://docs.arduino.cc/hardware/opta

Atlas Scientific. (n.d.-a). *Ezo humidity probe*. Retrieved October 21, 2026, from https://atlas-scientific.com/probes/humidity-probe/

Atlas Scientific. (n.d.-b). *Industrial dissolved oxygen kit*. Retrieved October 21, 2026, from https://atlas-scientific.com/kits/industrial-dissolved-oxygen-kit/

Atlas Scientific. (n.d.-c). *Industrial dissolved oxygen transmitter*. Retrieved October 21, 2026, from https://atlas-scientific.com/transmitters/ixian-dissolved-oxygen-transmitter/

Atlas Scientific. (n.d.-d). *Industrial ph kit*. Retrieved October 21, 2026, from https://atlas-scientific.com/kits/industrial-ph-kit/

Atlas Scientific. (n.d.-e). *Industrial ph probe*. Retrieved October 21, 2026, from https://atlas-scientific.com/industrial/industrial-ph-probe/

Atlas Scientific. (n.d.-f). *Industrial pt-1000 temperature probe*. Retrieved October 21, 2026, from https://atlas-scientific.com/industrial/industrial-pt-1000-temperature-probe/

Atlas Scientific. (n.d.-g). *Industrial rtd temperature transmitter*. Retrieved October 21, 2026, from https://atlas-scientific.com/transmitters/rtd-temperature-transmitter/

Bürkert. (n.d.-a). *Type 6213 ev solenoid valve*. Retrieved October 21, 2026, from https://www.burkert.com/en/products/solenoid-valves/general-purpose-2-2-solenoids/270895

Bürkert. (n.d.-b). *Types 6213 ev and 6281 ev operating instructions*. Retrieved October 21, 2026, from https://www.burkert.com/en/Media/plm/MAN/MA/man_a_ma_6213-6281_en-gb.pdf

DFRobot. (n.d.-a). *A02yyuw waterproof ultrasonic sensor (sen0311)*. Retrieved October 21, 2026, from https://www.dfrobot.com/product-1935.html

DFRobot. (n.d.-b). *Industrial rs485 ammonia nitrogen and ph sensor (sen0711)*. Retrieved October 21, 2026, from https://www.dfrobot.com/product-3107.html

DFRobot. (n.d.-c). *Industrial rs485 turbidity sensor (sen0710)*. Retrieved October 21, 2026, from https://www.dfrobot.com/product-3104.html

DFRobot. (n.d.-d). *Selection guide of liquid level sensors*. Retrieved October 21, 2026, from https://www.dfrobot.com/blog-1138.html

DFRobot. (n.d.-e). *Throw-in type liquid level transmitter (kit0139)*. Retrieved October 21, 2026, from https://www.dfrobot.com/product-1863.html

DFRobot. (n.d.-f). *Water flow sensor (sen0217)*. Retrieved October 21, 2026, from https://www.dfrobot.com/product-1517.html

FIAP. (n.d.). *Electronic feeder 10 kg with spreader*. Retrieved October 21, 2026, from https://www.fiap.com/elektronikfuetterer-10-kg-mit-streuer.html

Modbus Organization. (2006). *Modbus over serial line specification and implementation guide v1.02*. Retrieved October 21, 2026, from https://www.modbus.org/docs/Modbus_over_serial_line_V1_02.pdf

Munyaev, A., Jiang, B.-L., & Huang, I.-J. (2026). Smart turtle farm: Soft-shell turtle nesting behavior recognition and monitoring system. *Computers and Electronics in Agriculture*, *244*, 111477. https://doi.org/10.1016/j.compag.2026.111477

Prapti, D. R., Mohamed Shariff, M., Che Man, H., Ramli, N. M., & Perumal, T. (2022). Internet of things (iot)-based aquaculture: An overview of iot application on water quality monitoring. *Reviews in Aquaculture*, *14*(2), 979–992. https://doi.org/10.1111/raq.12637

Rastegari, H., Nadi, F., Lam, S. S., & Ikram, M. (2023). Internet of things in aquaculture: A review of the challenges and potential solutions based on current and future trends. *Smart Agricultural Technology*, *4*, 100187. https://doi.org/10.1016/j.atech.2023.100187

Reolink. (n.d.). *Rlc-811a specifications*. Retrieved October 21, 2026, from https://support.reolink.com/c/rlc-811a/

Teltonika Networks. (n.d.). *Rutx11 industrial cellular router*. Retrieved October 21, 2026, from https://www.teltonika-networks.com/products/routers/rutx11

TP-Link. (n.d.). *Tl-sg3428xmp jetstream 24-port gigabit l2+ managed switch*. Retrieved October 21, 2026, from https://www.tp-link.com/sg/business-networking/managed-switch/tl-sg3428xmp/v1/