

Balancing a wheeled inverted pendulum

This problem is still work in progress.

Consider the wheeled inverted pendulum depicted in Figure 1:

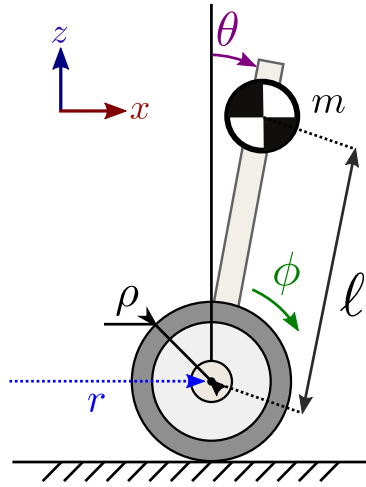


Figure 1: Wheeled inverted pendulum model.

Its equation of motion is:

$$\ell \ddot{\theta} = g \sin(\theta) - \ddot{r} \cos(\theta)$$

The wheel motor is commanded in wheel acceleration $\ddot{\phi}$, which is proportional to the ground acceleration $\ddot{r} = \rho \ddot{\phi}$. We therefore choose our control input as:

$$u = \ddot{r}$$

One way to characterize whether the robot “can balance” from a state is viability: a state $x(0) = [\theta \ r \ \dot{\theta} \ \dot{r}]$ of the robot is said to be *viable* if and only if there exists control inputs $u(t)$ such that, integrating the equation of motion above, there exists a future time $T \geq 0$ where the robot is back at its reference position $x(T) = x_{\text{ref}} = [0 \ 0 \ 0 \ 0]$.

Question 1

In this question, the system starts from an initial state $x(0) = [\theta_1 \ 0 \ 0 \ 0]$. The wheel motor has a maximum acceleration yielding a control input constraint $u \leq a_{\text{max}}$. What is the maximum initial

angle $\theta_{i,\max}$ from which the robot can balance?

- Remember that, if x_{ref} is accessible from $x(0)$, then there exists a minimum-time trajectory from $x(0)$ to x_{ref} [1].
- We will admit that time-optimal solutions for this system are bang-bang, *i.e.*, $\forall t, u(t) = \pm a_{\max}$.

References

- [1] Theorem 3.1.1 in *Contrôle optimal: théorie & applications*, E. Trélat, 2005.