
TECHNICAL SPECIFICATIONS

NUCLEAR DATA INC.
100 West Golf Road
Palatine, Illinois 60067
Phone A.C. 312 • 529-4600

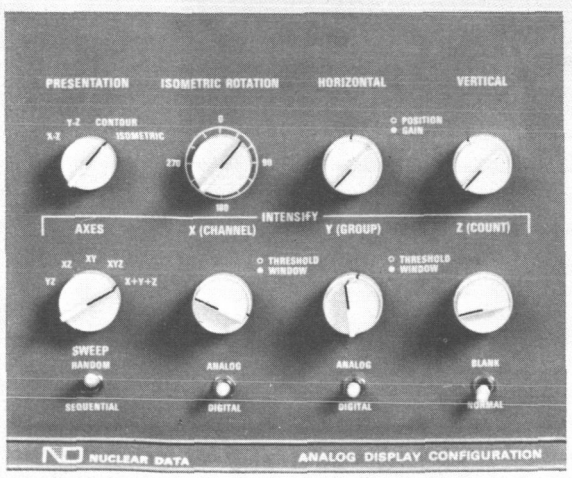

SERIES 3300 ANALOG DISPLAY CONFIGURATION

The Analog Display Configuration Module provides an exceptional degree of data-viewing versatility. It also provides a totally new display generation technique which resolves the problem of presenting large numbers of storage channels (words) at one time with a minimum of flicker effect. This is accomplished by means of unique quasi-random address selection circuitry.

Three basic methods of display can be selected: slice, with counts proportional to degree of vertical point displacement as a function of either of two input parameters; isometric, with counts proportional to degree of vertical point displacement as a function of two input parameters; and contour, with displacement a function of two input parameters. Either logarithmic or linear point displacement and point intensification can be selected for all display methods except the Z axis in logarithmic. In addition, decade calibration points can be superimposed on the logarithmic slice and isometric displays to aid in count level determination.

A feature which is especially useful in isometric display is a facility for rotating the analog presentation through 360° about its axis of symmetry. This makes it possible to observe energy relationships which may not be visible at some viewing angles.

During static display, data can be presented by high speed sequential scanning or by the quasi-random selection technique, as determined by a front panel control. During accumulation, even at extremely low counting rates, the viewing of data is greatly enhanced by the quasi-random technique.

Types of Display

The following types of display can be selected:

XZ — When SINGLE or MULTI submode operation has been chosen, display points are displaced vertically in linear or logarithmic relationship to the arithmetic data stored in each channel.

YZ — When MULTI submode operation has been chosen, each display point is displaced vertically in linear or logarithmic relationship to the arithmetic data stored in all channels of successive Y-axis slices.

CONTOUR — When MULTI submode operation has been chosen, display points represent the coordinate intersection of the X parameter (relative channel within a group) and the Y parameter (memory groups). Controllable count level discrimination provides selective blanking of displayed data points.

ISOMETRIC — Graduated displacement of horizontal display axes (relative channels within a group) and vertical display axes (memory groups) with data points displaced vertically in linear or logarithmic relationship to the arithmetic data stored in each absolute channel.

Isometric Display Rotation

The Isometric Display can be rotated 360° about its axis of symmetry in graduated steps of 15° to facilitate interpretation of two parameter data.

Display Position & Gain Control

Vertical and horizontal gain and position control is provided.

Region of Interest Intensification

A region of interest can be intensified by analog or digital selection for either closer examination or readout purposes.

X-Y-Z Analog Intensification Generators

Circuitry is included for analog selection and generation of area intensification.

Display & Analog Readout Amplifiers

Operational amplifiers for generation of analog deflection signals are included.

Post Voltage Regulators

Additional voltage regulation for analog display and readout circuitry is included to provide high stability and clarity in analog presentation.

Printed in U.S.A. 3/67