



1)

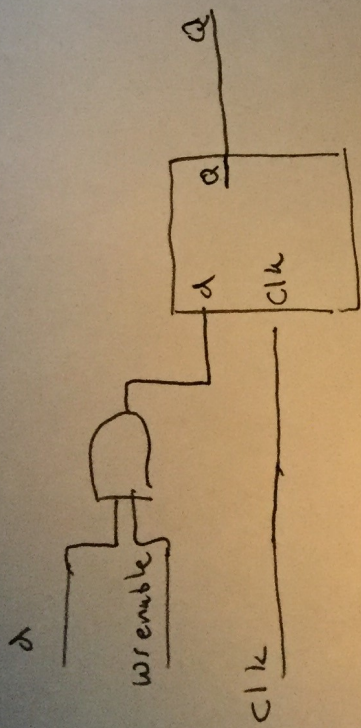

vs

1)

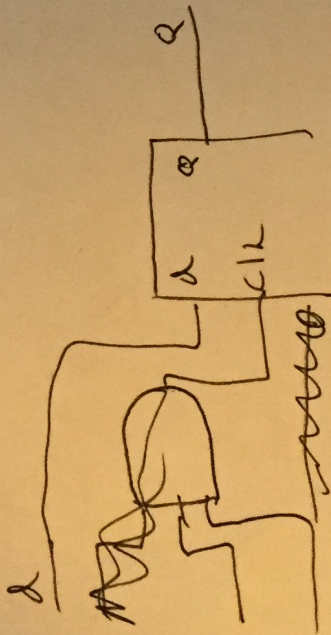

2)

left shift by the address amount, which puts a enable flag at the address bit by shifting in address number of bits