


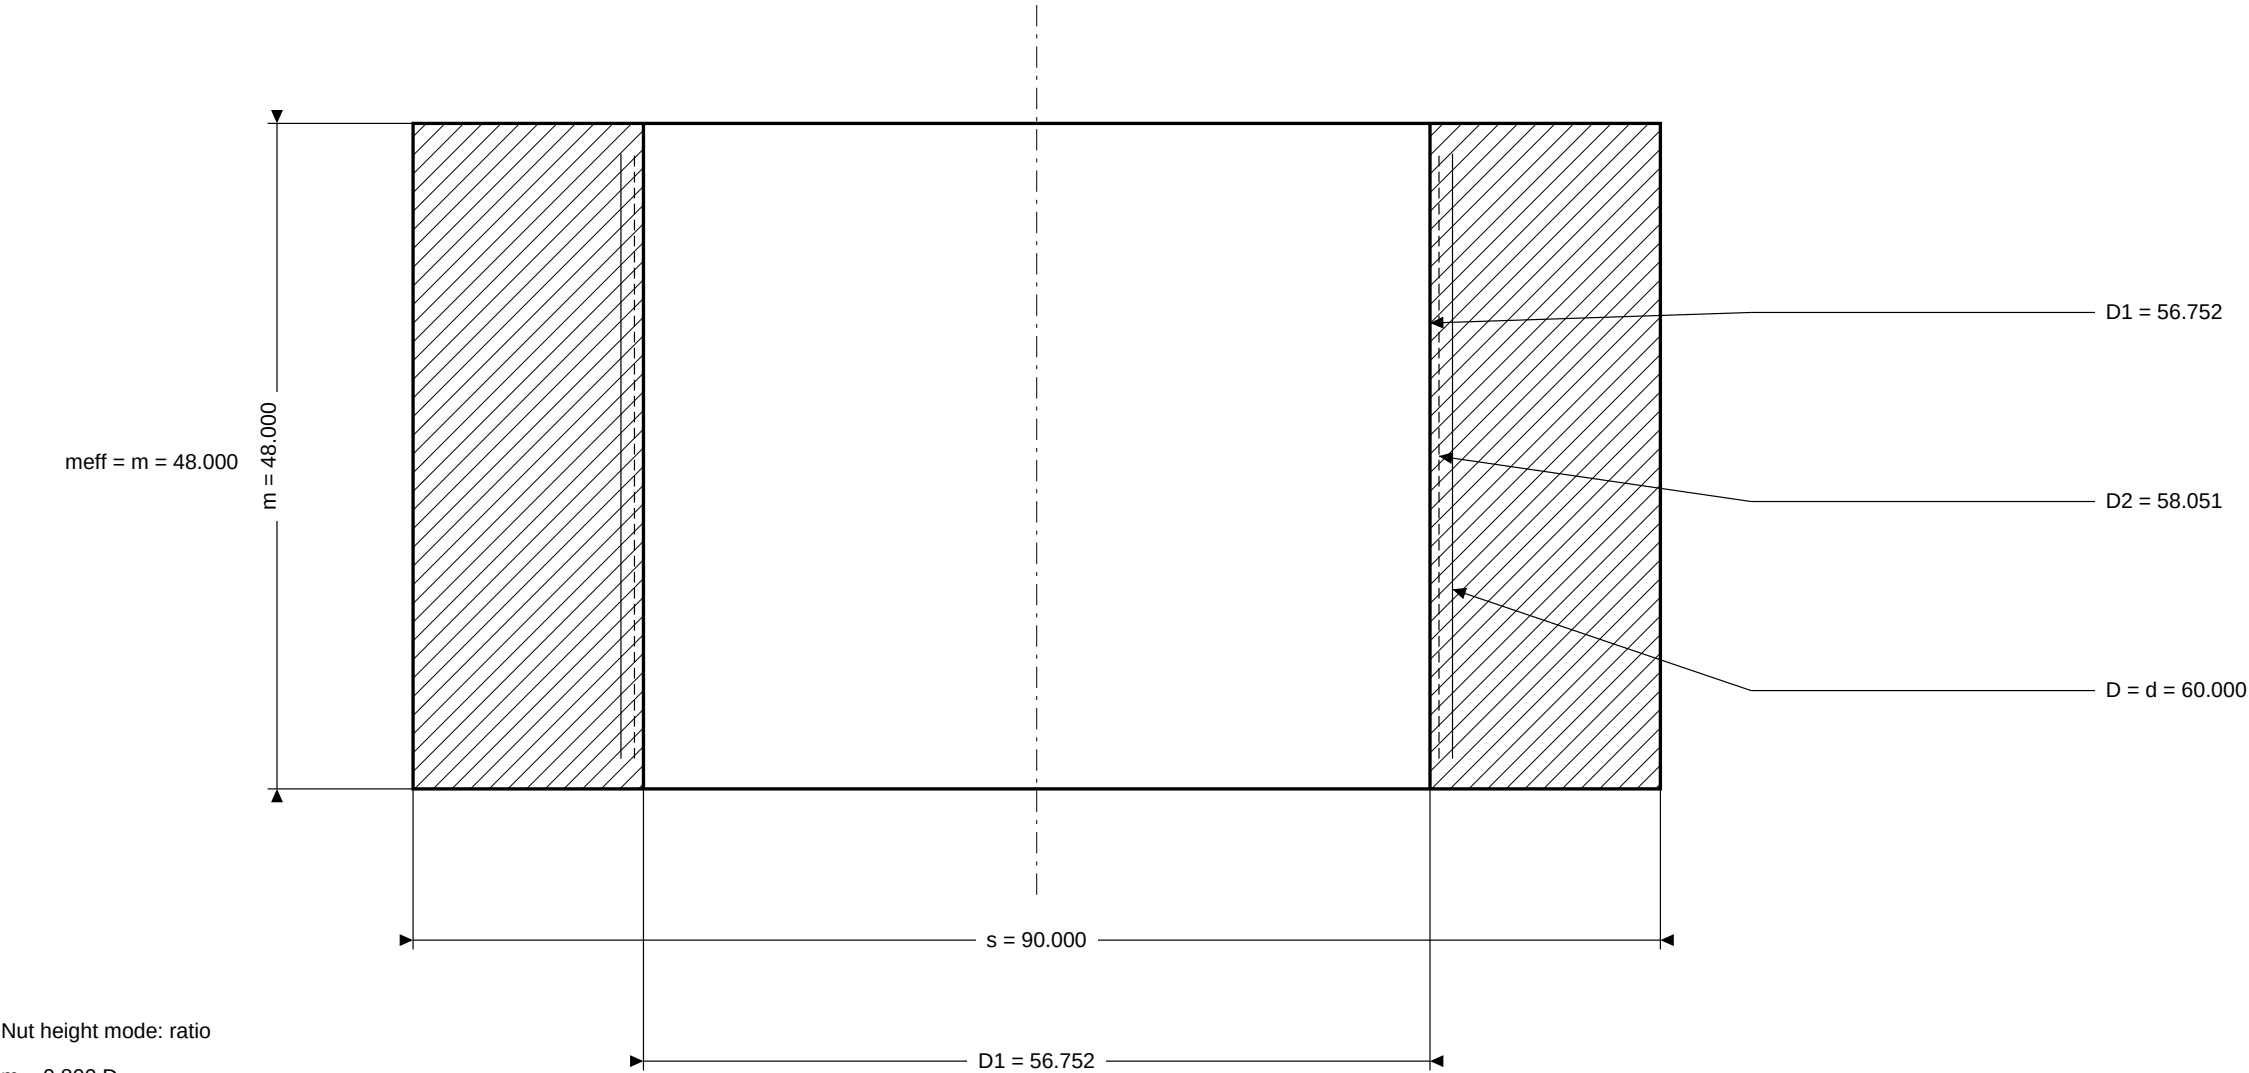


Nut height mode: ratio
 $m = 0.800 D$
Internal thread: crest thick line, root thin line; D2 dashed as reference.

ISO/TR 16224 PARAMETRIC DRAWING	SCALE: NTS
CASE: M60x3_demo	SHEET 1/2


INTERNAL THREAD - REFERENCE / CONSTRUCTION LINES

Displayed flank angle = user input alpha = 60.000 deg.

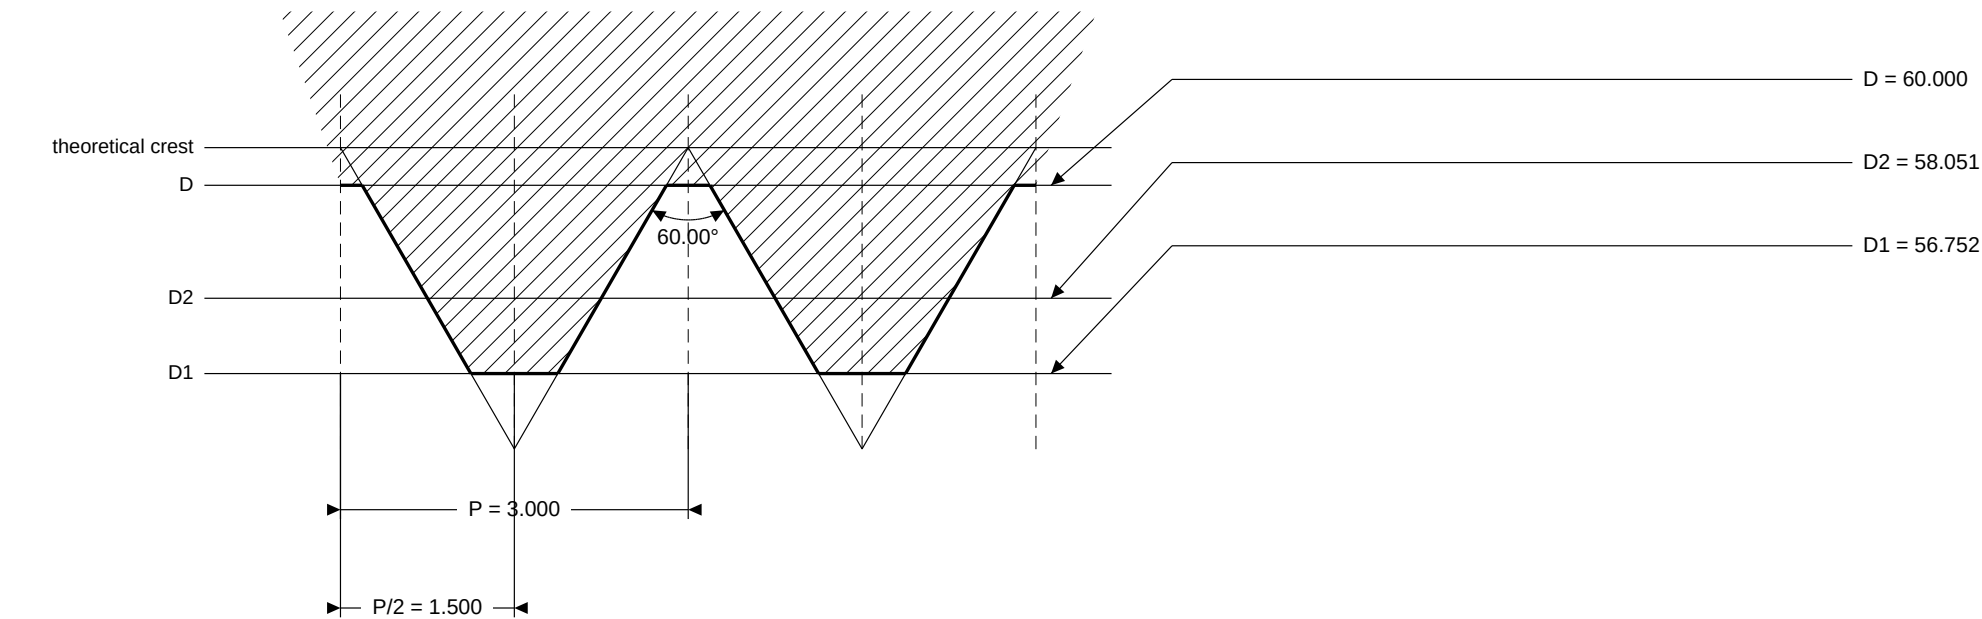

EXTERNAL THREAD - TRUE TANGENT ROOT FILLET

Root arc tangent to both flanks; alpha=60.000 deg, rho=0.43301 mm.

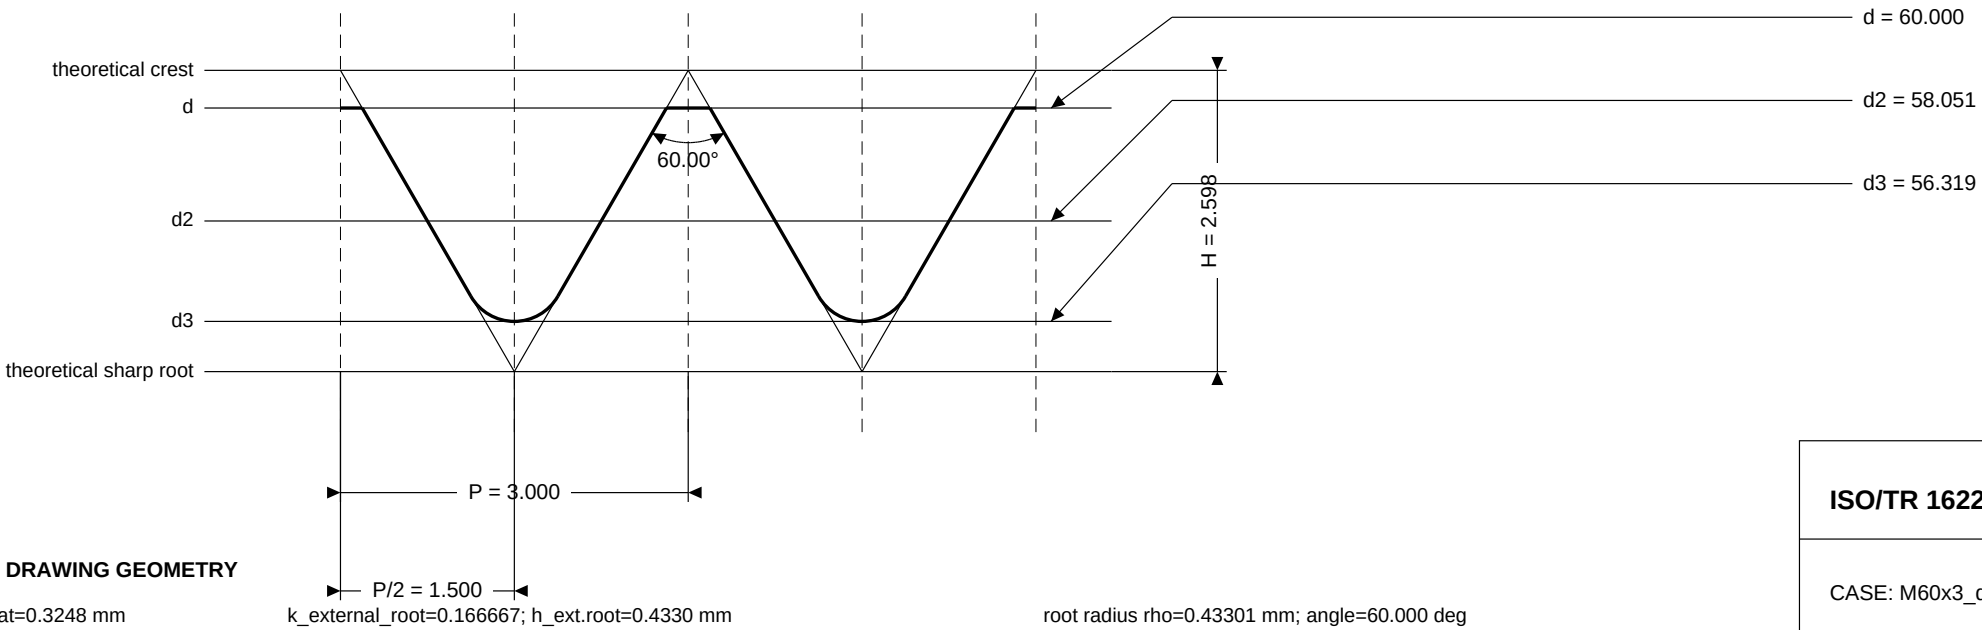

PROFILE INPUTS / DRAWING GEOMETRY

k_flat=0.125000; h_flat=0.3248 mm

k_external_root=0.166667; h_ext.root=0.4330 mm

root radius rho=0.43301 mm; angle=60.000 deg

ISO/TR 16224 PARAMETRIC DRAWING	SCALE: NTS
CASE: M60x3_demo	SHEET 2/2