microduck-trunk-base SCALE 5:1 A1 THIRD ANGLE

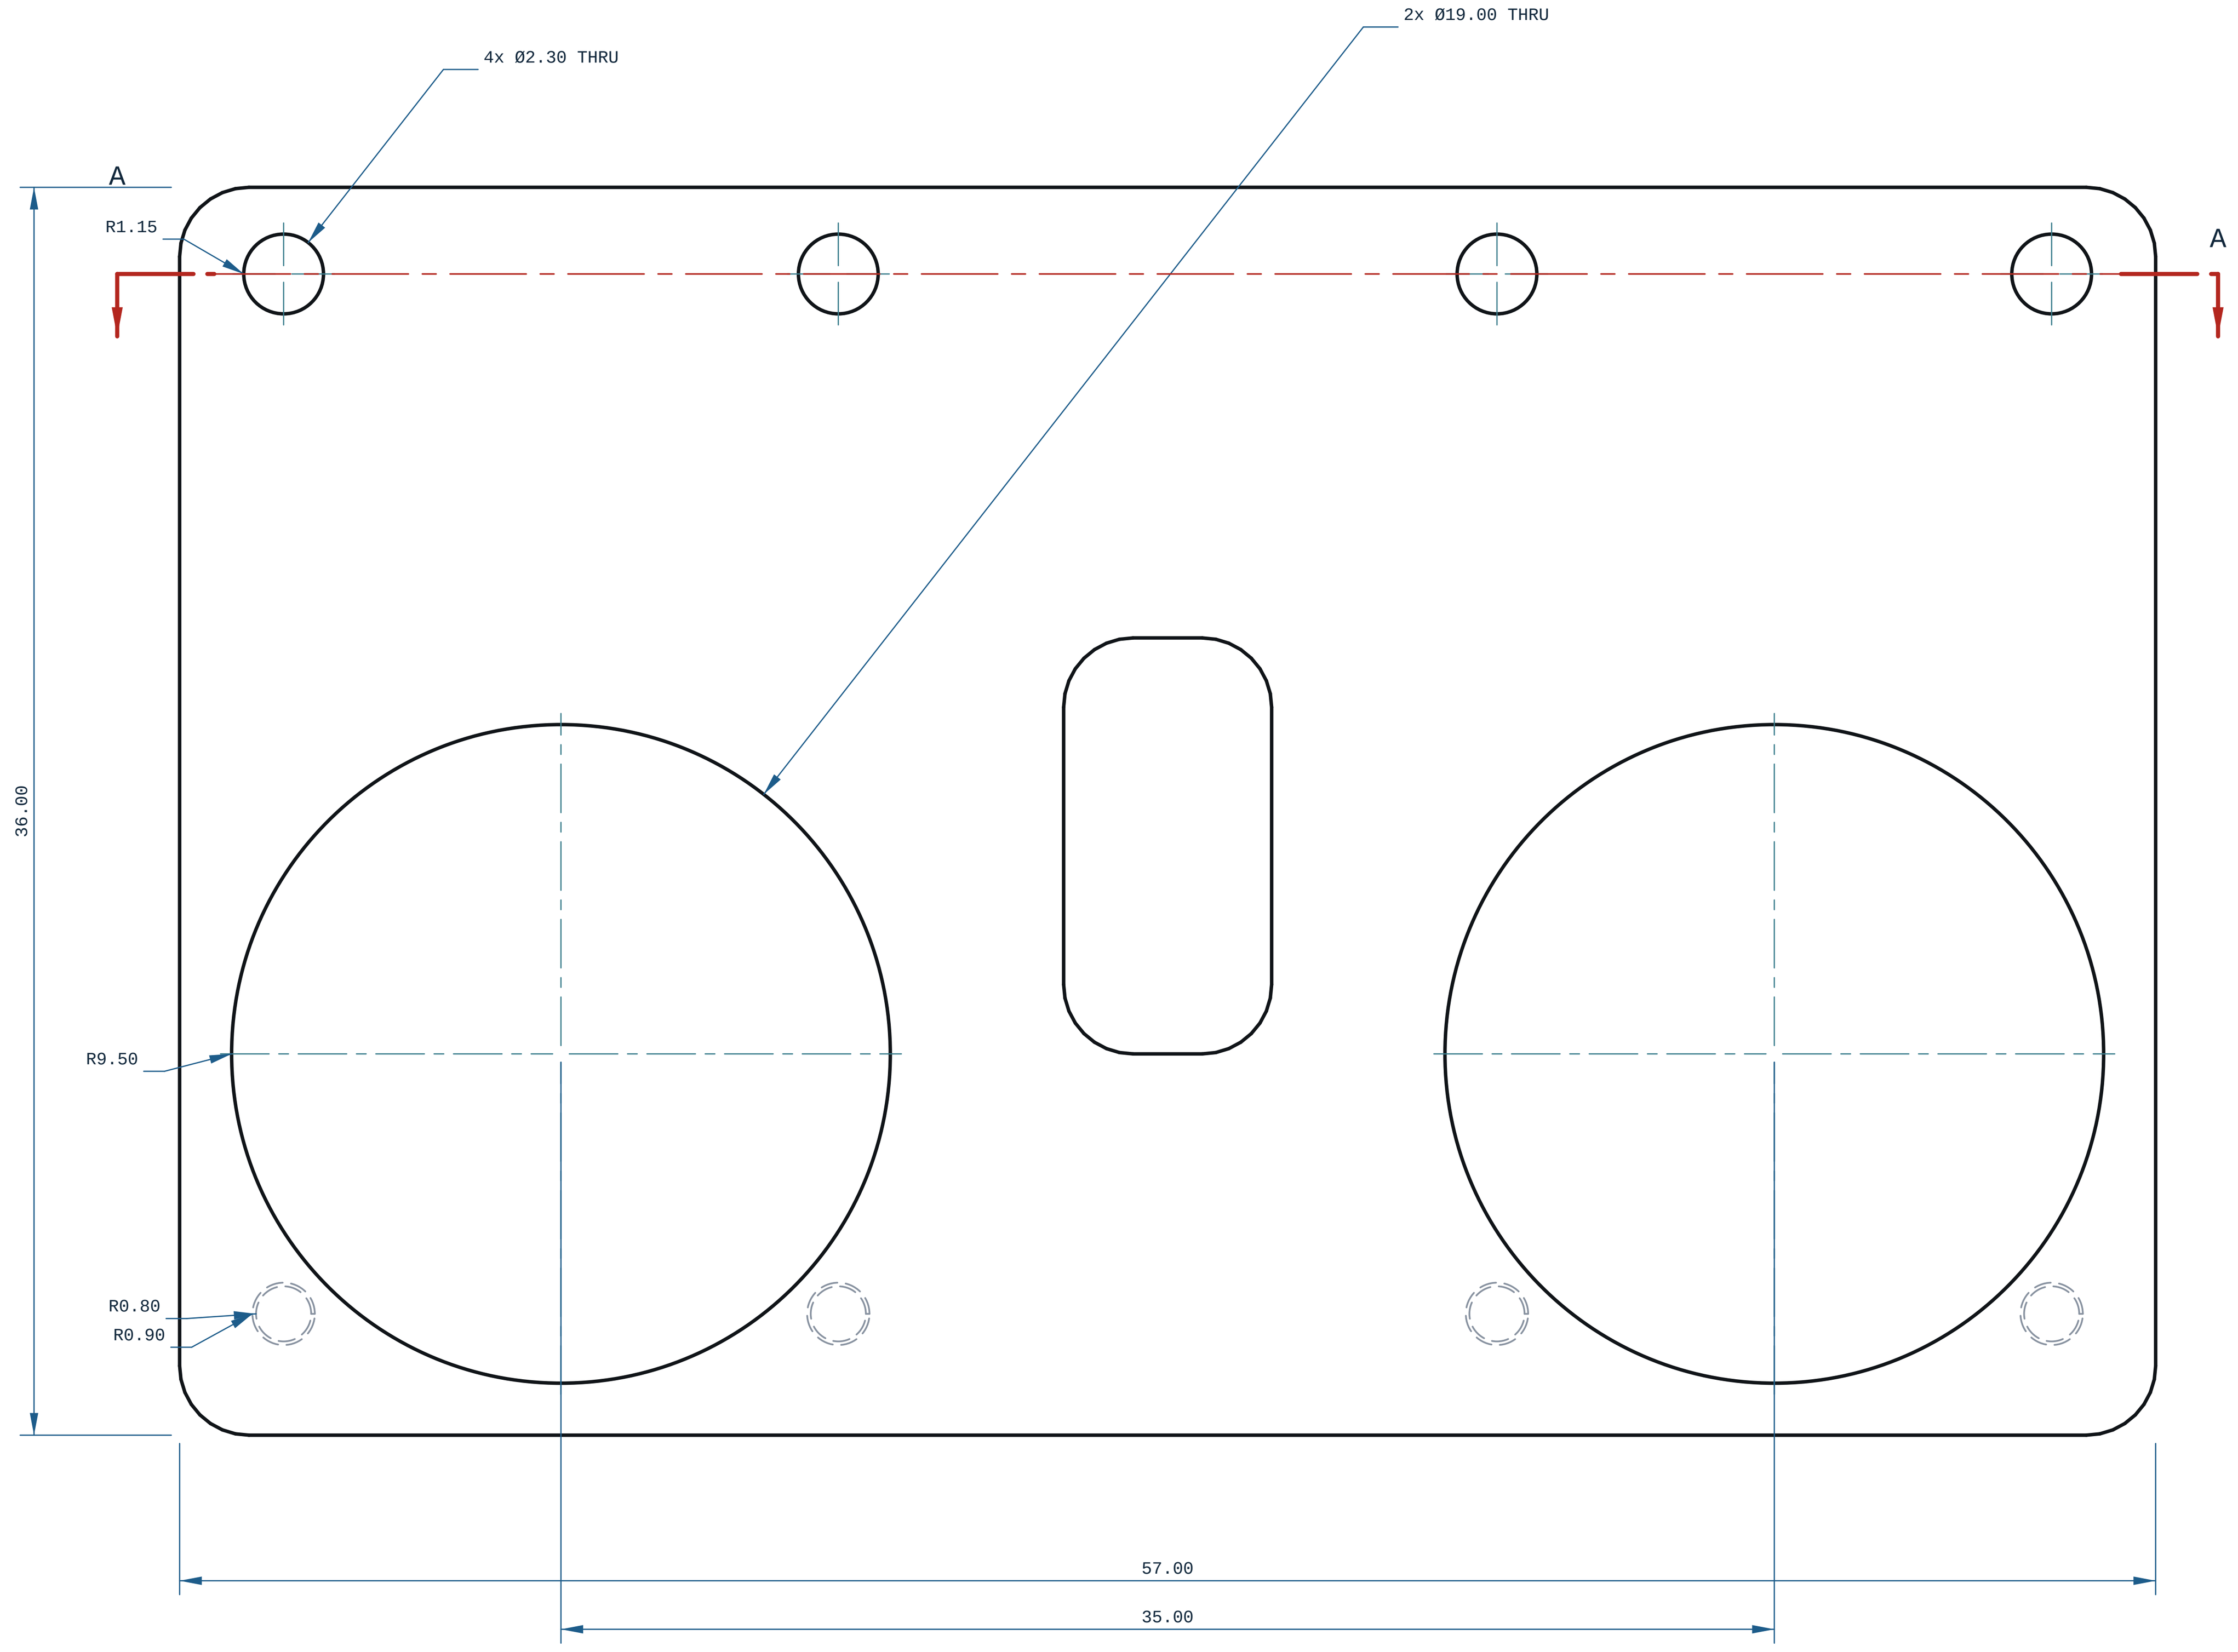

TOP VIEW

X ? Y ?

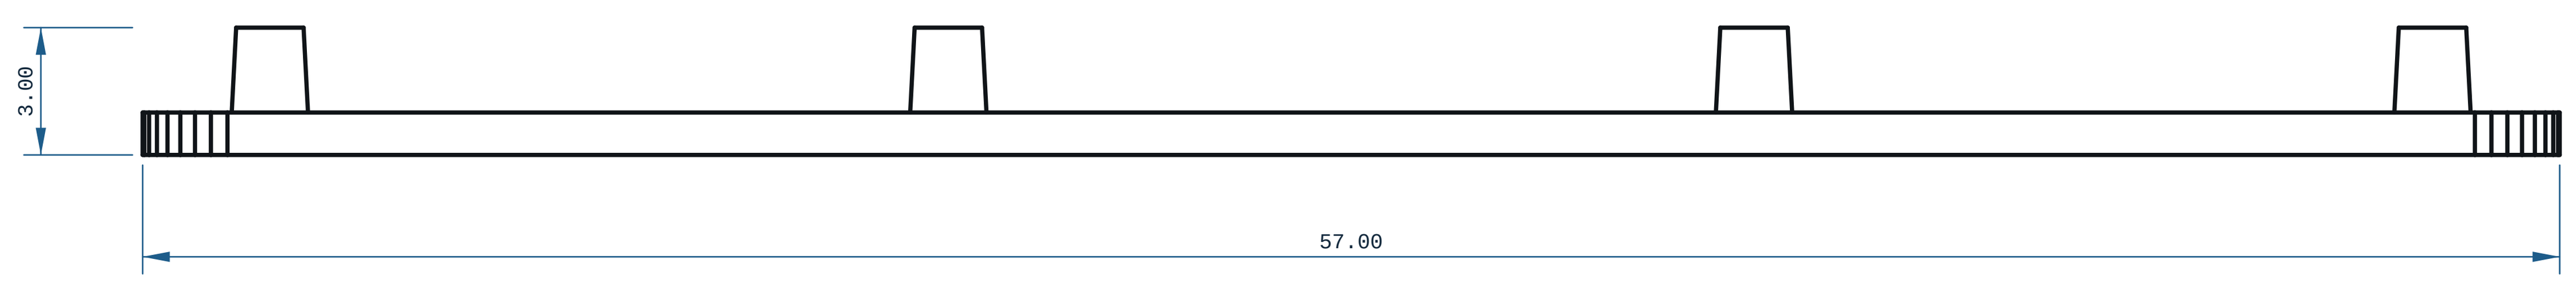

FRONT VIEW

-X ? Z ?

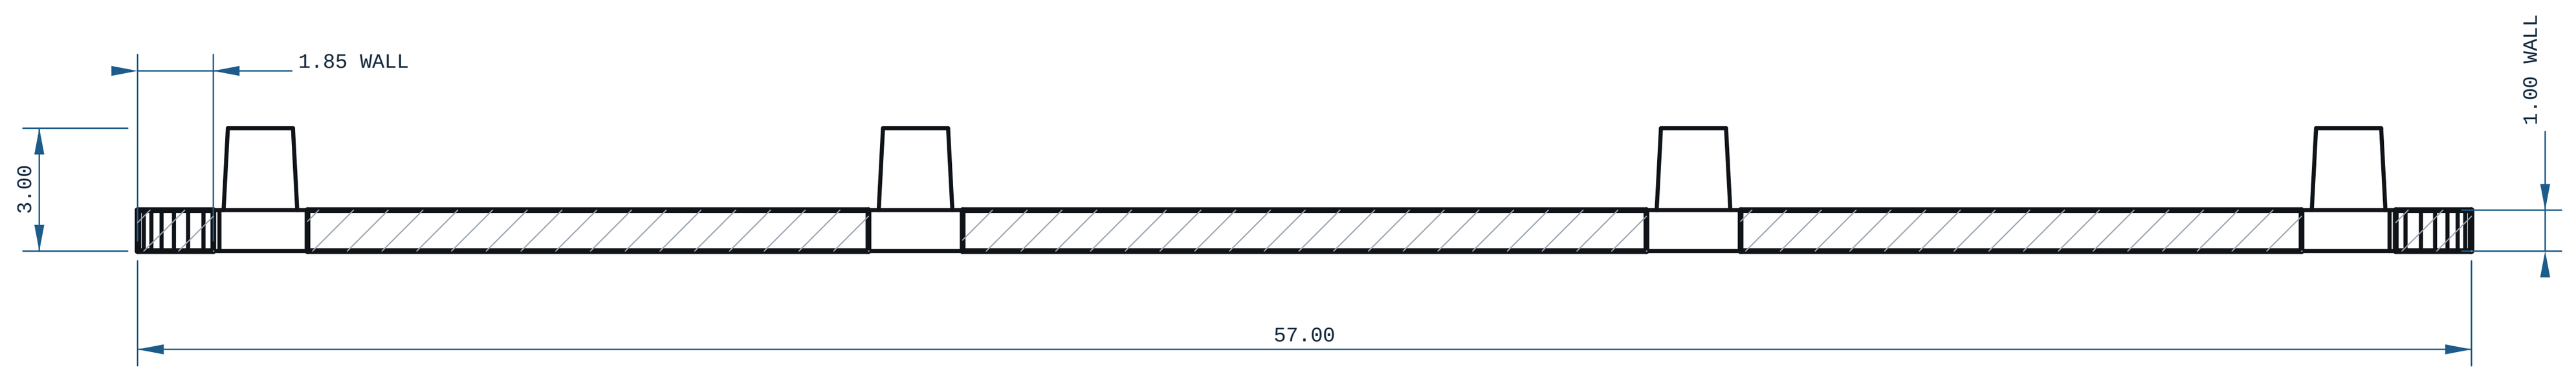

SECTION A-A

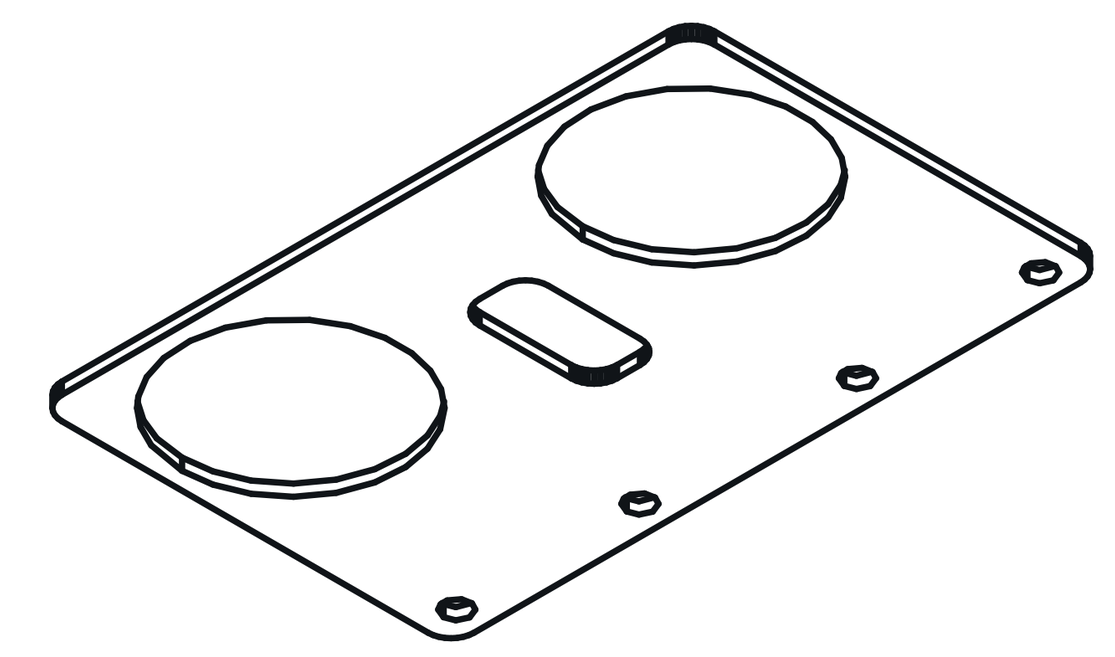

ISOMETRIC VIEW

57.00 x 36.00 x 3.00 mm

REFERENCE RENDER (ISO2) ? rendered off this solid, 900 x 680 px

HOLE TABLE ? 6 POSITIONS

TAG	SIZE	X	Y	C'BORE
A1	Ø2.30 THRU	-25.50	20.50	-
A2	Ø2.30 THRU	-9.50	20.50	-
A3	Ø2.30 THRU	9.50	20.50	-
A4	Ø2.30 THRU	25.50	20.50	-
A5	Ø19.00 THRU	-17.50	-2.00	-
A6	Ø19.00 THRU	17.50	-2.00	-

every row measured off the solid; positions are model coordinates, mm. C'BORE side is the face it opens on.

NOTES

1. ALL DIMENSIONS IN mm AND DEGREES. EVERY DIMENSION AND EVERY HOLE CALLOUT WAS MEASURED OFF THE SOLID.
2. PROCESS: FDM.
3. THINNEST WALL, WHOLE SOLID: 1.0000 mm, AT X=-27.402 Y=-6.099 Z=16.500 ? MEASURED OVER THE WHOLE SOLID BY RAY+EXACT AT 1.409 mm SAMPLE SPACING (A FEATURE NARROWER THAN THAT CAN BE MISSED). A RAY MINIMUM AT AN EDGE, A FILLET RUN-OUT OR A CHAMFER TIP IS A REAL DISTANCE THROUGH MATERIAL AND IS NOT A PRINTABLE WALL.
4. GENERAL TOLERANCE CANNOT DETERMINE ? SEE PRINT / DFM NOTES UNLESS STATED.
5. SECTION A-A AT Y=20.50: THINNEST MATERIAL IN THIS PLANE ONLY 1.00 mm, AT X=-28.02, Z=17.00 ? A SCAN OF ONE CUT, NOT THE PART MINIMUM.
6. TOP VIEW: hidden lines KEPT: without them 36 of 690 edge samples have no ink within 0.35 mm (worst 2.342 mm) and the feature would be missing from the sheet.
7. FRONT VIEW: hidden lines SUPPRESSED: all 658 edge samples still land on drawn ink without them.

PRINT / DFM

1. ORIENTATION: laid flat (57 x 36 x 3 mm)
2. THINNEST WALL: 1.00 mm (floor 0.80 mm = 2 perimeters @ 0.4 mm nozzle)
3. FILAMENT: PLA, ~2 g (modelled), 15 layers @ 0.2 mm
4. TOLERANCE BASIS, IN-HOUSE: CANNOT DETERMINE. Every Bambu on this farm records tolerance_mm: null, cite "no coupon printed and measured on this machine" (ce-machines/bambu-h2s-*, bambu-h2d-*/capabilities.json, read 2026-09-02), and Bambu Lab's own H2D Pro spec sheet carries no dimensional-accuracy line. DIMENSIONS HERE ARE NOMINAL AS MODELLED.
5. TOLERANCE BASIS, OUTSOURCED: JLC3DP +/-0.3 mm FDM (jlc3dp.com, ce-machines/farm-jlc3dp); Hubs +/-0.5%, floor +/-0.5 mm (hubs.com/3d-printing/, ce-machines/farm-hubs). Apply the route's figure, not both. The +/-0.2 mm in cecad/machining.py fdm is a repo planning constant with no vendor cite and is NOT used here. One printed and measured coupon closes this note.
6. NO ISO 286 CLASS IS DECLARED ON ANY BORE: FDM cannot be sized to one (H7/p6 at O3 is a 0.010 mm band). REAM bearing and press-fit bores after printing.

MICRODUCK-TRUNK-BASE

REV A

MATERIAL		PROCESS	SCALE
PLA		FDM	5:1
CATEGORY	GENERAL TOL	FINISH	SHEET
plate	CANNOT DETERMINE ?~	AS PRINTED	A1 1/1
VOLUME (MEASURED)		MASS (ASSUMES PLA)	UNITS
1.41 cm3		1.8 g	mm / deg
SIZE (BBOX, MEASURED)		DRAWN	PROJECTION
57.00 x 36.00 x 3.00		ce-cad 2026-09-03	THIRD ANGLE
SOURCE (DESIGN FILE)			
ce-parts/microduck-trunk-base/current/cad/part.py			