microduck-upper-leg-rigidity-plate   SCALE 2:1   A3   THIRD ANGLE

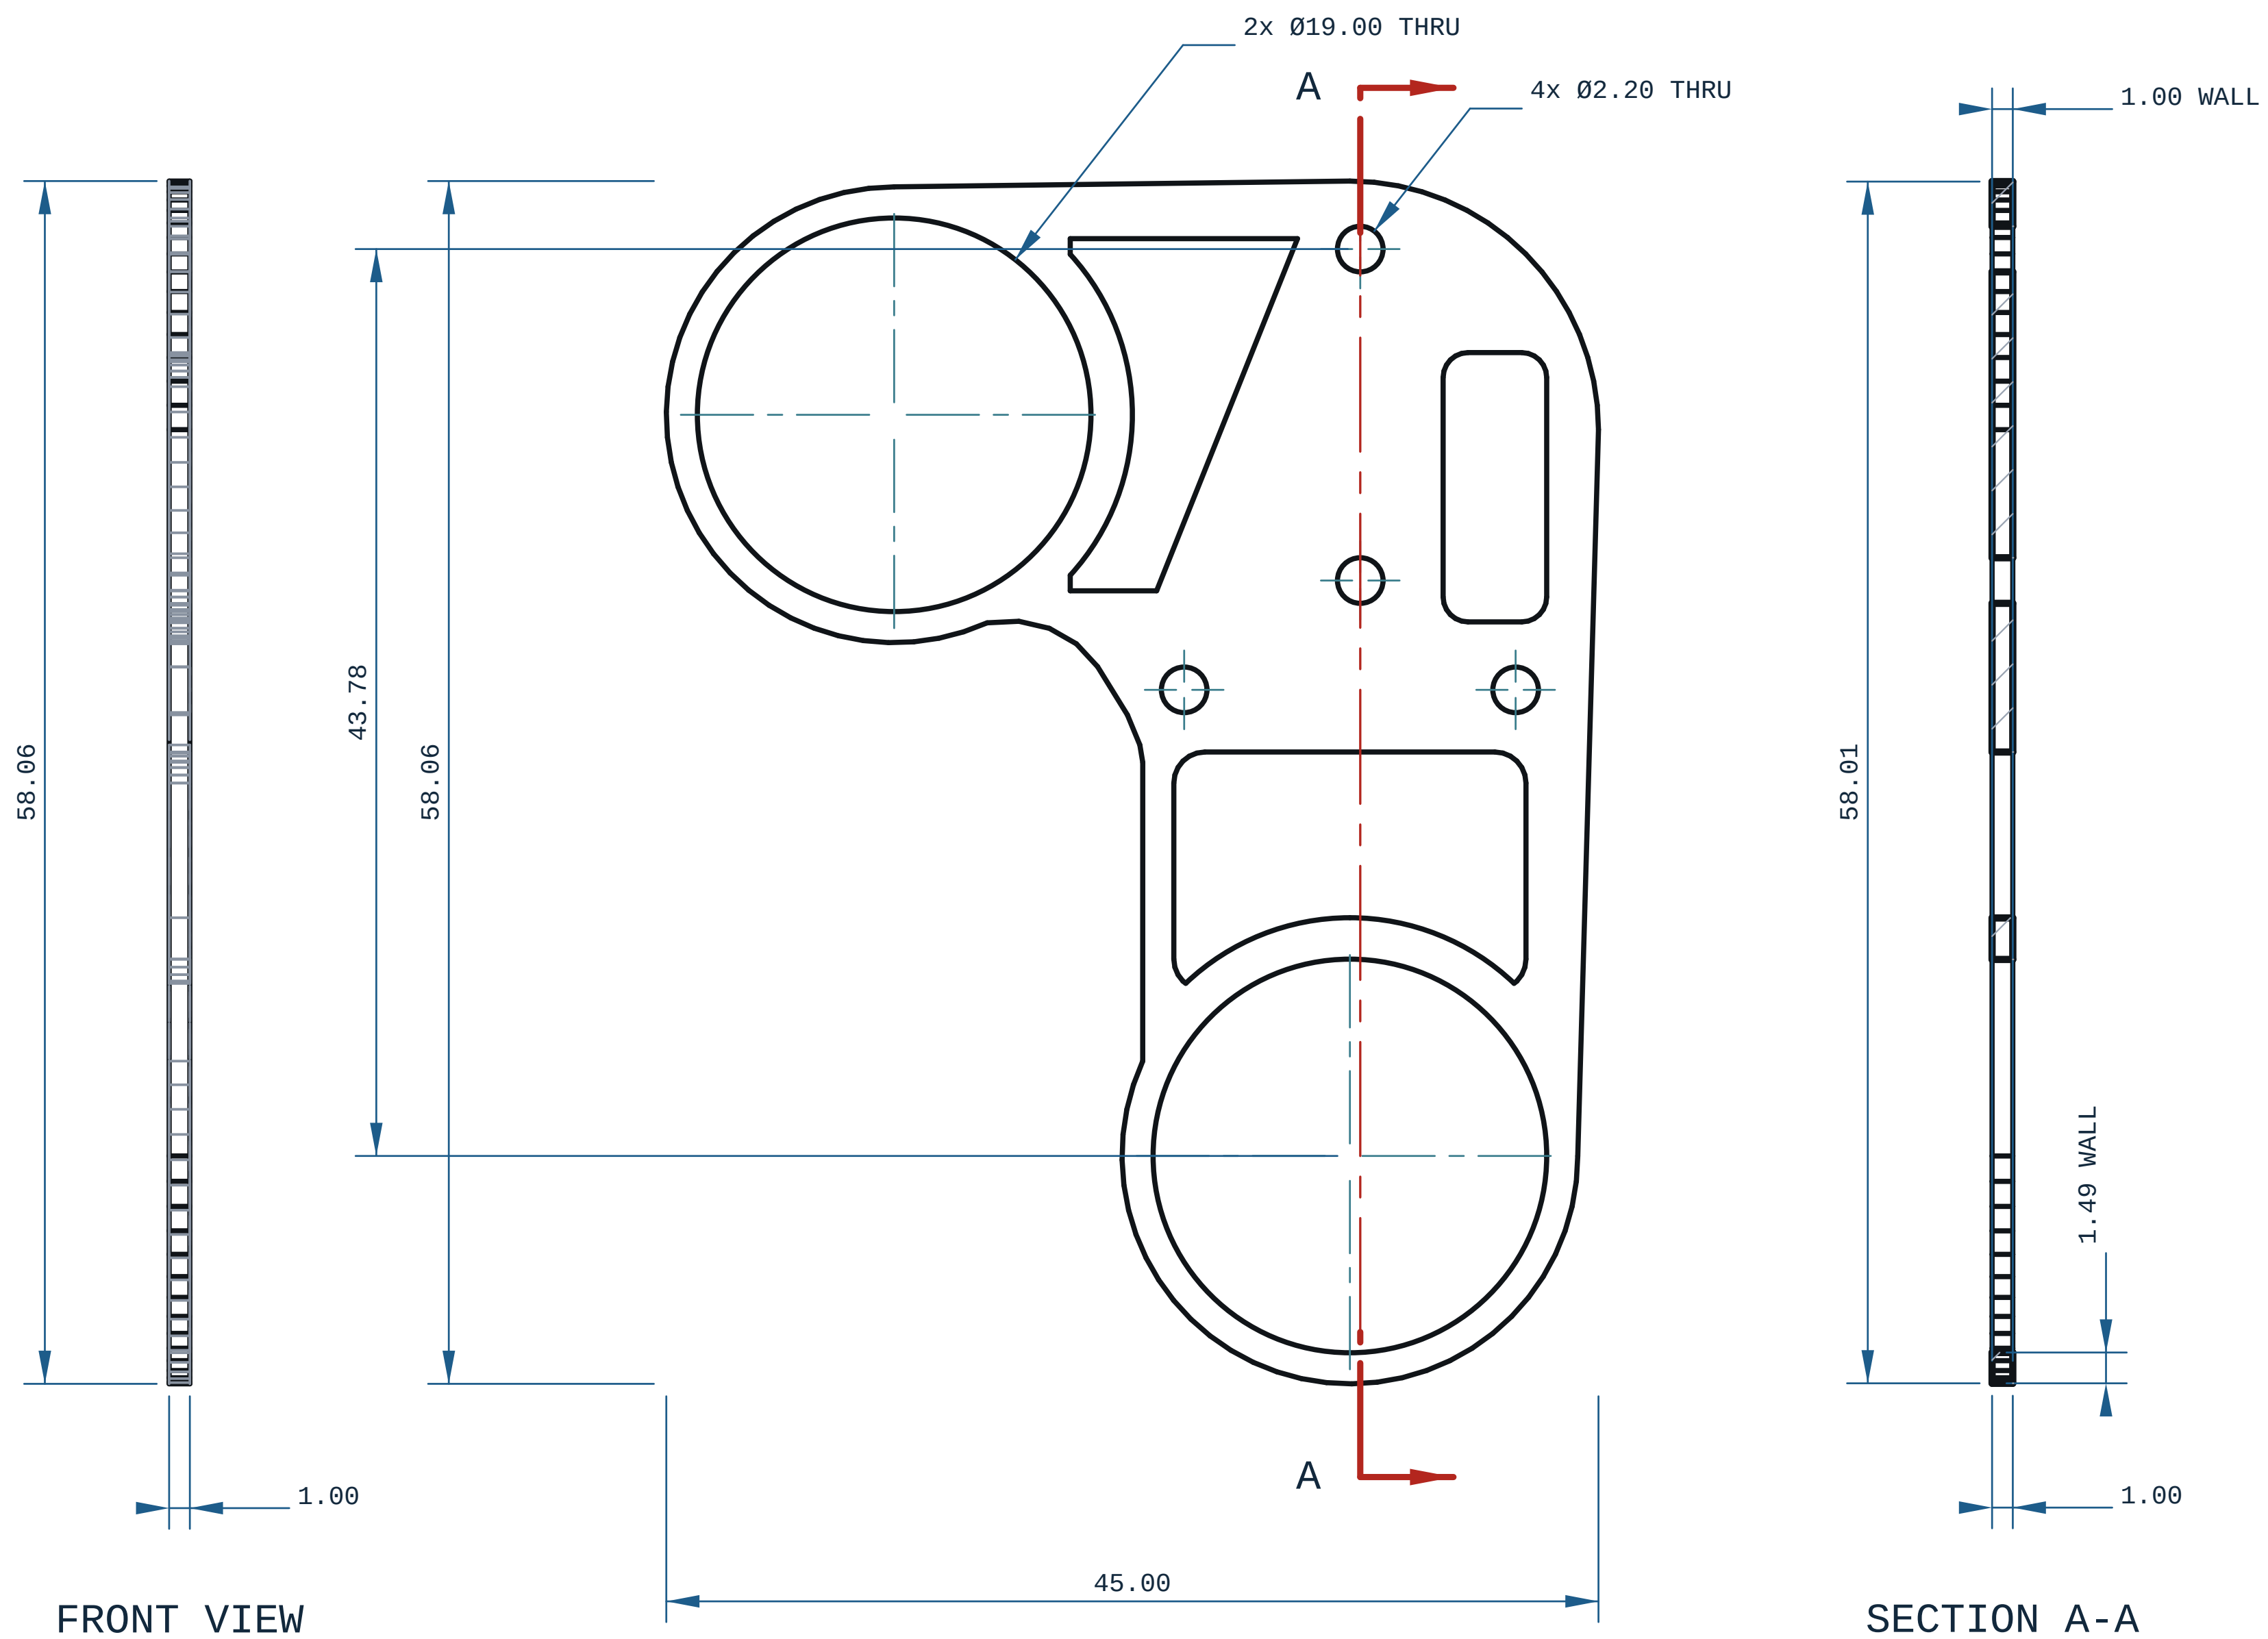

FRONT VIEW

-X ?   Z ?

RIGHT VIEW

-Y ?   Z ?

SECTION A-A

HOLE TABLE ? 6 POSITIONS

TAG	SIZE	Y	Z	C'BORE
A1	Ø2.20 THRU	-0.50	43.78	-
A2	Ø19.00 THRU	22.00	35.78	-
A3	Ø2.20 THRU	-0.50	27.78	-
A4	Ø2.20 THRU	8.00	22.50	-
A5	Ø2.20 THRU	-8.00	22.50	-
A6	Ø19.00 THRU	0.00	0.00	-

every row measured off the solid; positions are model coordinates, mm. C'BORE side is the face it opens on.

NOTES

1. ALL DIMENSIONS IN mm AND DEGREES. EVERY DIMENSION AND EVERY HOLE CALLOUT WAS MEASURED OFF THE SOLID.
2. GENERAL TOLERANCE: CANNOT DETERMINE ? THIS PART DECLARES NO PROCESS THIS REPO CAN READ.
3. SECTION A-A AT Y=-0.50: THINNEST MATERIAL FOUND BY SCAN 1.00 mm, AT X=43.00, Z=-10.49.

MICRODUCK-UPPER-LEG-RIGIDITY-PLATE

REV: A

MATERIAL		PROCESS	SCALE
PLA		-	2:1
CATEGORY: -	GENERAL TOL: SEE NOTES	FINISH: AS PRINTED	SHEET: A3 1/1
VOLUME (MEASURED): 0.74 cm3		MASS (ASSUMES PLA): 0.9 g	UNITS: mm / deg
SIZE (BBOX, MEASURED): 1.00 x 45.00 x 58.06		DRAWN: ce-cad 2026-09-02	PROJECTION: THIRD ANGLE

SOURCE (DESIGN FILE)

ce-parts/microduck-upper-leg-rigidity-plate/current/cad/part.py