microduck-foot-right SCALE 2:1 A2 THIRD ANGLE

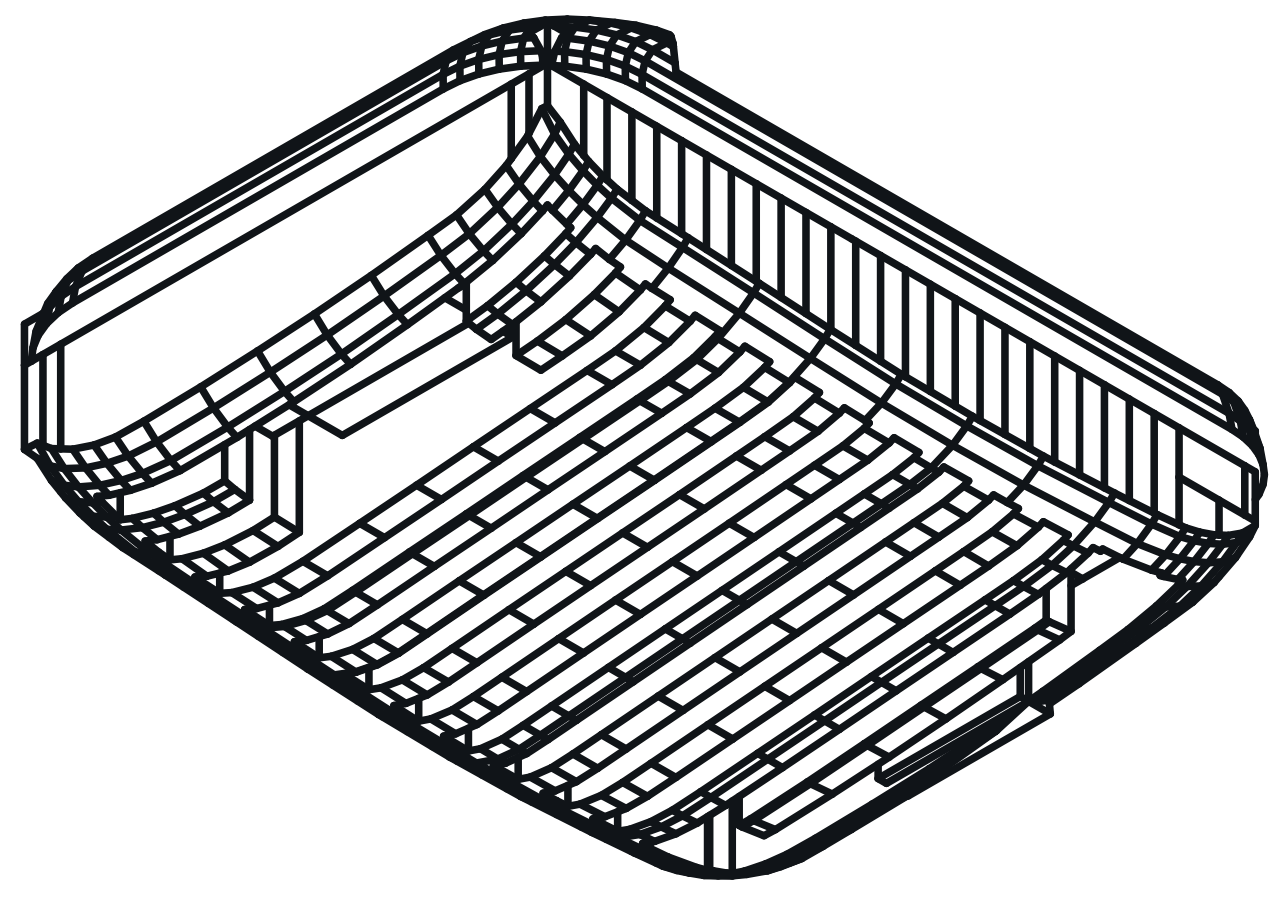

## ISOMETRIC VIEW

40.09 x 54.00 x 16.91 mm

REFERENCE RENDER (ISO2) ? rendered off this solid, 900 x 680 px

Ø1.60 THRU
C'BORE Ø3.00x0.50 +Z

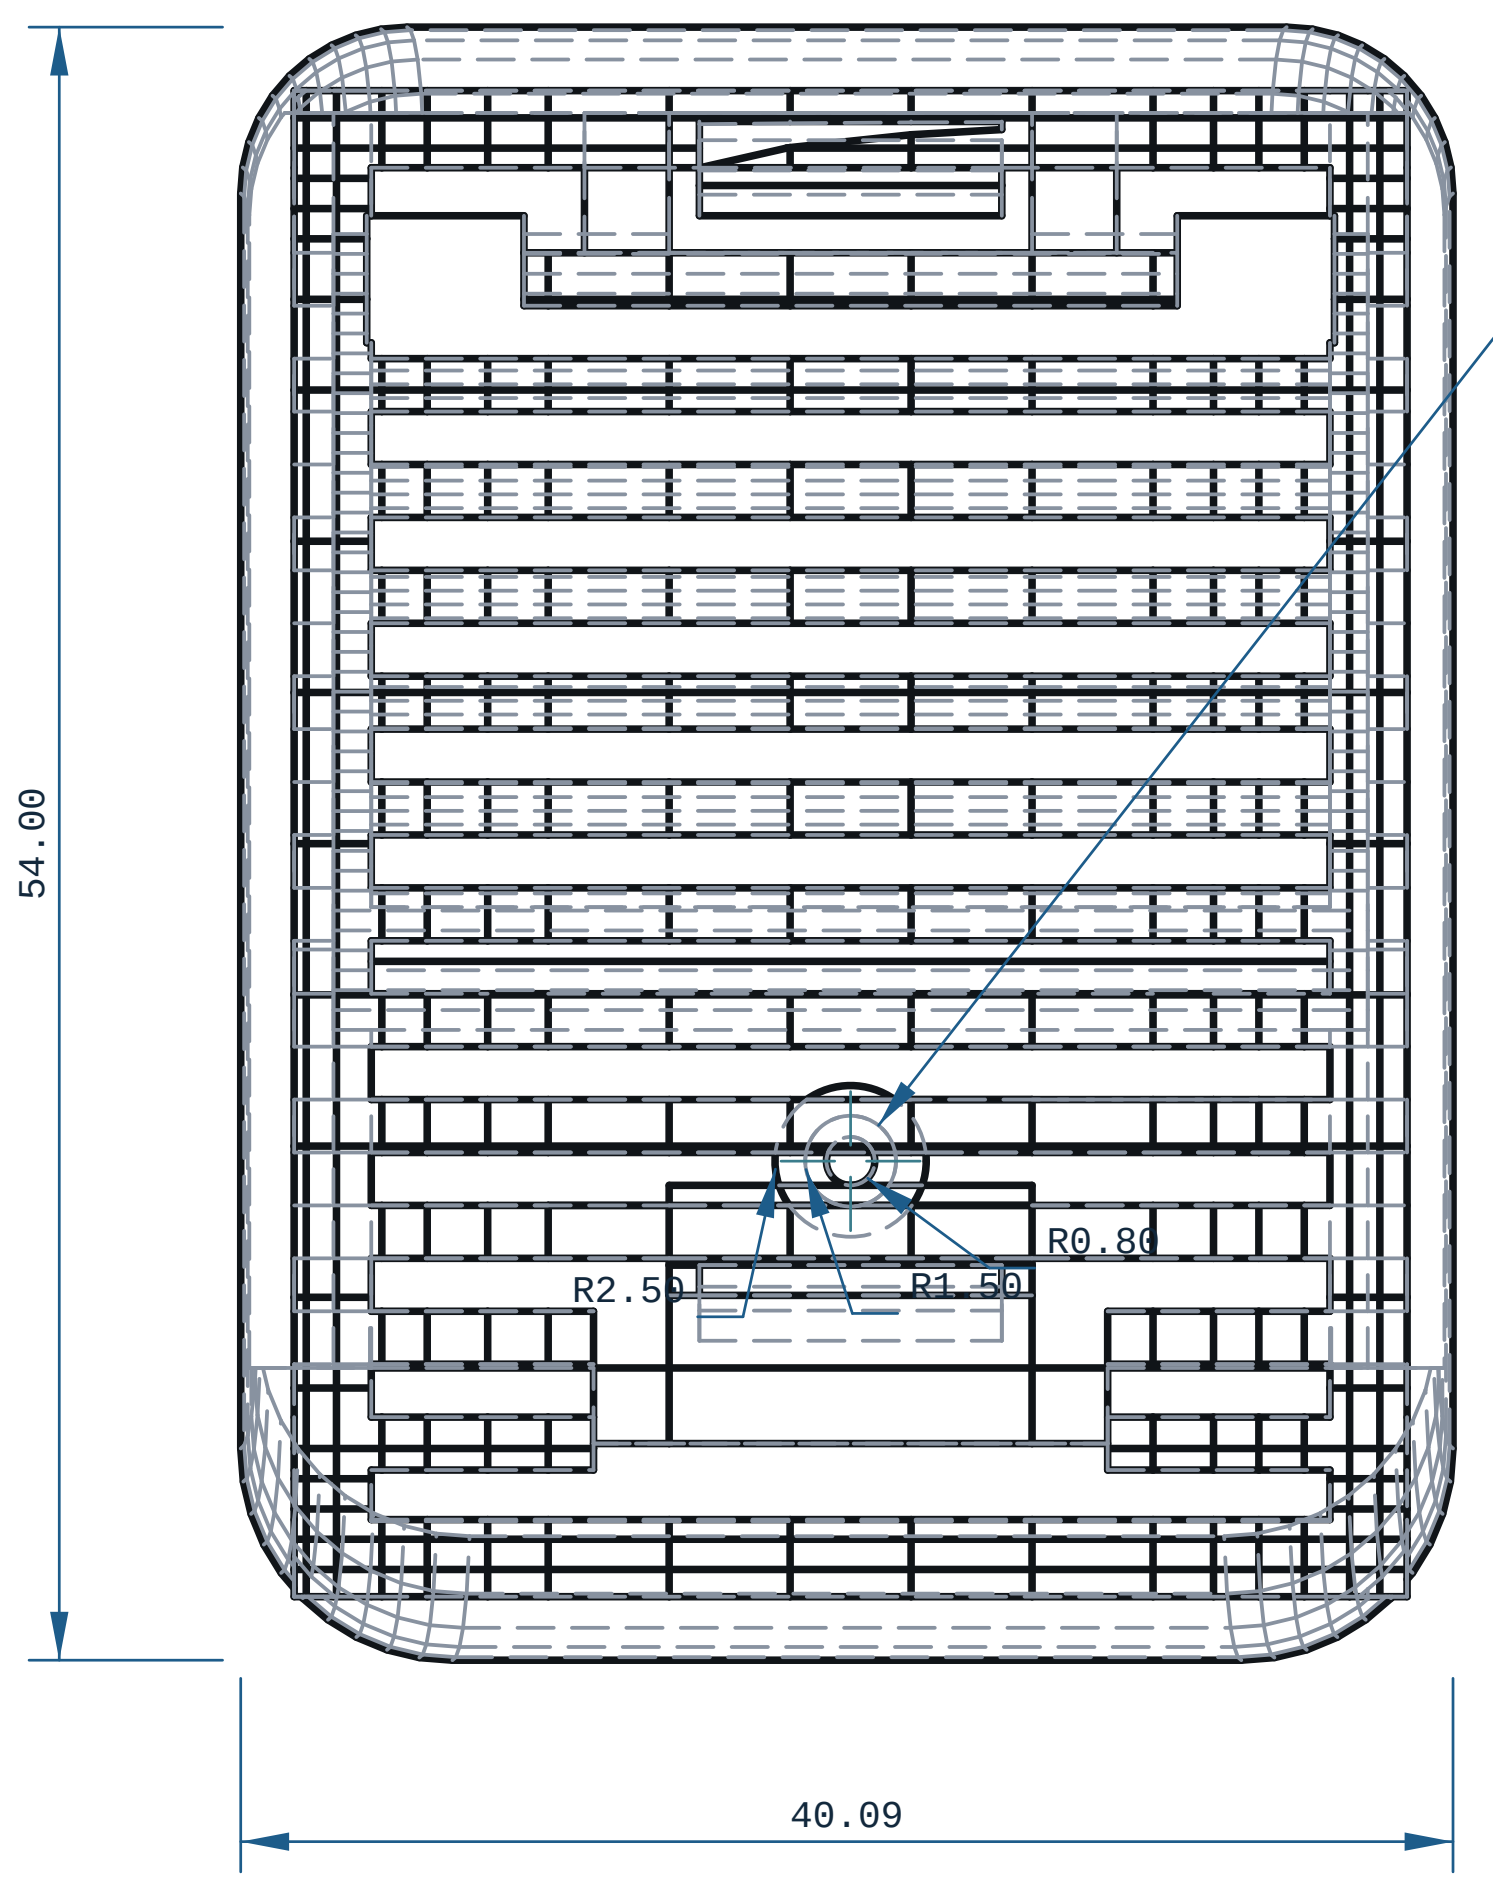


## TOP VIEW

X ? Y ?

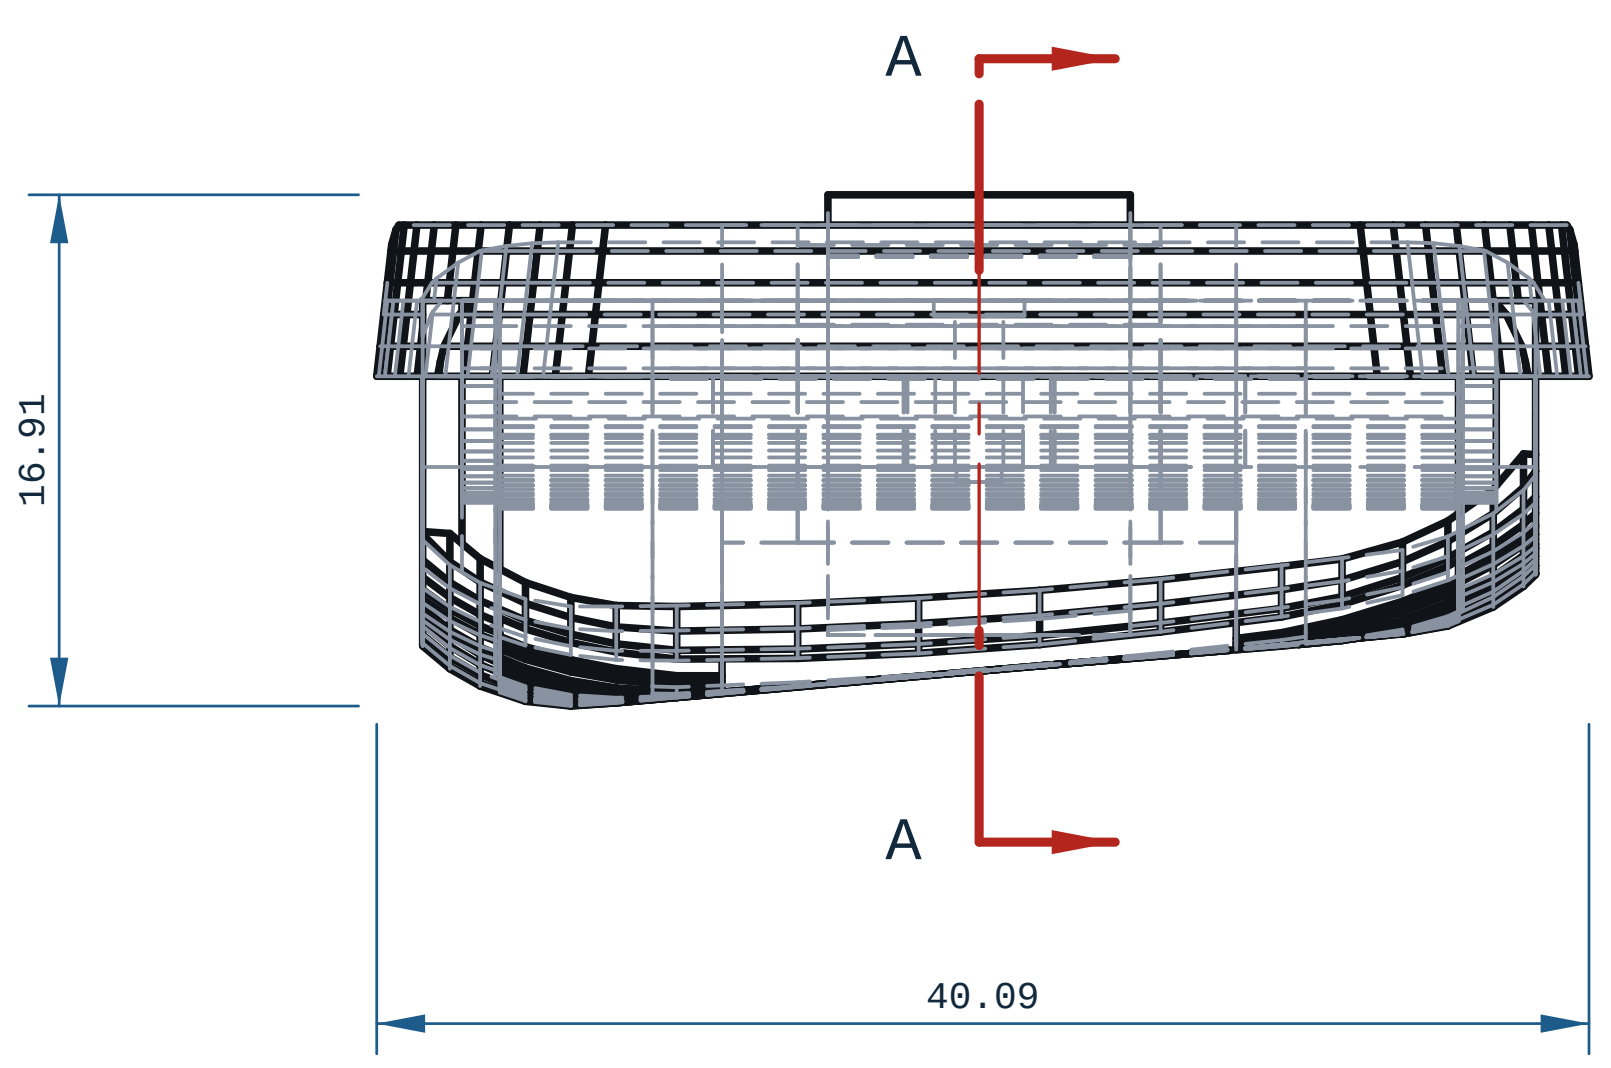


## FRONT VIEW

-X ? Z ?

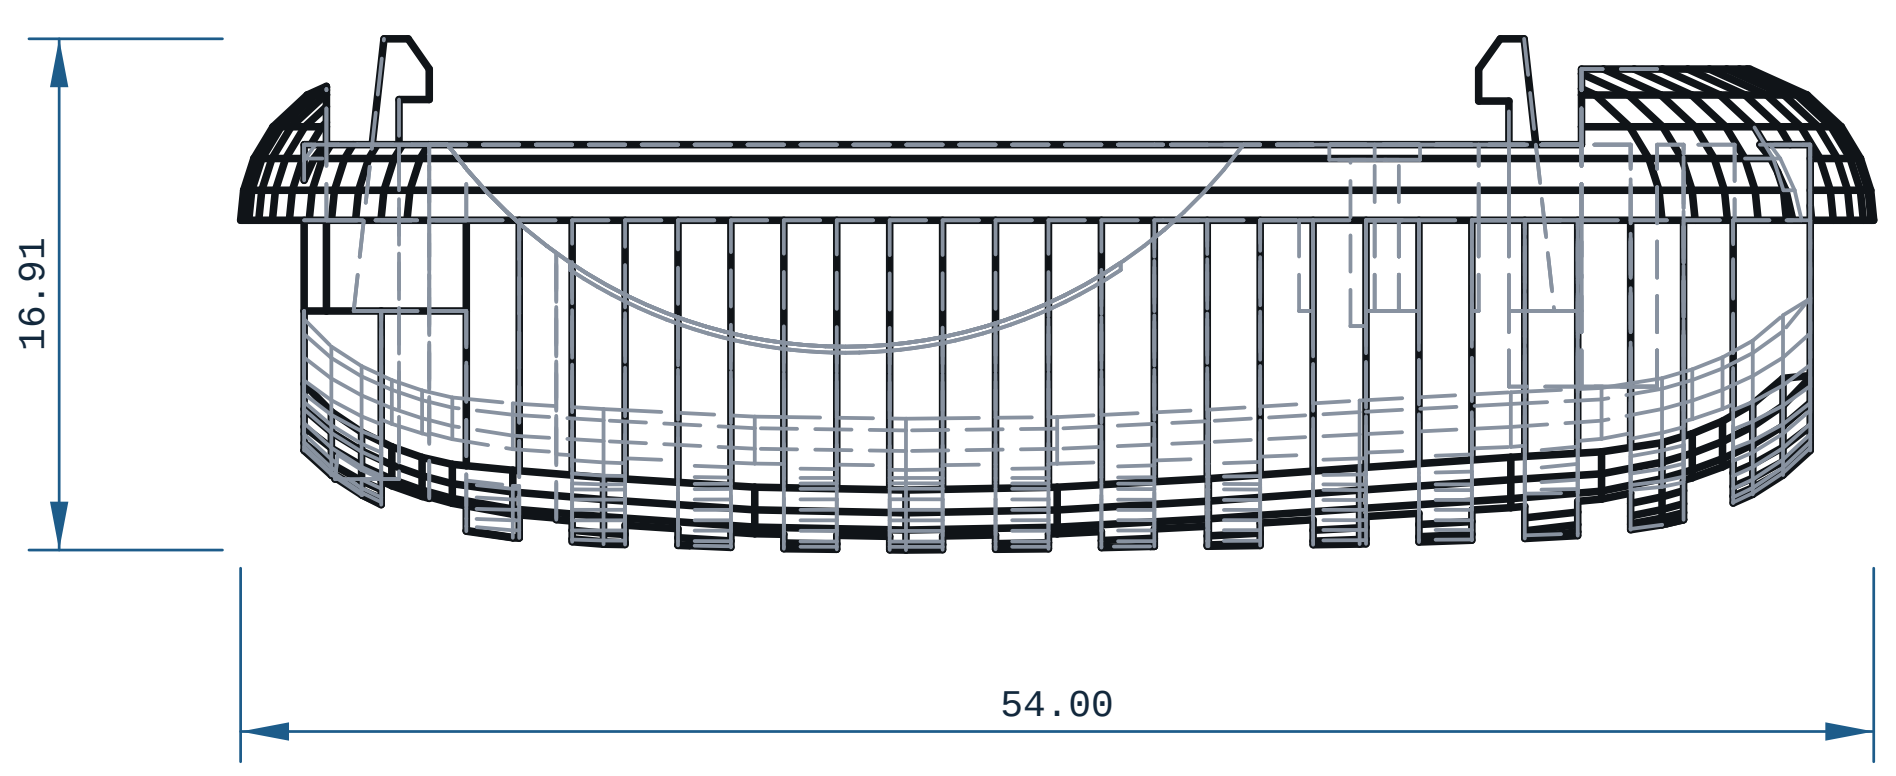


## RIGHT VIEW

-Y ? Z ?

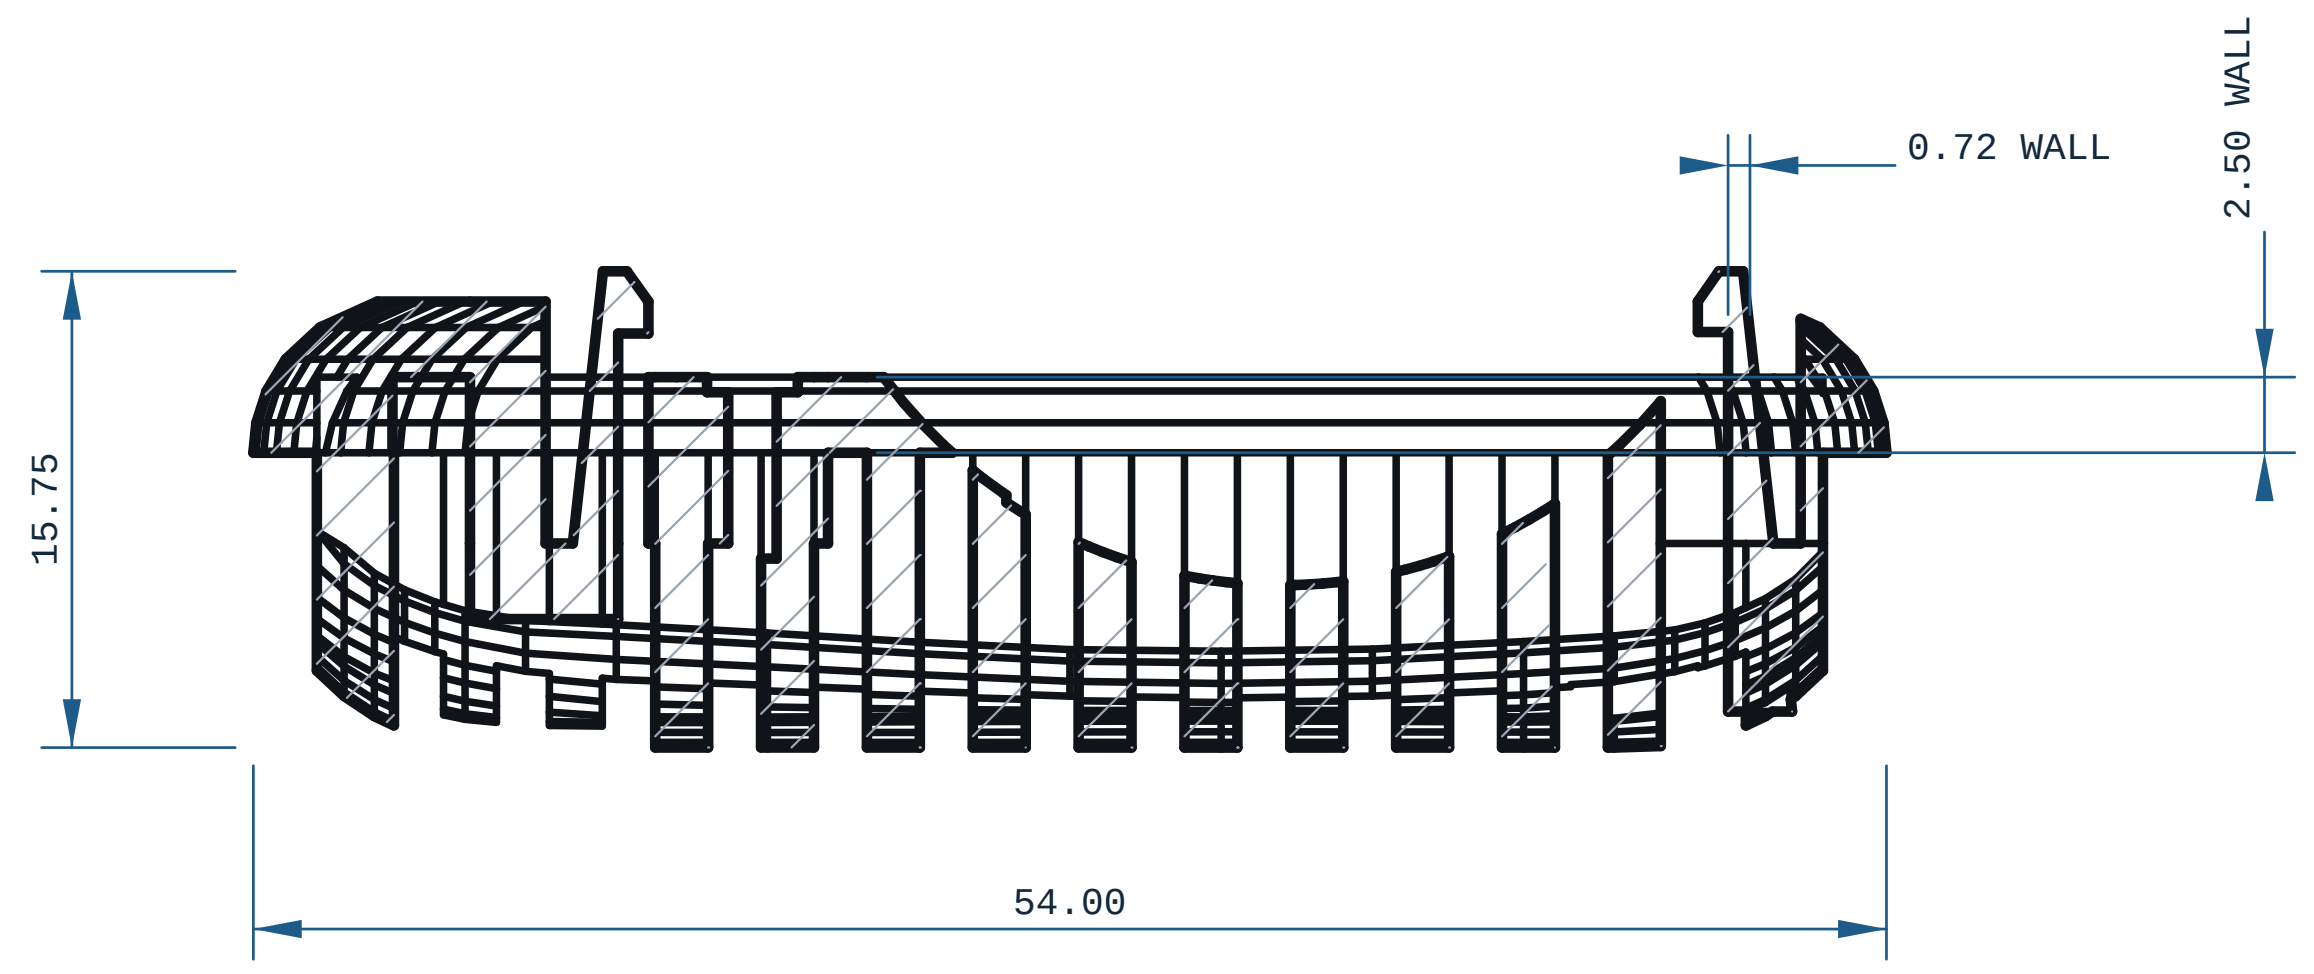


## SECTION A-A

### NOTES

1. ALL DIMENSIONS IN mm AND DEGREES. EVERY DIMENSION AND EVERY HOLE CALLOUT WAS MEASURED OFF THE SOLID.
2. PROCESS: FDM.
3. THINNEST WALL, WHOLE SOLID: 0.0150 mm, AT X=-53.600 Y=34.526 Z=-16.651 ? MEASURED OVER THE WHOLE SOLID BY RAY+EXACT AT 1.477 mm SAMPLE SPACING (A FEATURE NARROWER THAN THAT CAN BE MISSED). A RAY MINIMUM AT AN EDGE, A FILLET RUN-OUT OR A CHAMFER TIP IS A REAL DISTANCE THROUGH MATERIAL AND IS NOT A PRINTABLE WALL.
4. GENERAL TOLERANCE CANNOT DETERMINE ? SEE PRINT / DFM NOTES UNLESS STATED.
5. SECTION A-A AT X=-50.00: THINNEST MATERIAL IN THIS PLANE ONLY 0.72 mm, AT Y=37.12, Z=-14.38 ? A SCAN OF ONE CUT, NOT THE PART MINIMUM.
6. FRONT VIEW: hidden lines KEPT: without them 3 of 2745 edge samples have no ink within 0.35 mm (worst 0.458 mm) and the feature would be missing from the sheet.
7. TOP VIEW: hidden lines KEPT: without them 218 of 2952 edge samples have no ink within 0.35 mm (worst 1.029 mm) and the feature would be missing from the sheet.
8. RIGHT VIEW: hidden lines KEPT: without them 117 of 2735 edge samples have no ink within 0.35 mm (worst 1.212 mm) and the feature would be missing from the sheet.

### PRINT / DFM

1. ORIENTATION: laid flat (40 x 54 x 17 mm)
2. THINNEST WALL: 0.01 mm (floor 0.80 mm = 2 perimeters @ 0.4 mm nozzle)
3. SMALL HOLES Ø1.60 PRINT UNDERSIZE: drill to tapping size and form-tap after printing; heat-set inserts for M2 into PLA
4. FILAMENT: PLA, ~14 g (modelled), 85 layers @ 0.2 mm
5. TOLERANCE BASIS, IN-HOUSE: CANNOT DETERMINE. Every Bambu on this farm records tolerance_mm: null, cite "no coupon printed and measured on this machine" (ce-machines/bambu-h2s-*, bambu-h2d-*/capabilities.json, read 2026-09-02), and Bambu Lab's own H2D Pro spec sheet carries no dimensional-accuracy line. DIMENSIONS HERE ARE NOMINAL AS MODELLED.
6. TOLERANCE BASIS, OUTSOURCED: JLC3DP +/-0.3 mm FDM (jlc3dp.com, ce-machines/farm-jlc3dp); Hubs +/-0.5%, floor +/-0.5 mm (hubs.com/3d-printing/, ce-machines/farm-hubs). Apply the route's figure, not both. The +/-0.2 mm in cecad/machining.py fdm is a repo planning constant with no vendor cite and is NOT used here. One printed and measured coupon closes this note.
7. NO ISO 286 CLASS IS DECLARED ON ANY BORE: FDM cannot be sized to one (H7/p6 at Ø3 is a 0.010 mm band). REAM bearing and press-fit bores after printing.

# MICRODUCK-FOOT-RIGHT

| | | | |
|---|---|---|---|
| MATERIAL<br>PLA | | PROCESS<br>FDM | SCALE<br>2:1 |
| CATEGORY<br>robot-link | GENERAL TOL<br>CANNOT DETERMINE ?~ | FINISH<br>AS PRINTED | SHEET<br>A2 1/1 |
| VOLUME (MEASURED)<br>11.74 cm3 | | MASS (ASSUMES PLA)<br>14.6 g | UNITS<br>mm / deg |
| SIZE (BBOX, MEASURED)<br>40.09 x 54.00 x 16.91 | | DRAWN<br>ce-cad 2026-09-03 | PROJECTION<br>THIRD ANGLE |
| SOURCE (DESIGN FILE)<br>ce-parts/microduck-foot-right/current/cad/part.py | | | REV<br>A |