microduck-sole-right   SCALE 2:1   A2   THIRD ANGLE

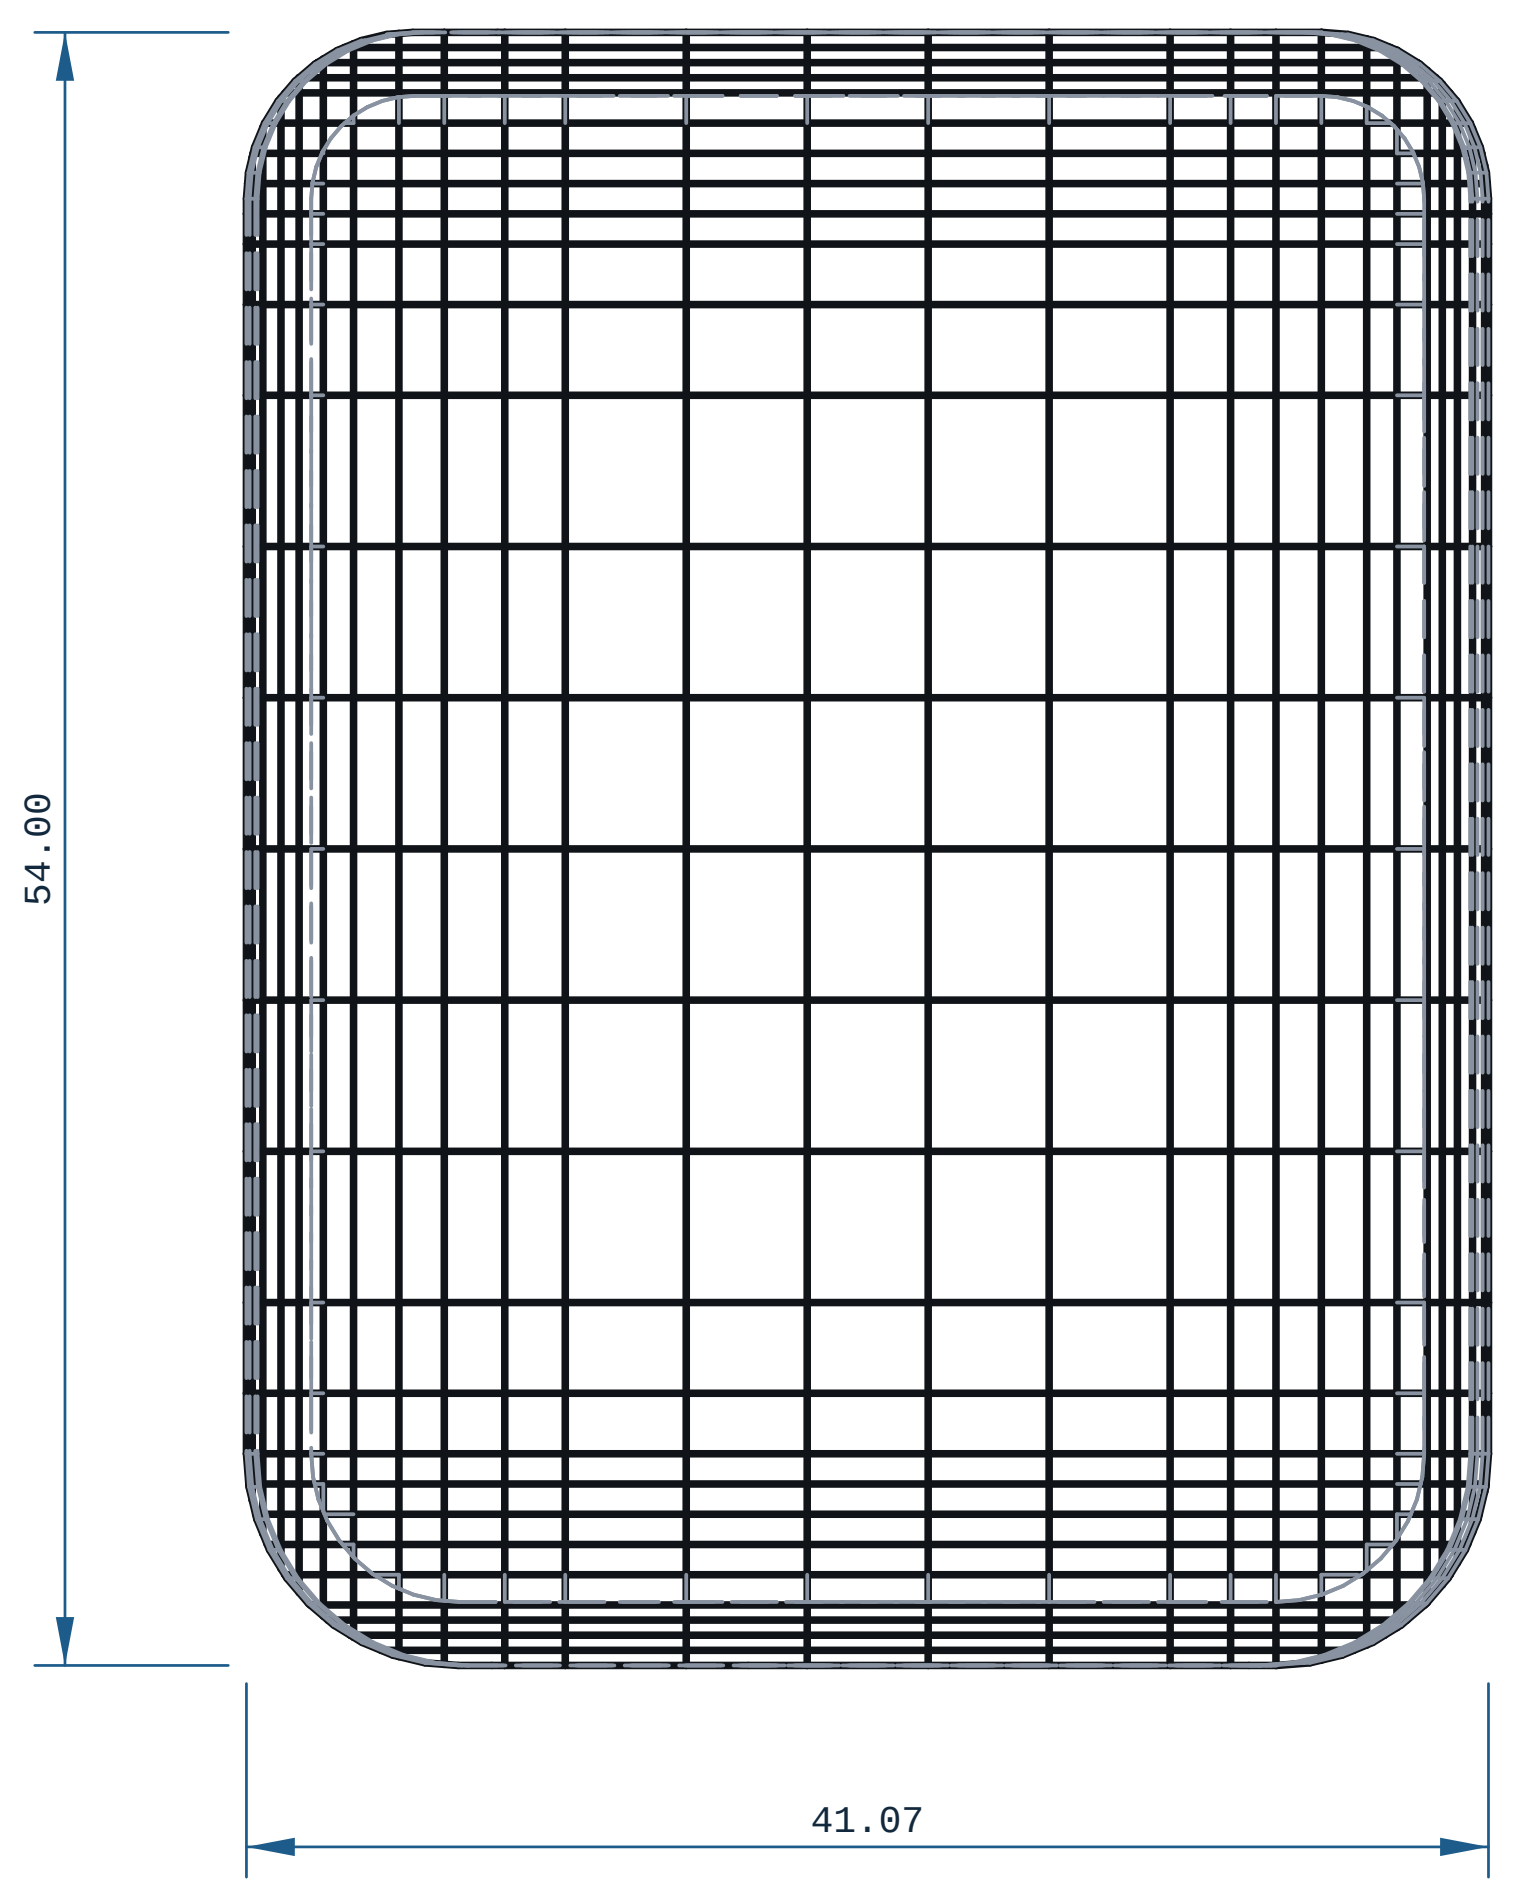

TOP VIEW

X ?   Y ?

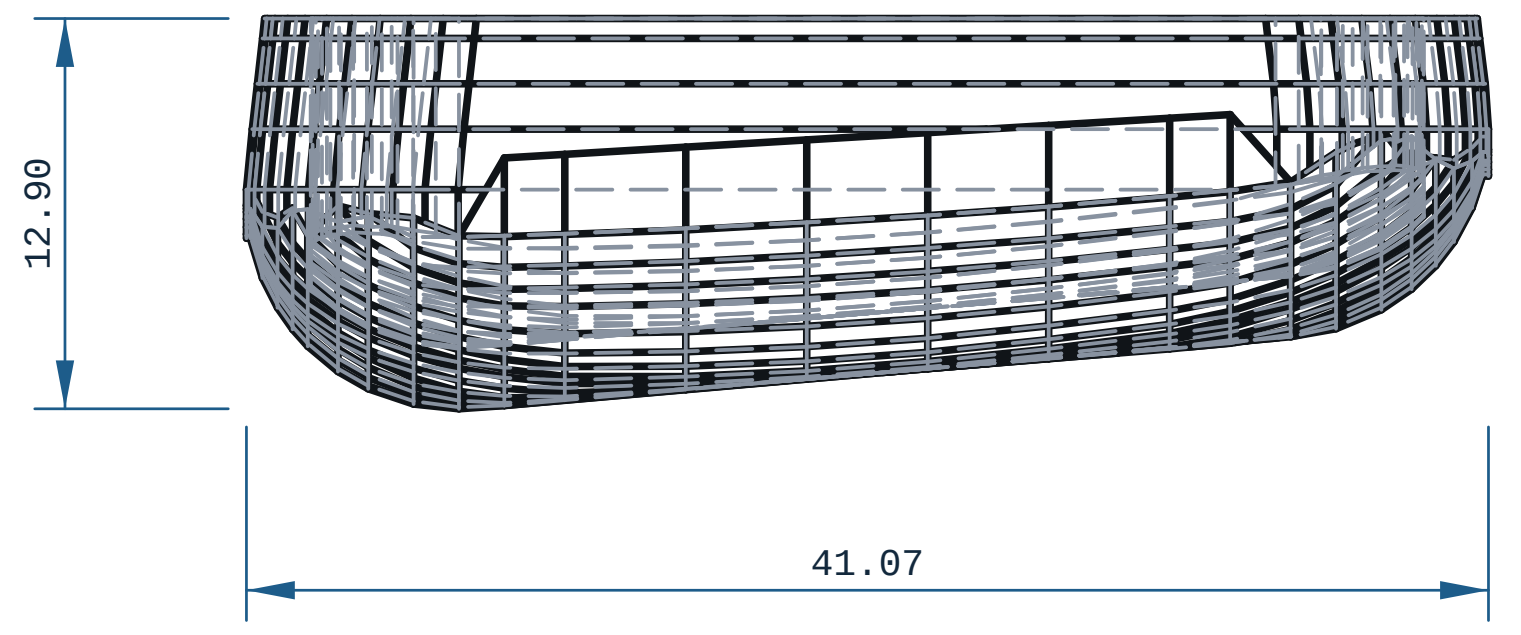

FRONT VIEW

-X ?   Z ?

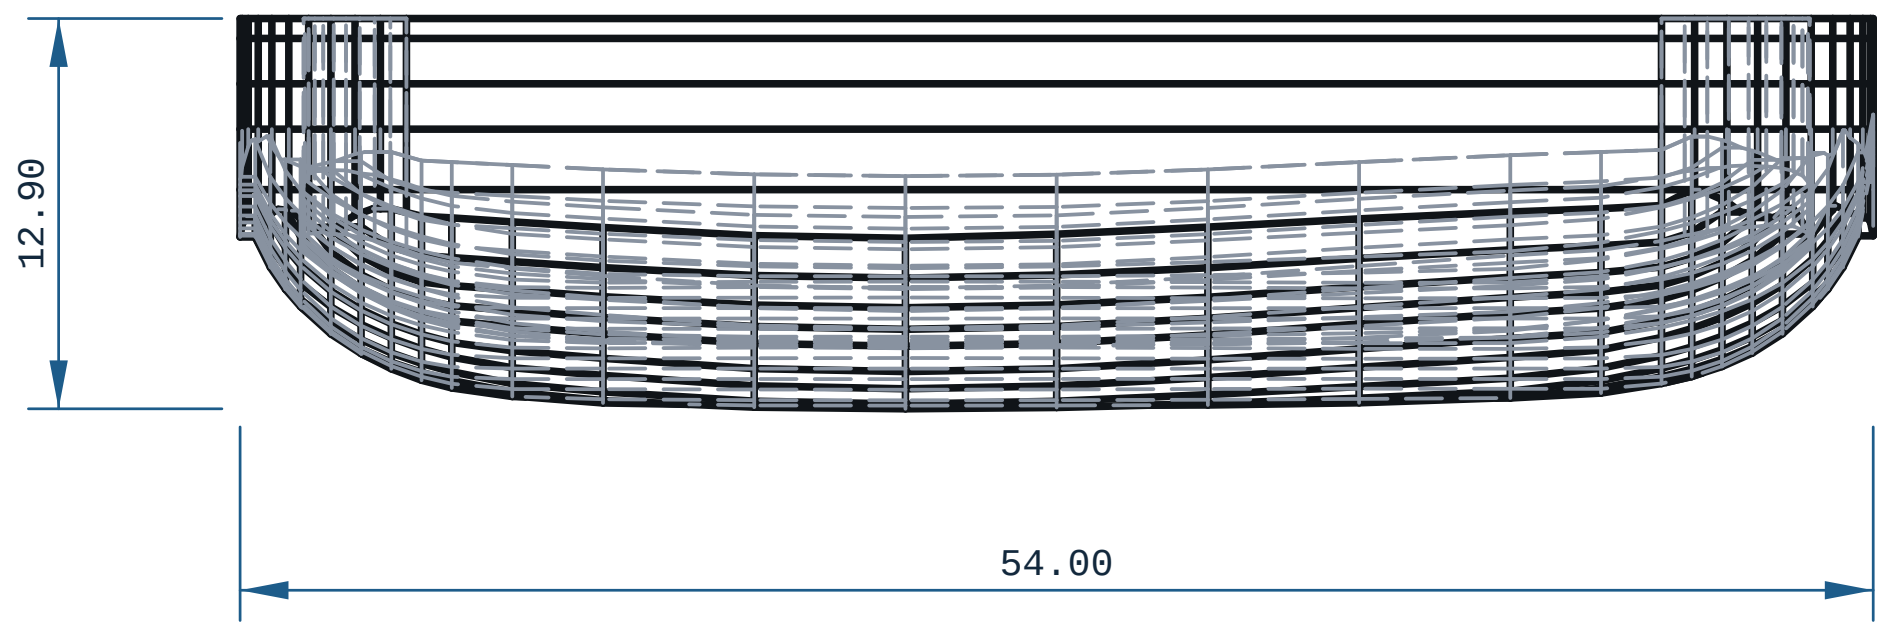

RIGHT VIEW

-Y ?   Z ?

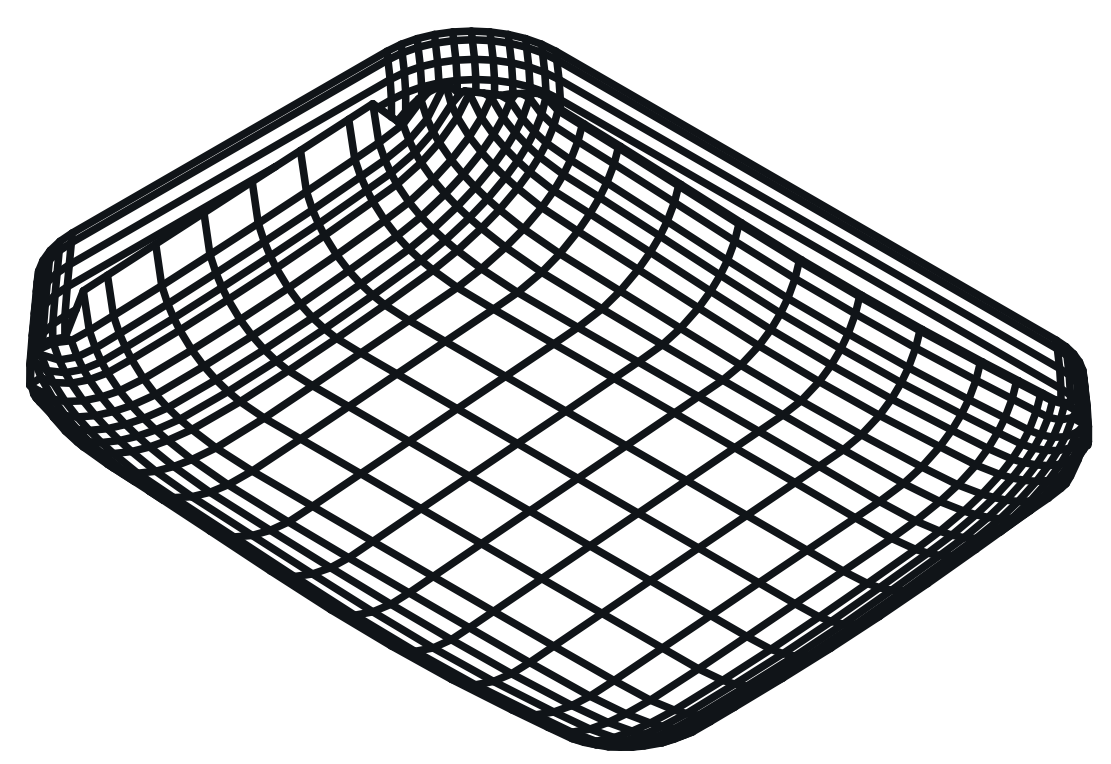

ISOMETRIC VIEW

41.07 x 54.00 x 12.90 mm

REFERENCE RENDER (ISO2) ? rendered off this solid, 900 x 680 px

NOTES

1. ALL DIMENSIONS IN mm AND DEGREES. EVERY DIMENSION AND EVERY HOLE CALLOUT WAS MEASURED OFF THE SOLID.
2. PROCESS: FDM.
3. THINNEST WALL, WHOLE SOLID: 1.2320 mm, AT X=-49.333 Y=-10.833 Z=-26.354 ? MEASURED OVER THE WHOLE SOLID BY RAY+EXACT AT 1.872 mm SAMPLE SPACING (A FEATURE NARROWER THAN THAT CAN BE MISSED). A RAY MINIMUM AT AN EDGE, A FILLET RUN-OUT OR A CHAMFER TIP IS A REAL DISTANCE THROUGH MATERIAL AND IS NOT A PRINTABLE WALL.
4. GENERAL TOLERANCE CANNOT DETERMINE ? SEE PRINT / DFM NOTES UNLESS STATED.
5. FRONT VIEW: hidden lines KEPT: without them 2 of 1099 edge samples have no ink within 0.35 mm (worst 0.384 mm) and the feature would be missing from the sheet.
6. TOP VIEW: hidden lines KEPT: without them 6 of 1103 edge samples have no ink within 0.35 mm (worst 0.439 mm) and the feature would be missing from the sheet.
7. RIGHT VIEW: hidden lines KEPT: without them 37 of 1080 edge samples have no ink within 0.35 mm (worst 0.968 mm) and the feature would be missing from the sheet.

PRINT / DFM

1. ORIENTATION: laid flat (41 x 54 x 13 mm)
2. THINNEST WALL: 1.23 mm (floor 0.80 mm = 2 perimeters @ 0.4 mm nozzle)
3. FILAMENT: TPU, ~7 g (modelled), 65 layers @ 0.2 mm
4. TOLERANCE BASIS, IN-HOUSE: CANNOT DETERMINE. Every Bambu on this farm records tolerance_mm: null, cite "no coupon printed and measured on this machine" (ce-machines/bambu-h2s-*, bambu-h2d-*/capabilities.json, read 2026-09-02), and Bambu Lab's own H2D Pro spec sheet carries no dimensional-accuracy line. DIMENSIONS HERE ARE NOMINAL AS MODELLED.
5. TOLERANCE BASIS, OUTSOURCED: JLC3DP +/-0.3 mm FDM (jlc3dp.com, ce-machines/farm-jlc3dp); Hubs +/-0.5%, floor +/-0.5 mm (hubs.com/3d-printing/, ce-machines/farm-hubs). Apply the route's figure, not both. The +/-0.2 mm in cecad/machining.py fdm is a repo planning constant with no vendor cite and is NOT used here. One printed and measured coupon closes this note.
6. NO ISO 286 CLASS IS DECLARED ON ANY BORE: FDM cannot be sized to one (H7/p6 at O3 is a 0.010 mm band). REAM bearing and press-fit bores after printing.

MICRODUCK-SOLE-RIGHT

MATERIAL TPU		PROCESS FDM	SCALE 2:1
CATEGORY robot-link	GENERAL TOL CANNOT DETERMINE ?~	FINISH AS PRINTED	SHEET A2 1/1
VOLUME (MEASURED) 6.26 cm3		MASS (ASSUMES TPU) 7.6 g	UNITS mm / deg
SIZE (BBOX, MEASURED) 41.07 x 54.00 x 12.90		DRAWN ce-cad 2026-09-03	PROJECTION THIRD ANGLE
SOURCE (DESIGN FILE) ce-parts/microduck-sole-right/current/cad/part.py			

REV A