microduck-shin   SCALE 5:1   A1   THIRD ANGLE

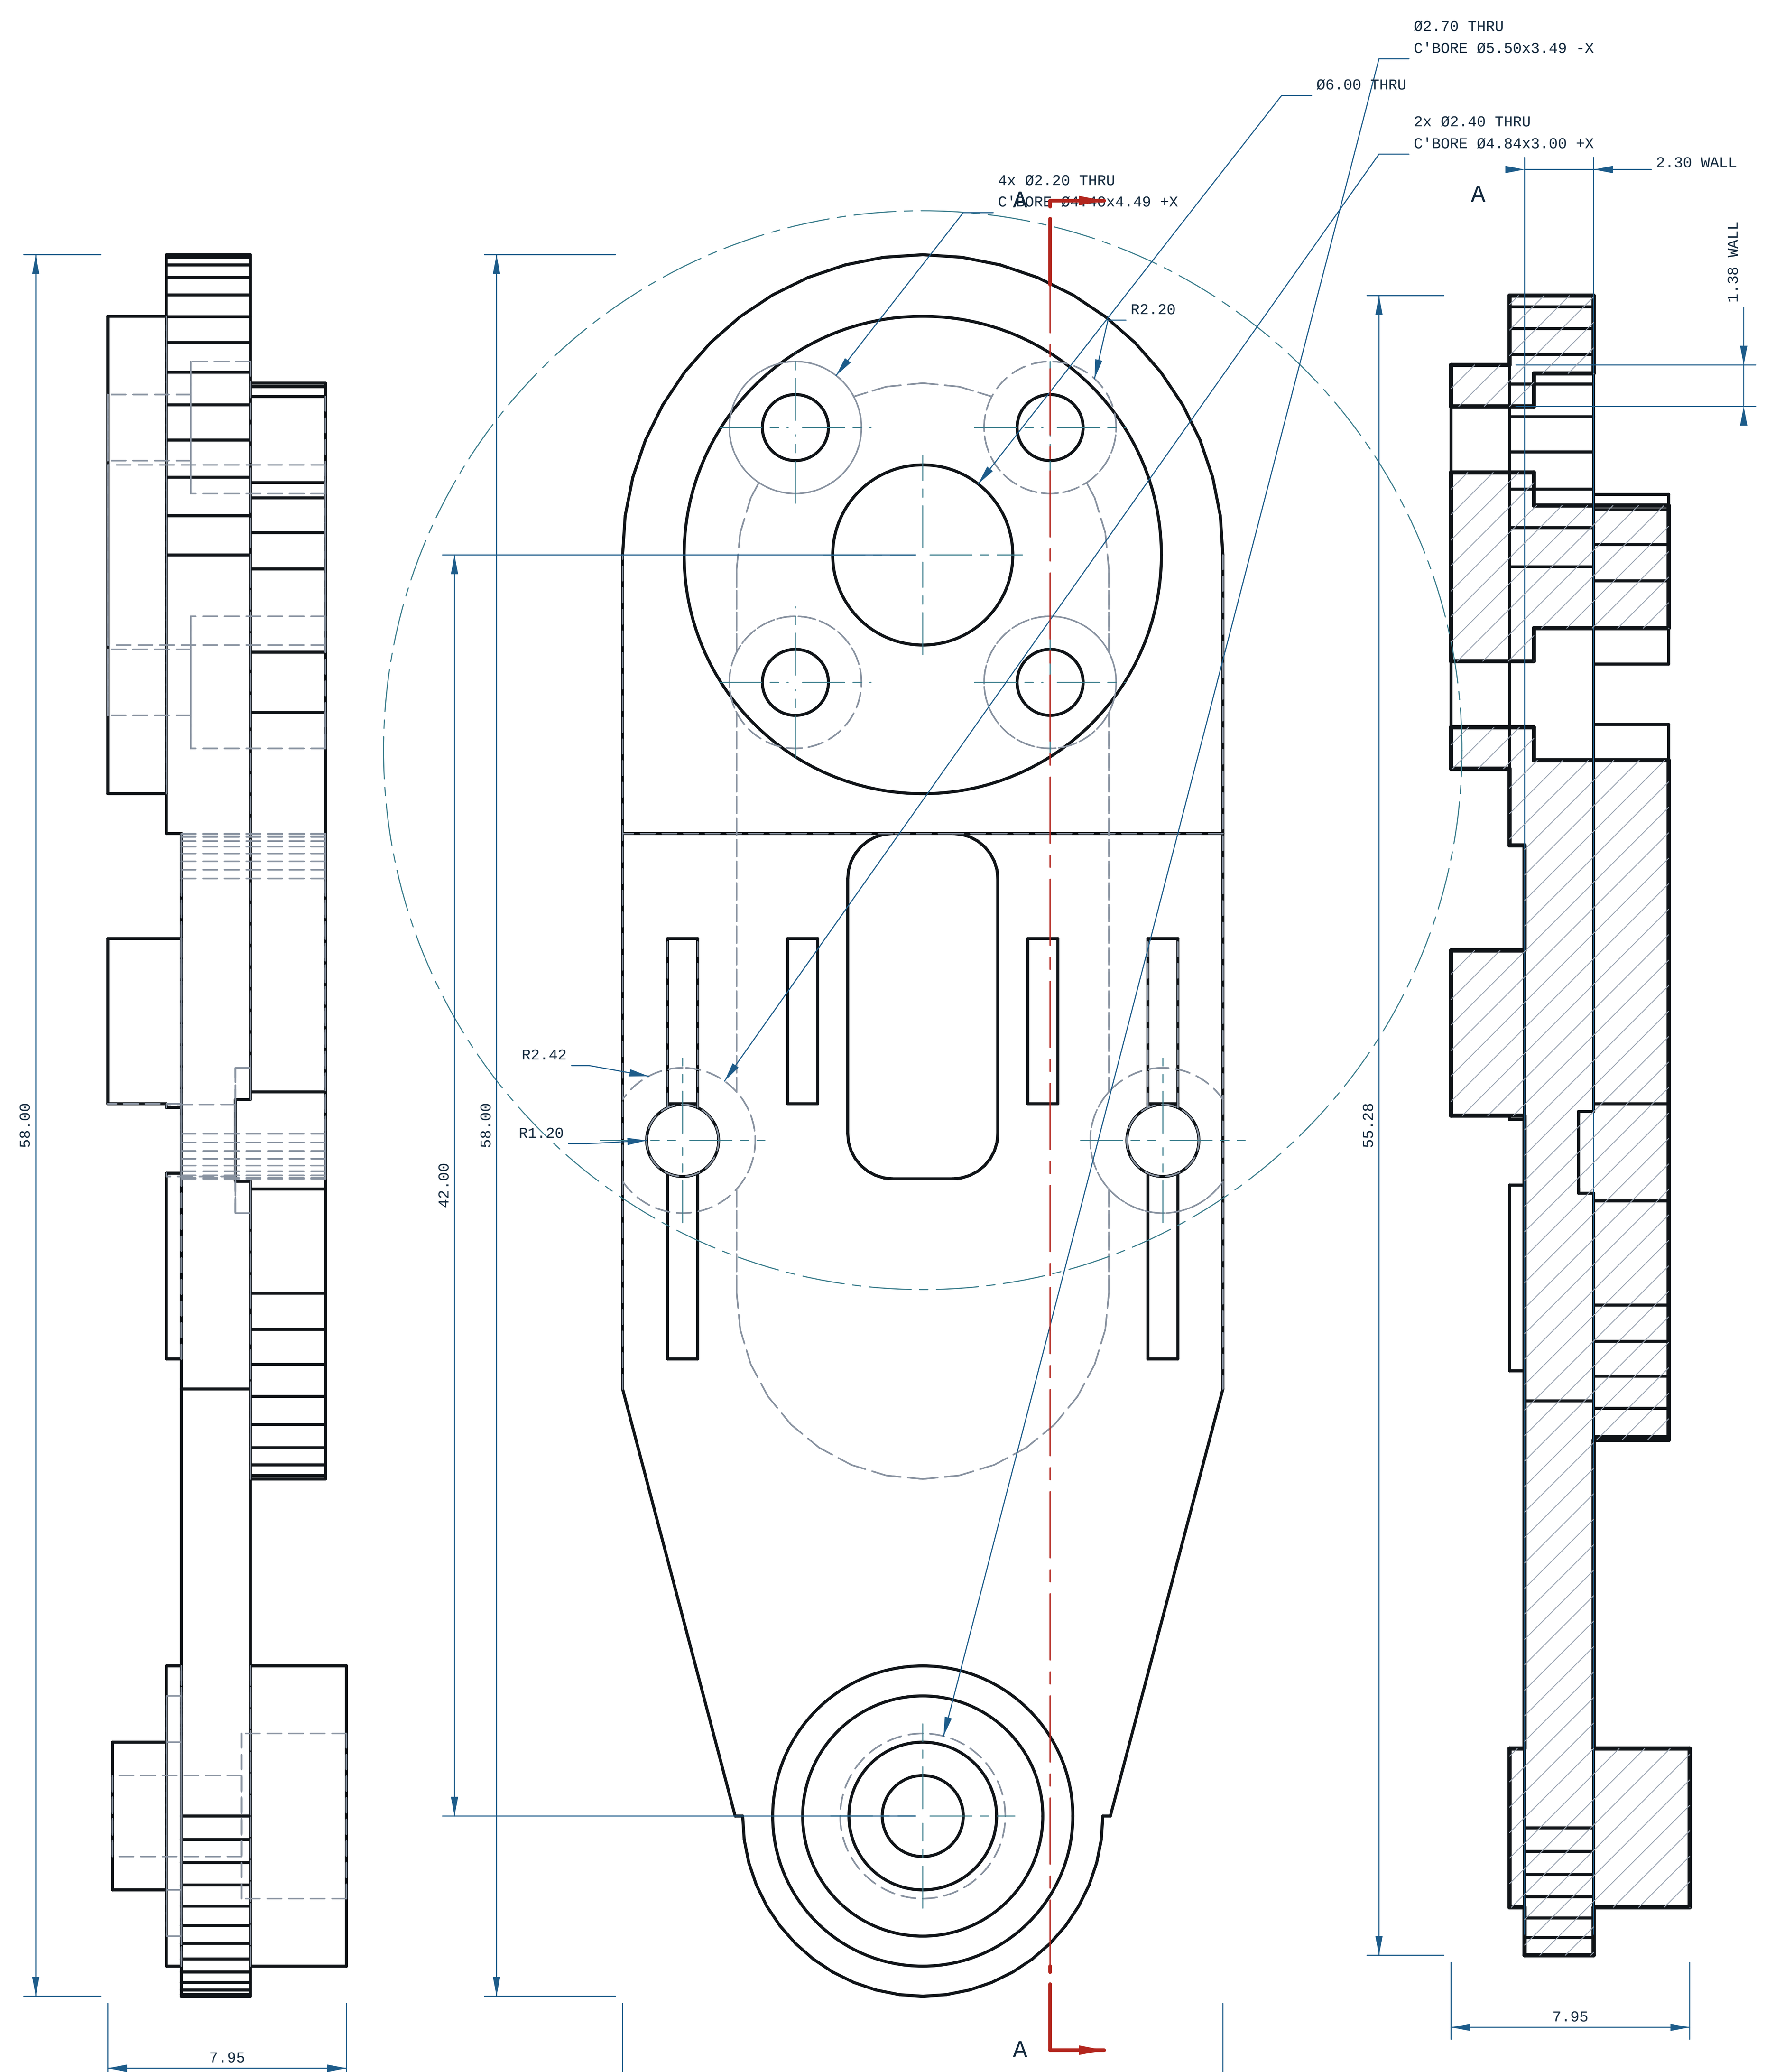

FRONT VIEW

-X ?   Z ?

RIGHT VIEW

-Y ?   Z ?

SECTION A-A

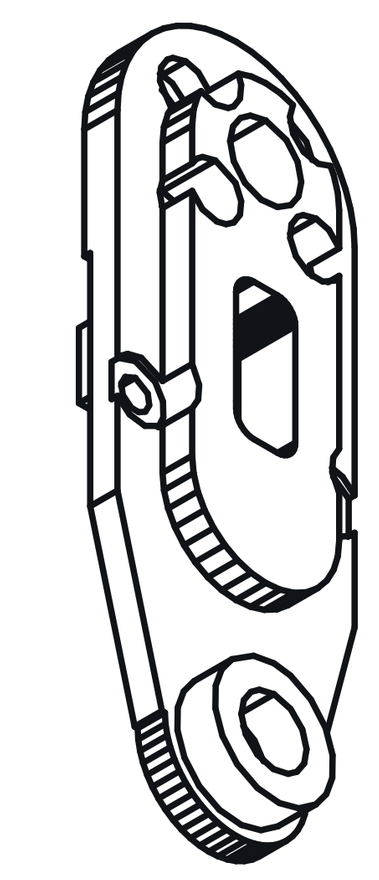

ISOMETRIC VIEW

7.95 x 20.00 x 58.00 mm

REFERENCE RENDER (ISO2) ? rendered off this solid, 900 x 680 px

HOLE TABLE ? 8 POSITIONS

TAG	SIZE	Y	Z	C'BORE
A1	Ø2.20 THRU	26.24	40.02	Ø4.40x4.49 +X
A2	Ø2.20 THRU	17.76	40.02	Ø4.40x4.49 +X
A3	Ø6.00 THRU	22.00	35.78	-
A4	Ø2.20 THRU	26.24	31.53	Ø4.40x4.49 +X
A5	Ø2.20 THRU	17.76	31.53	Ø4.40x4.49 +X
A6	Ø2.40 THRU	30.00	16.28	Ø4.84x3.00 +X
A7	Ø2.40 THRU	14.00	16.28	Ø4.84x3.00 +X
A8	Ø2.70 THRU	22.00	-6.22	Ø5.50x3.49 -X

every row measured off the solid; positions are model coordinates, mm. C'BORE side is the face it opens on.

NOTES

1. ALL DIMENSIONS IN mm AND DEGREES. EVERY DIMENSION AND EVERY HOLE CALLOUT WAS MEASURED OFF THE SOLID.
2. PROCESS: FDM.
3. THINNEST WALL, WHOLE SOLID: 0.0280 mm, AT X=35.867 Y=31.977 Z=14.882 ? MEASURED OVER THE WHOLE SOLID BY RAY+EXACT AT 1.045 mm SAMPLE SPACING (A FEATURE NARROWER THAN THAT CAN BE MISSED). A RAY MINIMUM AT AN EDGE, A FILLET RUN-OUT OR A CHAMFER TIP IS A REAL DISTANCE THROUGH MATERIAL AND IS NOT A PRINTABLE WALL.
4. GENERAL TOLERANCE CANNOT DETERMINE ? SEE PRINT / DFM NOTES UNLESS STATED.
5. SECTION A-A AT Y=17.76: THINNEST MATERIAL IN THIS PLANE ONLY 1.38 mm, AT X=38.53, Z=41.81 ? A SCAN OF ONE CUT, NOT THE PART MINIMUM.
6. RIGHT VIEW: the suppression probe could not run (AttributeError: 'list' object has no attribute 'get'), so hidden lines are KEPT.
7. FRONT VIEW: the suppression probe could not run (AttributeError: 'list' object has no attribute 'get'), so hidden lines are KEPT.

PRINT / DFM

1. ORIENTATION: upright, Z-up (8 x 20 x 58 mm)
2. THINNEST WALL: 0.03 mm (floor 0.80 mm = 2 perimeters @ 0.4 mm nozzle)
3. 15 horizontal bore(s) bridge at the crown: ream any bearing or press-fit bore to size
4. FILAMENT: PLA, ~4 g (modelled), 290 layers @ 0.2 mm
5. TOLERANCE BASIS (IN-HOUSE): CANNOT DETERMINE. Every Bambu machine on this farm records tolerance_mm: null with the cite "no coupon printed and measured on this machine" (ce-machines/bambu-h2s-*/capabilities.json, ce-machines/bambu-h2d-*/capabilities.json, read 2026-09-02), and Bambu Lab's own H2D Pro technical specification carries no dimensional-accuracy line at all. Dimensions on this sheet are NOMINAL AS MODELLED.
6. TOLERANCE BASIS (OUTSOURCED): JLC3DP publishes +/-0.3 mm for FDM (jlc3dp.com, ce-machines/farm-jlc3dp/capabilities.json) and Hubs publishes +/-0.5% with a +/-0.5 mm floor (hubs.com/3d-printing/, ce-machines/farm-hubs/capabilities.json). Quote whichever route makes the part; do not apply both.
7. THE +/-0.2 mm IN cecad/machining.py PROCESSES['fdm'].tolerance_mm IS A REPO PLANNING CONSTANT WITH NO VENDOR CITE and is deliberately not used as this sheet's general tolerance. One printed and measured calibration coupon on the machine that will make this part closes this note.
8. FITS: no bore on this part carries a declared ISO 286 class, because FDM cannot be sized to one ? H7/p6 at O3 is a 0.010 mm band against a process nobody here has measured. Bearing and press-fit bores are called out to REAM AFTER PRINTING in the note above.

SCALE 2:1

DETAIL A

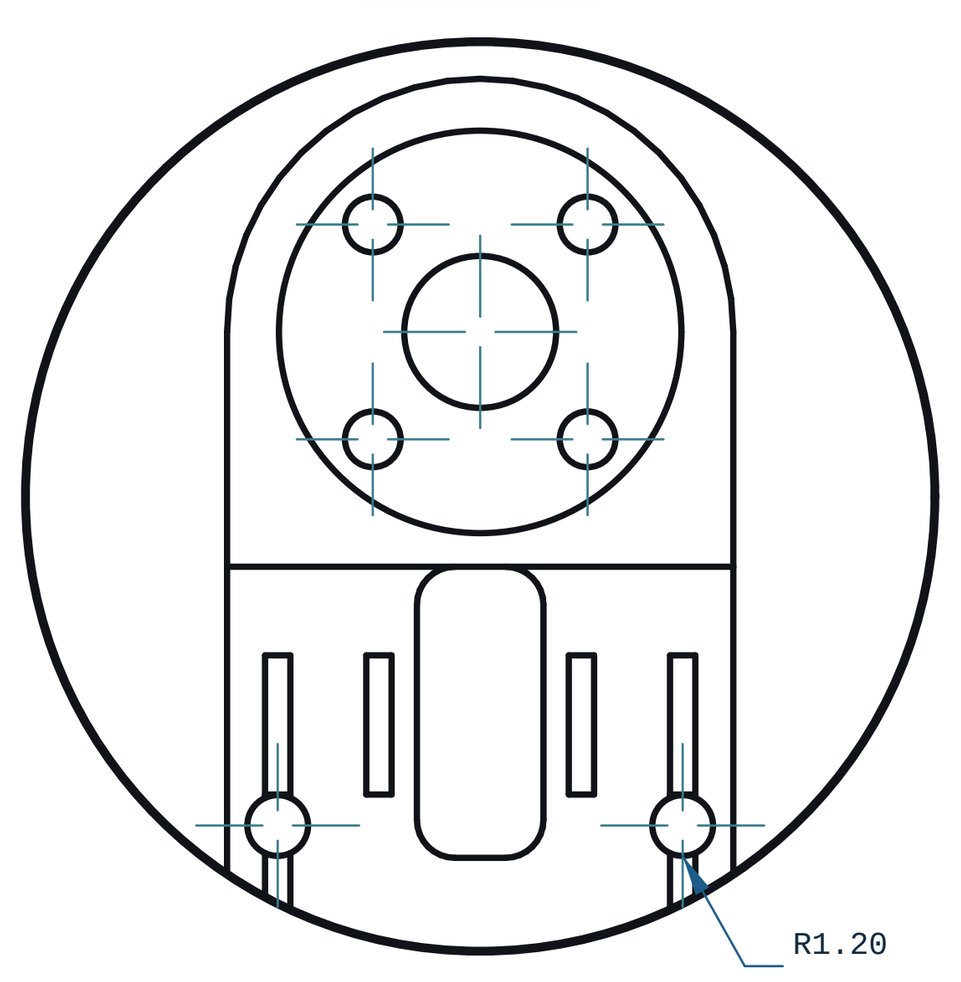

MICRODUCK-SHIN		REV A
MATERIAL: PLA	PROCESS: FDM	SCALE: 5:1
CATEGORY: bracket / GENERAL TOL: CANNOT DETERMINE ?~	FINISH: AS PRINTED	SHEET: A1 1/1
VOLUME (MEASURED): 3.39 cm3	MASS (ASSUMES PLA): 4.2 g	UNITS: mm / deg
SIZE (BBOX, MEASURED): 7.95 x 20.00 x 58.00	DRAWN: ce-cad 2026-09-02	PROJECTION: THIRD ANGLE
SOURCE (DESIGN FILE): ce-parts/microduck-shin/current/cad/part.py		