


HOLE TABLE ? 10 POSITIONS

TAG	SIZE	X	Z	C'BORE
A1	Ø1.55 x 7.80 DP	25.00	53.60	-
A2	Ø1.55 x 7.80 DP	-25.00	53.60	-
A3	Ø1.60 THRU	10.60	9.85	-
A4	Ø1.60 THRU	-10.60	9.85	-
A5	Ø1.60 THRU	7.45	7.95	-
A6	Ø1.60 THRU	-7.45	7.95	-
A7	Ø1.60 THRU	7.45	-13.95	-
A8	Ø1.60 THRU	-7.45	-13.95	-
A9	Ø1.60 THRU	10.60	-15.85	-
A10	Ø1.60 THRU	-10.60	-15.85	-

every row measured off the solid; positions are model coordinates, mm. C'BORE side is the face it opens on.


NOTES

- ALL DIMENSIONS IN mm AND DEGREES. EVERY DIMENSION AND EVERY HOLE CALLOUT WAS MEASURED OFF THE SOLID.
- GENERAL TOLERANCE: CANNOT DETERMINE ? THIS PART DECLARES NO PROCESS THIS REPO CAN READ.
- SECTION A-A AT Y=20.50: THINNEST MATERIAL FOUND BY SCAN 1.70 mm, AT X=11.60, Z=41.02.

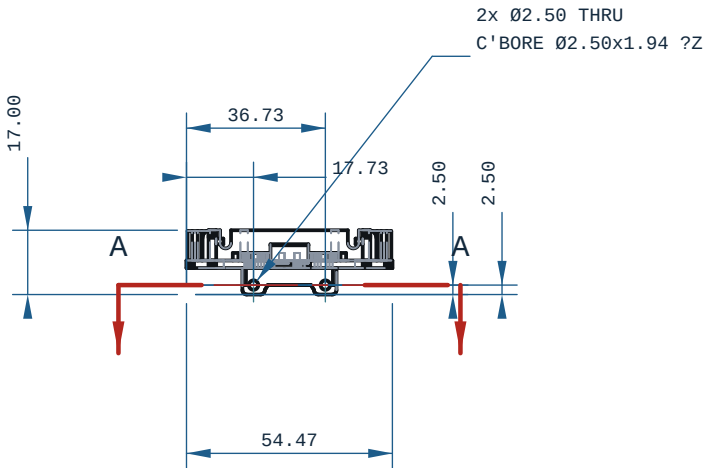


TOP VIEW

X ? Y ?

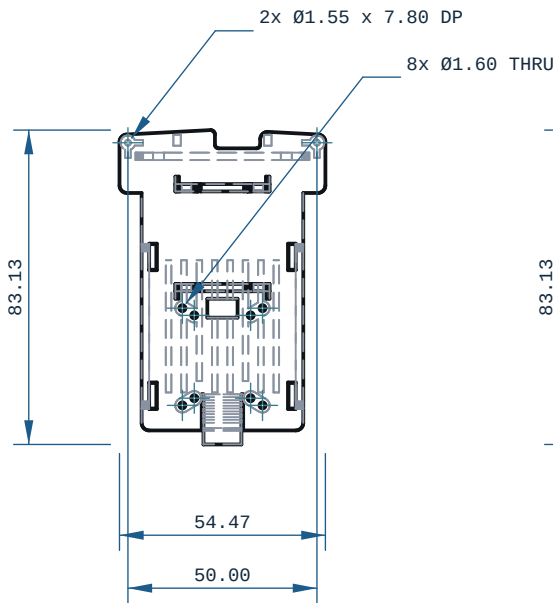


FRONT VIEW

-X ? Z ?

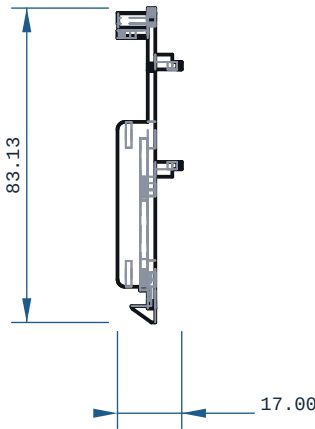

RIGHT VIEW

-Y ? Z ?



SECTION A-A

MICRODUCK-POWER-SUPPORT



REV

A

MATERIAL		PROCESS	SCALE
PLA		-	1:2
CATEGORY	GENERAL TOL	FINISH	SHEET
-	SEE NOTES	AS PRINTED	A3 1/1
VOLUME (MEASURED)		MASS (ASSUMES PLA)	UNITS
10.78 cm3		13.4 g	mm / deg
SIZE (BBOX, MEASURED)		DRAWN	PROJECTION
54.47 x 17.00 x 83.13		ce-cad 2026-09-02	THIRD ANGLE
SOURCE (DESIGN FILE)			
ce-parts/microduck-power-support/current/cad/part.py			