




ISOMETRIC VIEW

41.07 x 54.00 x 12.90 mm

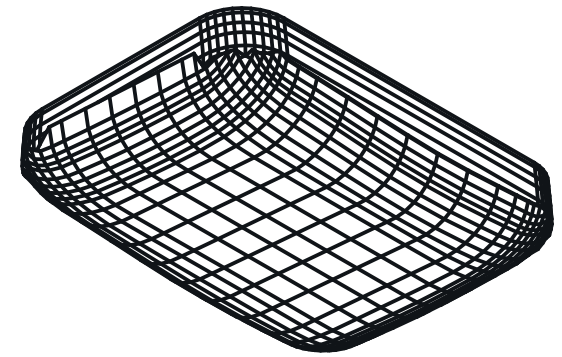


REFERENCE RENDER (ISO2) ? rendered off this solid,
900 x 680 px

NOTES

1. ALL DIMENSIONS IN MM AND DEGREES. EVERY DIMENSION AND EVERY HOLE CALLOUT WAS MEASURED OFF THE SOLID.
2. PROCESS: FDM.
3. THINNEST WALL, WHOLE SOLID: 1.2320 mm, AT X=50.667 Y=-18.833 Z=-26.268 ? MEASURED OVER THE WHOLE SOLID BY RAY+EXACT AT 1.874 mm SAMPLE SPACING (A FEATURE NARROWER THAN THAT CAN BE MISSED). A RAY MINIMUM AT AN EDGE, A FILLET RUN-OUT OR A CHAMFER TIP IS A REAL DISTANCE THROUGH MATERIAL AND IS NOT A PRINTABLE WALL.
4. GENERAL TOLERANCE CANNOT DETERMINE ? SEE PRINT / DFM NOTES UNLESS STATED.
5. FRONT VIEW: hidden lines KEPT: without them 2 of 1099 edge samples have no ink within 0.35 mm (worst 0.384 mm) and the feature would be missing from the sheet.
6. TOP VIEW: hidden lines KEPT: without them 6 of 1103 edge samples have no ink within 0.35 mm (worst 0.439 mm) and the feature would be missing from the sheet.
7. RIGHT VIEW: hidden lines KEPT: without them 15 of 1130 edge samples have no ink within 0.35 mm (worst 0.379 mm) and the feature would be missing from the sheet.


PRINT / DFM

1. ORIENTATION: laid flat (41 x 54 x 13 mm)
2. THINNESS WALL: 1.23 mm (floor 0.80 mm = 2 perimeters @ 0.4 mm nozzle)
3. FILAMENT: TPU, ~7 g (modelled), 65 layers @ 0.2 mm
4. TOLERANCE BASIS, IN-HOUSE: CANNOT DETERMINE. Every Bambu on this farm records tolerance_mm: null, cite "no coupon printed and measured on this machine" (ce-machines/bambu-h2s*", bambu-h2d-*/capabilities.json, read 2026-09-02), and Bambu Lab's own H2D Pro spec sheet carries no dimensional-accuracy line. DIMENSIONS here are NOMINAL AS MODELLED.
5. TOLERANCE BASIS, OUTSOURCED: JLC3DP +/-0.3 mm FDM (jlc3dp.com, ce-machines/farm-jlc3dp); Hubs +/-0.5%, floor +/-0.5 mm (hubs.com/3d-printing/, ce-machines/farm-hubs). Apply the route's figure, not both. The +/-0.2 mm in cecad/machining.py fdm is a repro planning constant with no vendor cite and is NOT used here. One printed and measured coupon closes this note.
6. NO ISO 286 CLASS IS DECLARED ON ANY BORE: FDM cannot be sized to one (H7/p6 at 03 is a 0.010 mm band). REAM bearing and press-fit bores after printing.

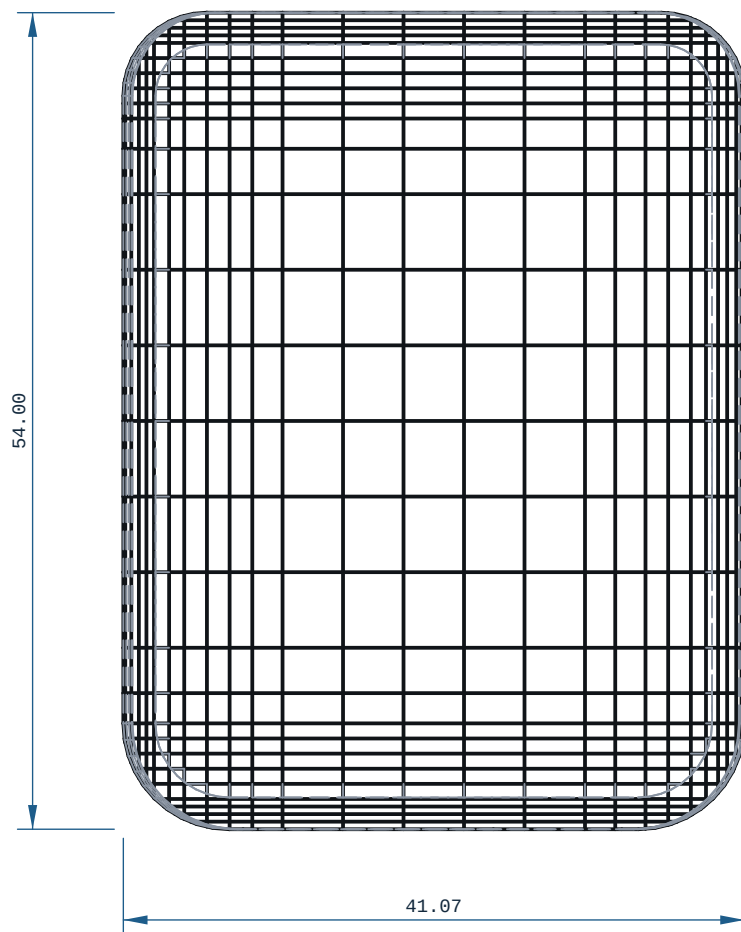


TOP VIEW

X ? Y ?

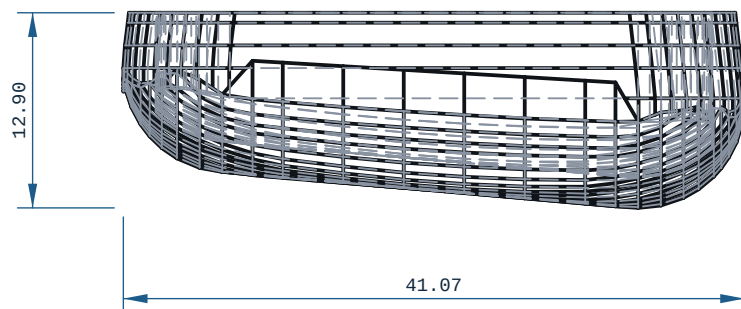

FRONT VIEW

-X ? Z ?

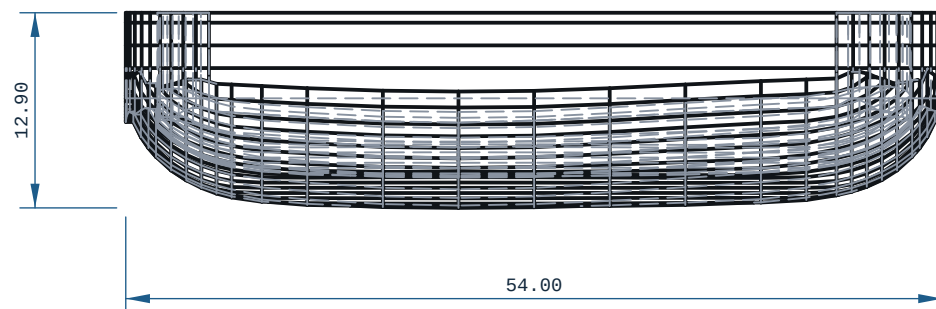

RIGHT VIEW

-Y ? Z ?

MATERIAL		PROCESS	SCALE
TPU		FDM	2:1
CATEGORY	GENERAL TOL	FINISH	SHEET
robot-link	CANNOT DETERMINE ?~	AS PRINTED	A2 1/1
VOLUME (MEASURED)		MASS (ASSUMES TPU)	UNITS
6.26 cm3		7.6 g	mm / deg
SIZE (BBOX, MEASURED)		DRAWN	PROJECTION
41.07 x 54.00 x 12.90		ce-cad 2026-09-03	THIRD ANGLE
SOURCE (DESIGN FILE)			
ce-parts/microduck-sole-left/current/cad/part.py			