



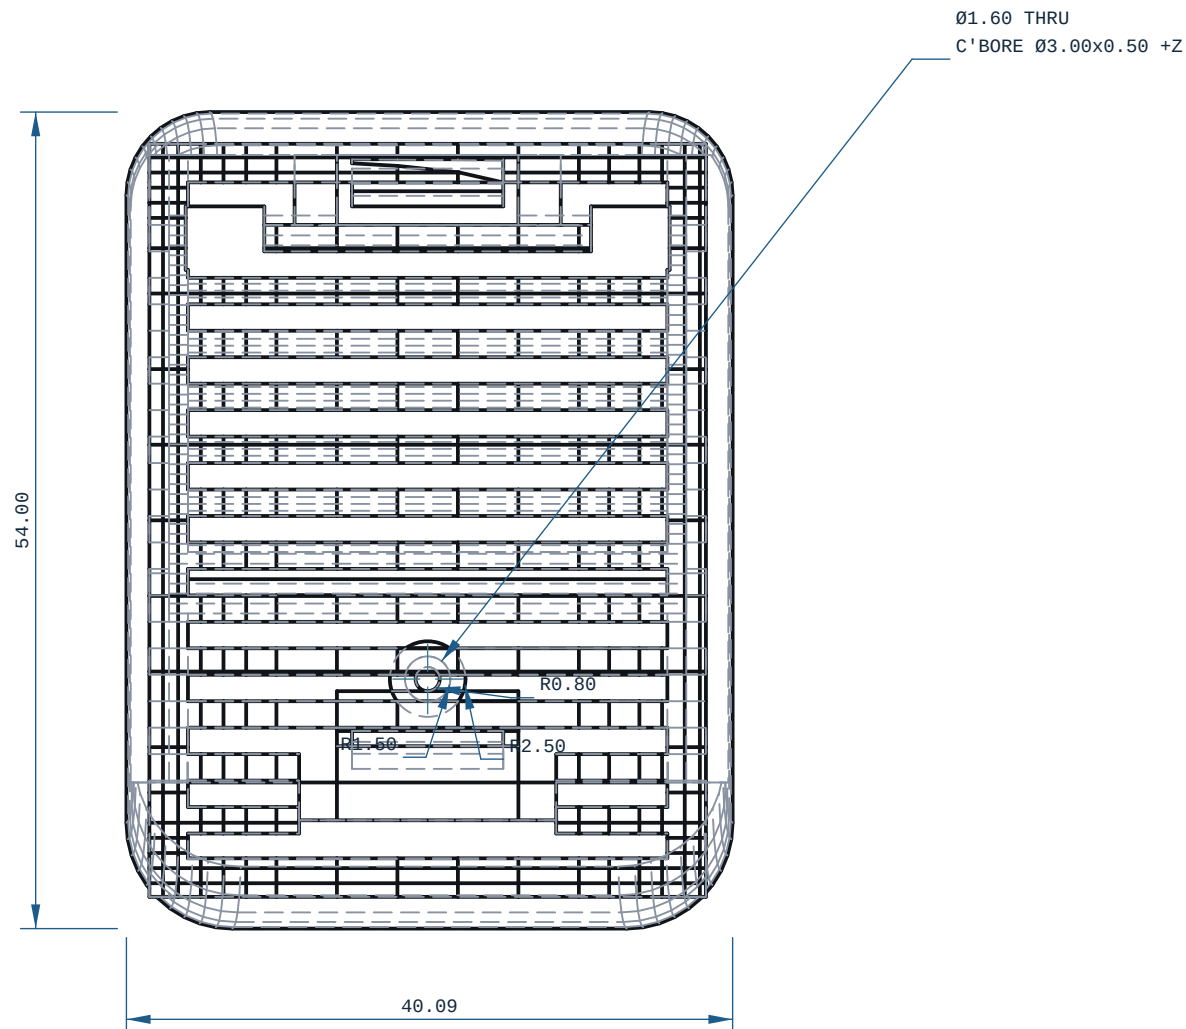


TOP VIEW

X ? Y ?

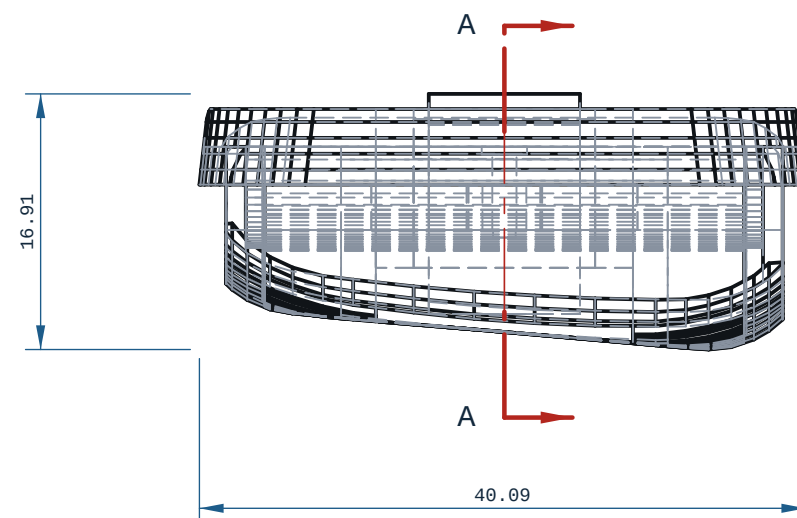


FRONT VIEW

-X ? Z ?

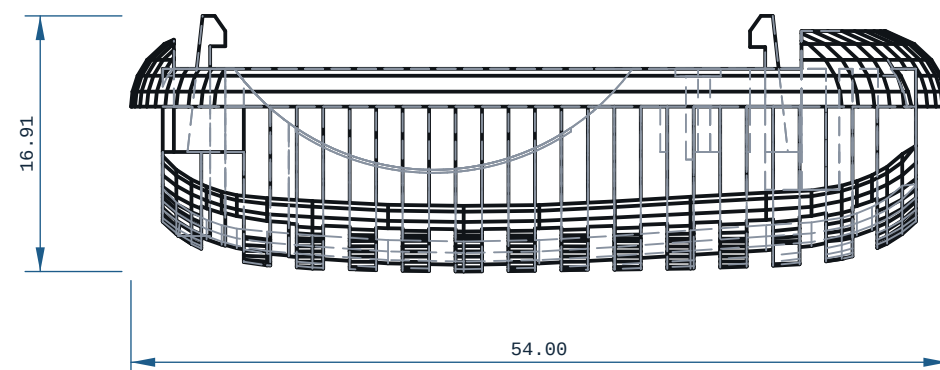


RIGHT VIEW

-Y ? Z ?

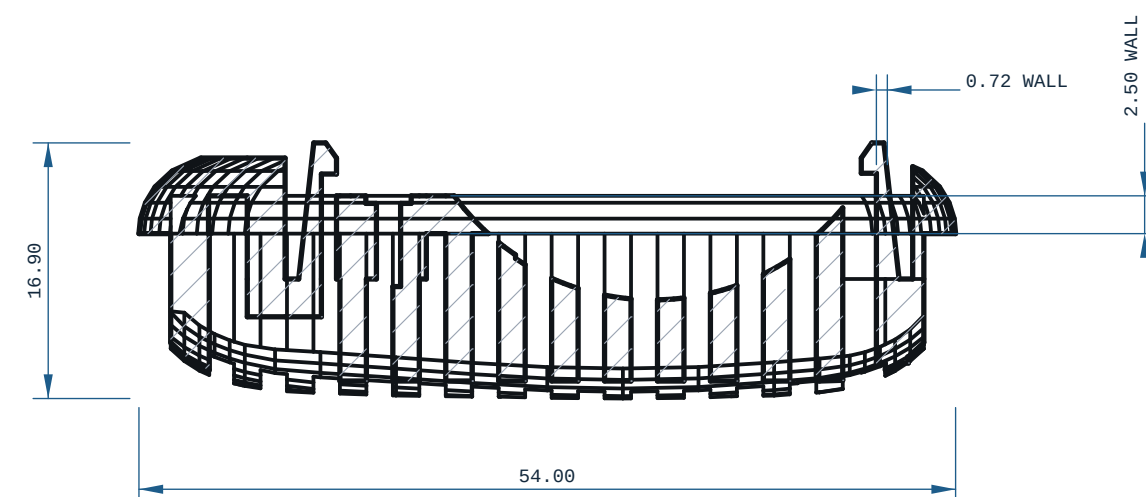

SECTION A-A

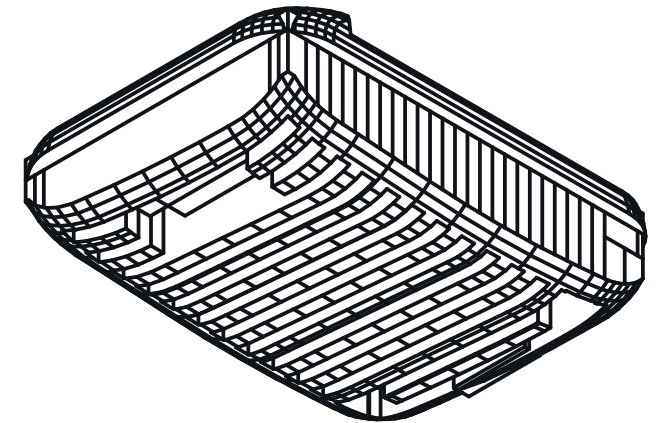

ISOMETRIC VIEW

40.09 x 54.00 x 16.91 mm



REFERENCE RENDER (ISO2) ? rendered off this solid,
900 x 680 px

NOTES

1. ALL DIMENSIONS IN mm AND DEGREES. EVERY DIMENSION AND EVERY HOLE CALLOUT WAS MEASURED OFF THE SOLID.
2. PROCESS: FDM.
3. THINNEST WALL, WHOLE SOLID: 0.0150 mm, AT X=46.400
Y=34.526 Z=-16.651 ? MEASURED OVER THE WHOLE SOLID BY
RAY-EXACT AT 1.477 mm SAMPLE SPACING (A FEATURE
NARROWER THAN THAT CAN BE MISSED). A RAY MINIMUM AT AN
EDGE, A FILLET RUN-OUT OR A CHAMFER TIP IS A REAL
DISTANCE THROUGH MATERIAL AND IS NOT A PRINTABLE WALL.
4. GENERAL TOLERANCE CANNOT DETERMINE ? SEE PRINT / DFM
NOTES UNLESS STATED.
5. SECTION A-A AT X=50.00: THINNEST MATERIAL IN THIS PLANE
ONLY 0.72 mm, AT Y=37.12, Z=-14.38 ? A SCAN OF ONE CUT,
NOT THE PART MINIMUM.
6. FRONT VIEW: hidden lines KEPT: without them 3 of 2745
edge samples have no ink within 0.35 mm (worst 0.458
mm) and the feature would be missing from the sheet.
7. TOP VIEW: hidden lines KEPT: without them 218 of 2952
edge samples have no ink within 0.35 mm (worst 1.029
mm) and the feature would be missing from the sheet.
8. RIGHT VIEW: hidden lines KEPT: without them 27 of 2759
edge samples have no ink within 0.35 mm (worst 0.721
mm) and the feature would be missing from the sheet.

PRINT / DFM

1. ORIENTATION: laid flat (40 x 54 x 17 mm)
2. THINNESS WALL: 0.01 mm (floor 0.88 mm = 2 perimeters @ 0.4 mm nozzle)
3. SMALL HOLES 1/160 PRINT UNDERSIZE: drill to tapping size and form-tap after printing; heat-set inserts for M2 into PLA
4. FILAMENT: PLA, ~14 g (modelled), 85 layers @ 0.2 mm
5. TOLERANCE BASIS, IN-HOUSE: CANNOT DETERMINE. Every Bambu on this farm records tolerance_mm: null, cite "no coupon printed and measured on this machine" (ce-machines/bambu-h2s-*, bambu-h2d-*/capabilities.json, read 2026-09-02), and Bambu Lab's own H2D Pro spec sheet carries no dimensional-accuracy line. DIMENSIONS HERE ARE NOMINAL AS MODELLED.
6. TOLERANCE BASIS, OUTSOURCED: JLC3DP +/-0.3 mm FDM (jlc3dp.com, ce-machines/farm-jlc3dp/; Hubs +/-0.5%, floor +/-0.5 mm (hubs.com/3d-printing/, ce-machines/farm-hubs). Apply the route's figure, not both. The +/-0.2 mm in cecad/machining.py fdm is a repo planning constant with no vendor cite and IS NOT used here. One printed and measured coupon closes this note.
7. NO ISO 286 CLASS IS DECLARED ON ANY BORE: FDM cannot be sized to one (H7/p6 at 03 is a 0.010 mm band). REAM bearing and press-fit bores after printing.

MICRODUC - FOOT - LEFT			REV A
MATERIAL PLA		PROCESS FDM	SCALE 2:1
CATEGORY robot-link	GENERAL TOL CANNOT DETERMINE ?~	FINISH AS PRINTED	SHEET A2 1/1
VOLUME (MEASURED) 11.74 cm3		MASS (ASSUMES PLA) 14.6 g	UNITS mm / deg
SIZE (BBOX, MEASURED) 40.09 x 54.00 x 16.91		DRAWN ce-cad 2026-09-03	PROJECTION THIRD ANGLE
SOURCE (DESIGN FILE) ce-parts/microduck-foot-left/current/cad/part.py			