



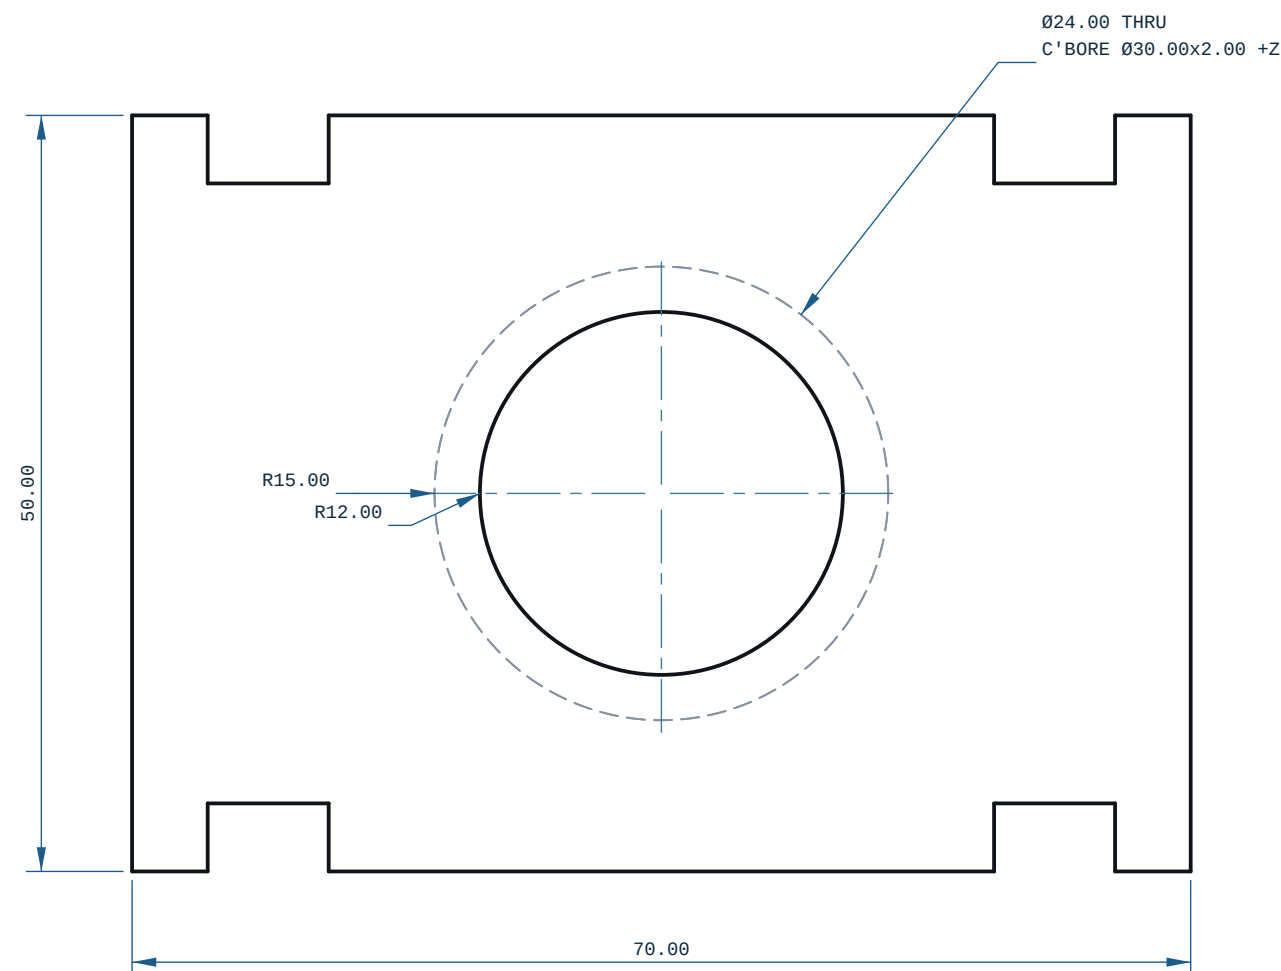


TOP VIEW

X ? Y ?

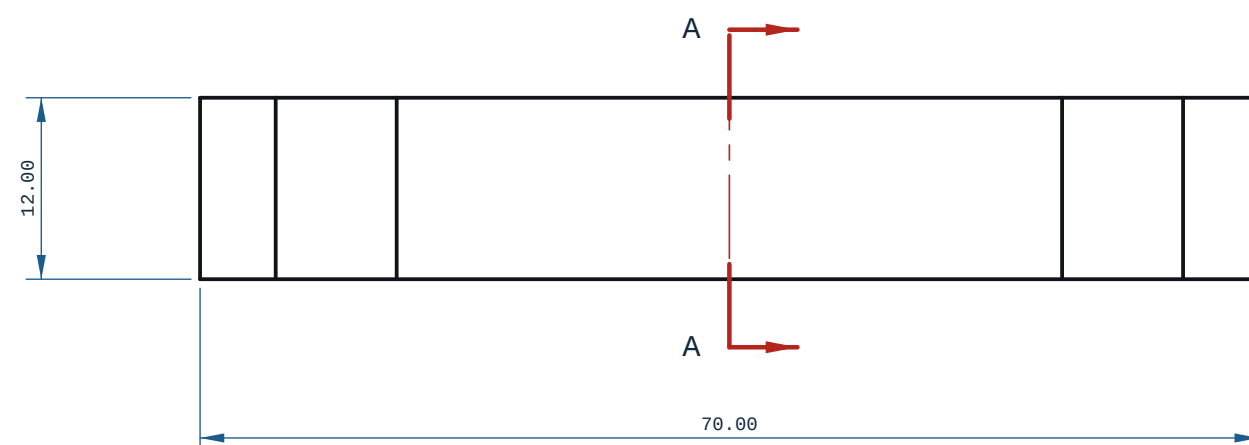


FRONT VIEW

-X ? Z ?

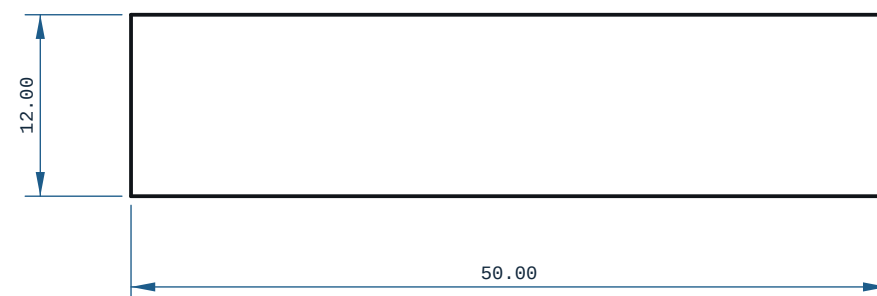


RIGHT VIEW

-Y ? Z ?

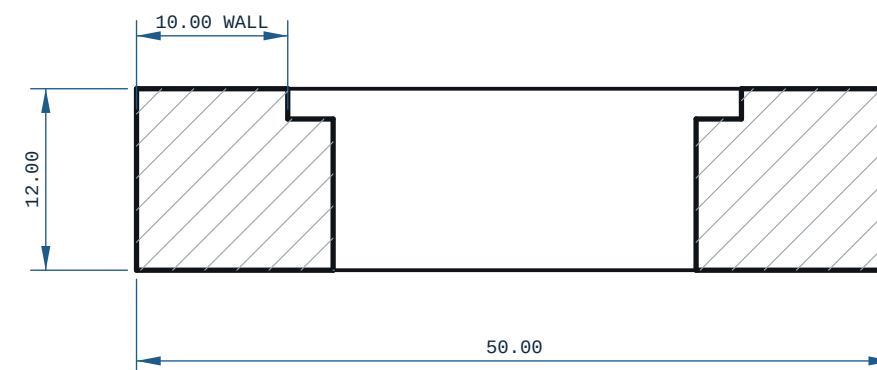

SECTION A-A

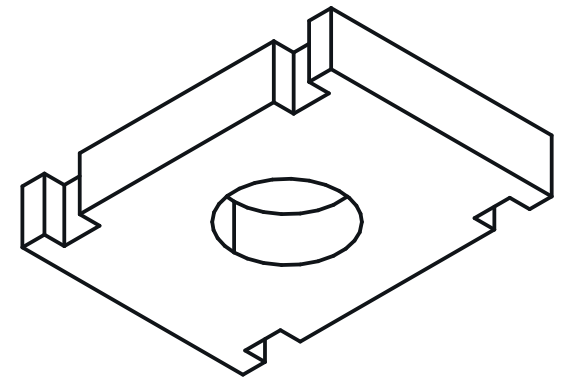

ISOMETRIC VIEW

70.00 x 50.00 x 12.00 mm

NOTES

1. ALL DIMENSIONS IN MM AND DEGREES. EVERY DIMENSION AND EVERY HOLE CALLOUT WAS MEASURED OFF THE SOLID.
2. THINNEST WALL, WHOLE SOLID (RAY MINIMUM): 5.0000 mm, AT X=-35.000 Y=-20.833 Z=5.000 ? MEASURED OVER THE WHOLE SOLID BY RAY=EXACT AT 1.2950 mm SAMPLE SPACING (A FEATURE NARROWER THAN THAT CAN BE MISSED). THIS IS A DISTANCE THROUGH MATERIAL, NOT A WALL: AT AN EDGE, A FILLET RUN-OUT OR A CHAMFER TIP IT IS REAL AND UNPRINTABLE BY DEFINITION. DO NOT JUDGE PRINTABILITY BY IT ? THE NEXT NOTE IS THE ONE THAT DOES.
3. PRINTABLE MINIMUM WALL: CANNOT DETERMINE ? no ray fired into this solid came back out of a wall within 4.000 mm ? every wall on it is thicker than the cap, or it is not a closed solid. MEASURED AS THE SMALLEST MEDIAN WALL OVER A NEIGHBOURHOOD OF 0 ? (>= ? SAMPLES), RAYS CAPPED AT 4.000 mm, BY cecad.inspect.printable_wall_detail. WHAT SETTLES IT: a printed and sectioned coupon of the thinnest feature.
4. GENERAL TOLERANCE: CANNOT DETERMINE ? THIS PART DECLARES NO PROCESS THIS REPO CAN READ.
5. SECTION A-A AT X=0.00: THINNEST MATERIAL IN THIS PLANE ONLY 10.00 mm, AT Y=-20.00, Z=10.05 ? A SCAN OF ONE CUT, NOT THE PART MINIMUM.
6. FRONT VIEW: hidden lines SUPPRESSED: all 311 edge samples still land on drawn ink without them.
7. TOP VIEW: hidden lines KEPT: without them 5 of 320 edge samples have no ink within 0.35 mm (worst 3.000 mm) and the feature would be missing from the sheet.
8. RIGHT VIEW: hidden lines SUPPRESSED: all 271 edge samples still land on drawn ink without them.

PRINT / DFM

1. ORIENTATION: laid flat (70 x 50 x 12 mm)
2. THINNEST WALL, WHOLE SOLID (RAY MINIMUM):
5.0000 mm : a distance through material, NOT a printable wall where it falls on an edge, a fillet run-out or a chamfer tip. Printability is judged on the next line.
3. PRINTABLE MINIMUM WALL: CANNOT DETERMINE ? no ray fired into this solid came back out of a wall within 4.000 mm ? every wall on it is thicker than the cap, or it is not a closed solid. Floor is 0.8000 mm (2 perimeters @ 0.4 mm nozzle, cecad/printed.py:801). What settles it: a printed and sectioned coupon of the thinnest feature.
4. FILAMENT: PLA, ~15 g (modelled), 60 layers @ 0.2 mm

MATERIAL		PROCESS	SCALE
PLA		-	2:1
CATEGORY	GENERAL TOL	FINISH	SHEET
-	SEE NOTES	AS PRINTED	A2 1/1
VOLUME (MEASURED)		MASS (ASSUMES PLA)	UNITS
34.33 cm3		42.6 g	mm / deg
SIZE (BBOX, MEASURED)		DRAWN	PROJECTION
70.00 x 50.00 x 12.00		ce-cad 2026-09-03	THIRD ANGLE
SOURCE (DESIGN FILE)			
tools/jigs.py			