




- NOTES
1. ALL DIMENSIONS IN mm AND DEGREES. EVERY DIMENSION AND EVERY HOLE CALLOUT WAS MEASURED OFF THE SOLID.
 2. THINNEST WALL, WHOLE SOLID: 0.5500 mm, AT X=-5.197 Y=-0.130 Z=0.166 ? MEASURED OVER THE WHOLE SOLID BY RAY+EXACT AT 0.601 mm SAMPLE SPACING (A FEATURE NARROWER THAN THAT CAN BE MISSED). A RAY MINIMUM AT AN EDGE, A FILLET RUN-OUT OR A CHAMFER TIP IS A REAL DISTANCE THROUGH MATERIAL AND IS NOT A PRINTABLE WALL.
 3. GENERAL TOLERANCE: CANNOT DETERMINE ? THIS PART DECLARES NO PROCESS THIS REPO CAN READ.
 4. SECTION A-A AT X=0.00: THINNEST MATERIAL IN THIS PLANE ONLY 0.55 mm, AT Y=5.48, Z=0.97 ? A SCAN OF ONE CUT, NOT THE PART MINIMUM.

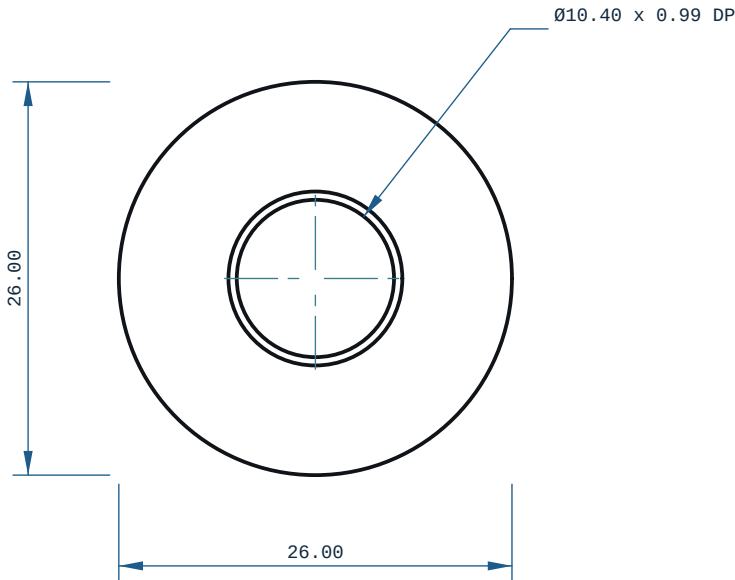


TOP VIEW
X ? Y ?

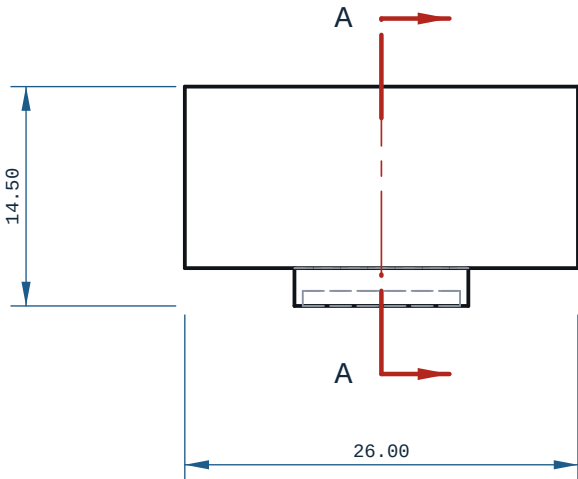

FRONT VIEW
-X ? Z ?

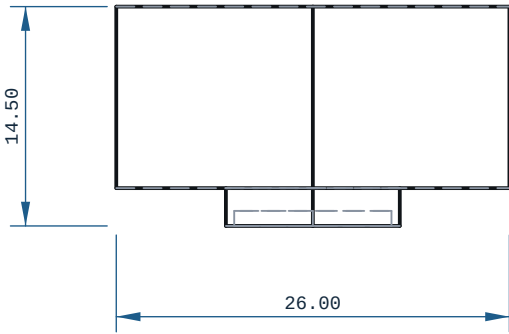

RIGHT VIEW
-Y ? Z ?

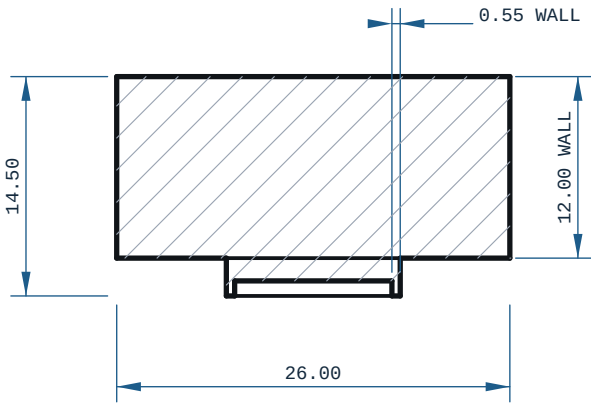

SECTION A-A

MICRODUCK - JIG - PRESS - 15 - INNER



REV

A

MATERIAL		PROCESS	SCALE
PLA		-	2:1
CATEGORY	GENERAL TOL	FINISH	SHEET
-	SEE NOTES	AS PRINTED	A3 1/1
VOLUME (MEASURED)		MASS (ASSUMES PLA)	UNITS
6.55 cm3		8.1 g	mm / deg
SIZE (BBOX, MEASURED)		DRAWN	PROJECTION
26.00 x 26.00 x 14.50		ce-cad 2026-09-02	THIRD ANGLE
SOURCE (DESIGN FILE)			
tools/jigs.py			