




- NOTES
- 1. ALL DIMENSIONS IN mm AND DEGREES. EVERY DIMENSION AND EVERY HOLE CALLOUT WAS MEASURED OFF THE SOLID.
 - 2. THINNEST WALL, WHOLE SOLID: 1.3500 mm, AT X=0.737 Y=-7.361 Z=1.000 ? MEASURED OVER THE WHOLE SOLID BY RAY+EXACT AT 0.669 mm SAMPLE SPACING (A FEATURE NARROWER THAN THAT CAN BE MISSED). A RAY MINIMUM AT AN EDGE, A FILLET RUN-OUT OR A CHAMFER TIP IS A REAL DISTANCE THROUGH MATERIAL AND IS NOT A PRINTABLE WALL.
 - 3. GENERAL TOLERANCE: CANNOT DETERMINE ? THIS PART DECLARES NO PROCESS THIS REPO CAN READ.
 - 4. SECTION A-A AT X=0.00: THINNEST MATERIAL IN THIS PLANE ONLY 1.35 mm, AT Y=-6.72, Z=0.18 ? A SCAN OF ONE CUT, NOT THE PART MINIMUM.

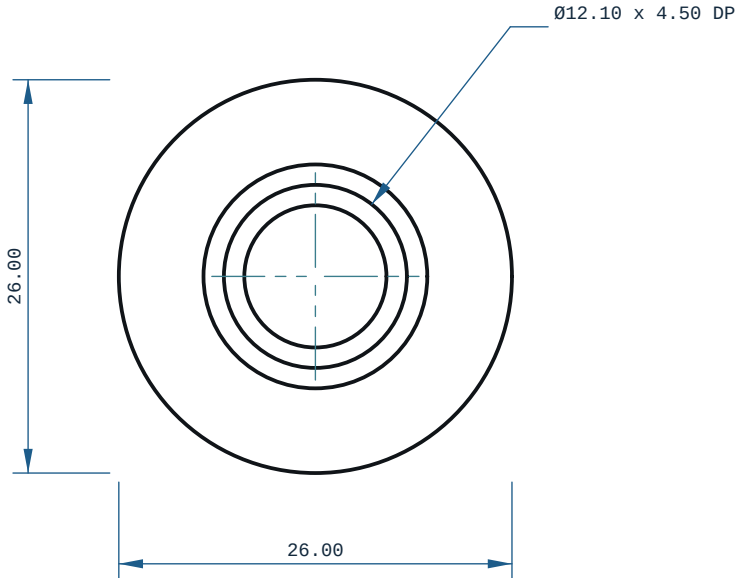


TOP VIEW
X ? Y ?

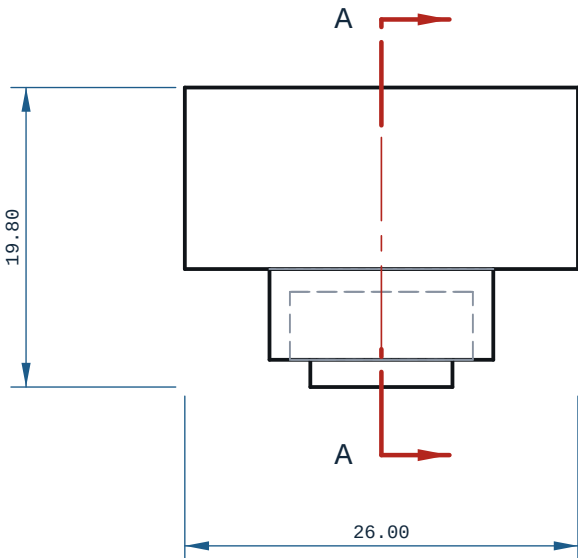

FRONT VIEW
-X ? Z ?

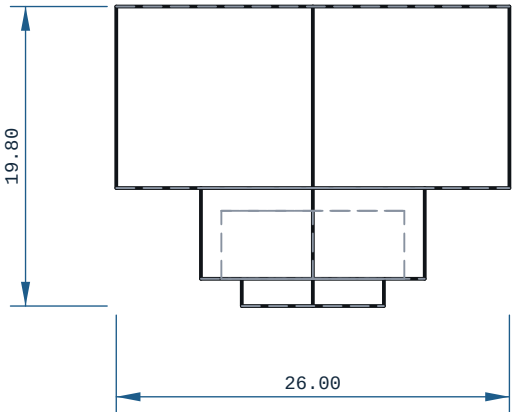

RIGHT VIEW
-Y ? Z ?

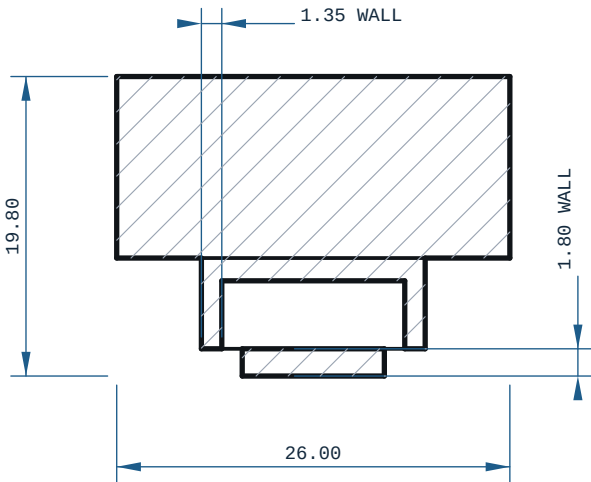

SECTION A-A

MICRODUCK - JIG - PRESS - 15 - OUTER



REV

A

MATERIAL		PROCESS	SCALE
PLA		-	2:1
CATEGORY	GENERAL TOL	FINISH	SHEET
-	SEE NOTES	AS PRINTED	A3 1/1
VOLUME (MEASURED)		MASS (ASSUMES PLA)	UNITS
7.01 cm3		8.7 g	mm / deg
SIZE (BBOX, MEASURED)		DRAWN	PROJECTION
26.00 x 26.00 x 19.80		ce-cad 2026-09-02	THIRD ANGLE
SOURCE (DESIGN FILE)			
tools/jigs.py			