

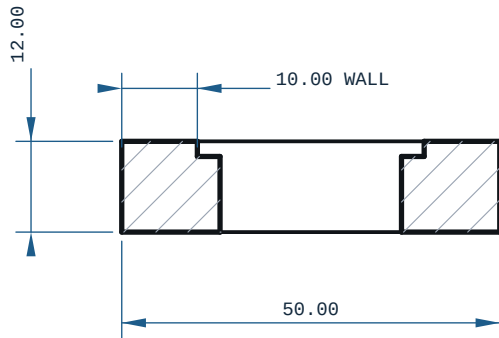
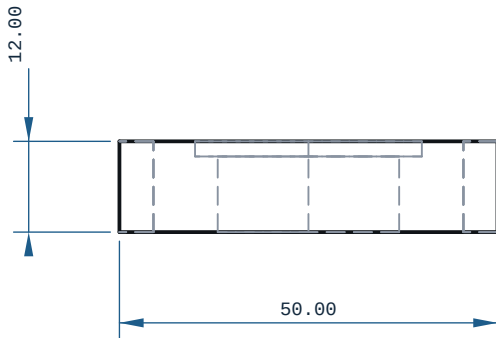


- NOTES
- 1. ALL DIMENSIONS IN mm AND DEGREES. EVERY DIMENSION AND EVERY HOLE CALLOUT WAS MEASURED OFF THE SOLID.
 - 2. THINNEST WALL, WHOLE SOLID: 5.0000 mm, AT X=-35.000 Y=-20.833 Z=5.000 ? MEASURED OVER THE WHOLE SOLID BY RAY+EXACT AT 1.295 mm SAMPLE SPACING (A FEATURE NARROWER THAN THAT CAN BE MISSED). A RAY MINIMUM AT AN EDGE, A FILLET RUN-OUT OR A CHAMFER TIP IS A REAL DISTANCE THROUGH MATERIAL AND IS NOT A PRINTABLE WALL.
 - 3. GENERAL TOLERANCE: CANNOT DETERMINE ? THIS PART DECLARES NO PROCESS THIS REPO CAN READ.
 - 4. SECTION A-A AT X=0.00: THINNEST MATERIAL IN THIS PLANE ONLY 10.00 mm, AT Y=-20.00, Z=10.05 ? A SCAN OF ONE CUT, NOT THE PART MINIMUM.

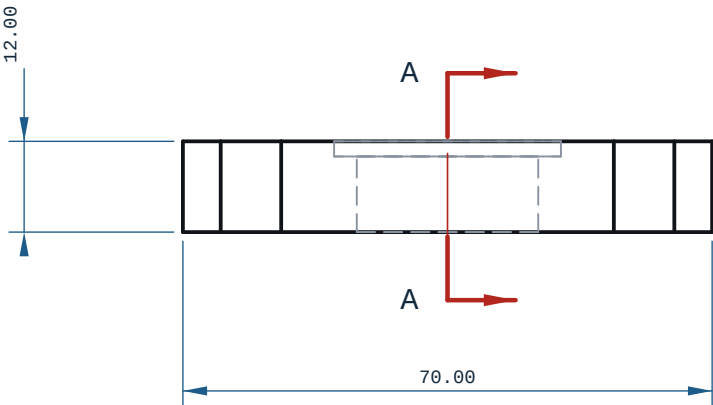

MICRODUCK - JIG - PRESS - ANVIL

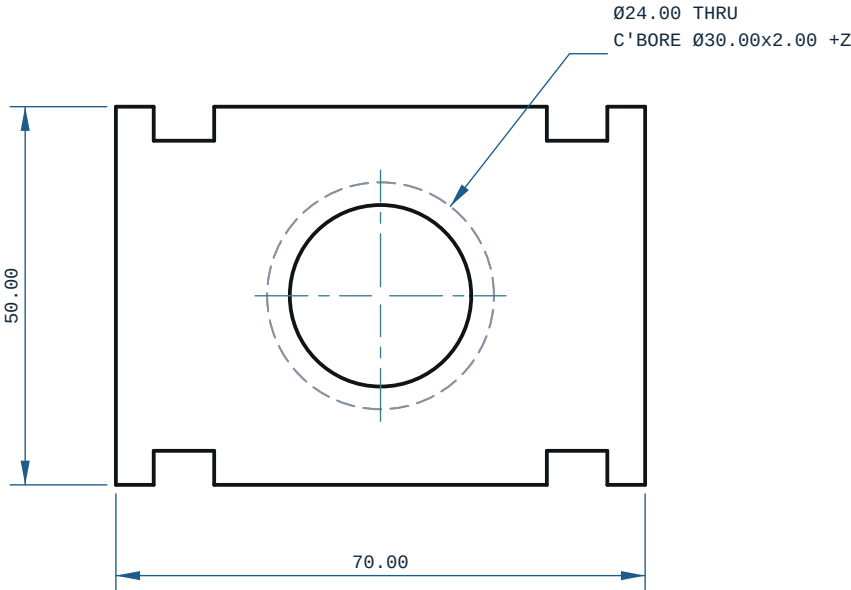

REV

A

MATERIAL		PROCESS	SCALE
PLA		-	1:1
CATEGORY	GENERAL TOL	FINISH	SHEET
-	SEE NOTES	AS PRINTED	A3 1/1
VOLUME (MEASURED)		MASS (ASSUMES PLA)	UNITS
34.33 cm3		42.6 g	mm / deg
SIZE (BBOX, MEASURED)		DRAWN	PROJECTION
70.00 x 50.00 x 12.00		ce-cad 2026-09-02	THIRD ANGLE
SOURCE (DESIGN FILE)			
tools/jigs.py			