




ISOMETRIC VIEW

57.00 x 36.00 x 3.00 mm

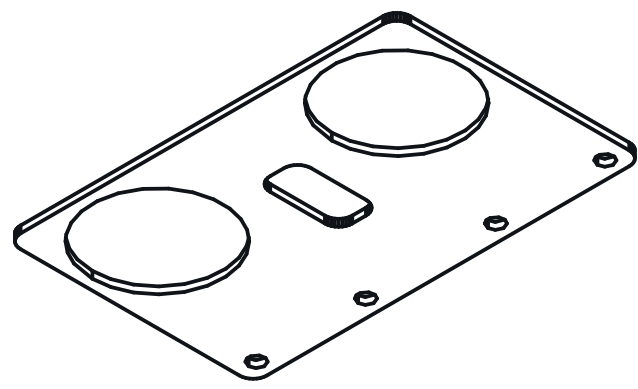

REFERENCE RENDER (1002) ? rendered off this solid,
900 x 600 px

HOLE TABLE ? 6 POSITIONS

TAG	SIZE	X	Y	C'BORE
A1	Ø2.30 THRU	-25.50	20.50	-
A2	Ø2.30 THRU	-9.50	20.50	-
A3	Ø2.30 THRU	9.50	20.50	-
A4	Ø2.30 THRU	25.50	20.50	-
A5	Ø19.00 THRU	-17.50	-2.00	-
A6	Ø19.00 THRU	17.50	-2.00	-


every row measured off the solid; positions are model
coordinates, mm. C'BORE side is the face it opens on.

NOTES

1. ALL DIMENSIONS IN mm AND DEGREES. EVERY DIMENSION AND EVERY HOLE CALLOUT WAS MEASURED OFF THE SOLID.
2. PROCESS: FDM.
3. THINNEST WALL, WHOLE SOLID: 1.0000 mm, AT X=-27.402 Y=-6.999 Z=10.500 ? MEASURED OVER THE WHOLE SOLID BY RAY=EXACT AT 1.409 mm SAMPLE SPACING (A FEATURE NARROWER THAN THAT CAN BE MISSED). A RAY MINIMUM AT AN EDGE, A FILLET RUN-OUT OR A CHAMFER TIP IS A REAL DISTANCE THROUGH MATERIAL AND IS NOT A PRINTABLE WALL.
4. GENERAL TOLERANCE CANNOT DETERMINE ? SEE PRINT / DFM
5. SECTION A-A AT Y=20.50: THINNEST MATERIAL IN THIS PLANE ONLY 1.00 mm, AT X=-28.02, Z=17.00 ? A SCAN OF ONE CUT, NOT THE PART MINIMUM.


PRINT / DFM

1. ORIENTATION: laid flat (57 x 36 x 3 mm)
2. THINNEST WALL: 1.00 mm (floor 0.80 mm = 2 perimeters @ 0.4 mm nozzle)
3. FILAMENT: PLA, ~2 g (modelled), 15 layers @ 0.2 mm
4. TOLERANCE BASIS (IN-HOUSE): CANNOT DETERMINE. Every Bambu machine on this farm records tolerance_mm: null with the cite "no coupon printed and measured on this machine" (ce-machines/bambu-h2s-*/capabilities.json, ce-machines/bambu-h2s-*/capabilities.json, read 2026-09-02), and Bambu Lab's own H20 Pro technical specification carries no dimensional-accuracy line at all. Dimensions on this sheet are NOMINAL AS MODELLED.
5. TOLERANCE BASIS (OUTSOURCED): JLC3DP publishes +/-0.3 mm for FDM (jlc3dp.com, ce-machines/farm-jlc3dp/capabilities.json) and Hubs publishes +/-0.5% with a +/-0.5 mm floor (hubs.com/3d-printing/, ce-machines/farm-hubs/capabilities.json). Quote whichever route makes the part; do not apply both.
6. THE +/-0.2 mm IN cecad/machining.py PROCESSES(['fdm']).tolerance_mm IS A REPO PLANNING CONSTANT WITH NO VENDOR CITE and is deliberately not used as this sheet's general tolerance. One printed and measured calibration coupon on the machine that will make this part closes this note.
7. FITS: no bore on this part carries a declared ISO 286 class, because FDM cannot be sized to one ? H7/p6 at 03 is a 0.010 mm band against a process nobody here has measured. Bearing and press-fit bores are called out to REAM AFTER PRINTING in the note above.

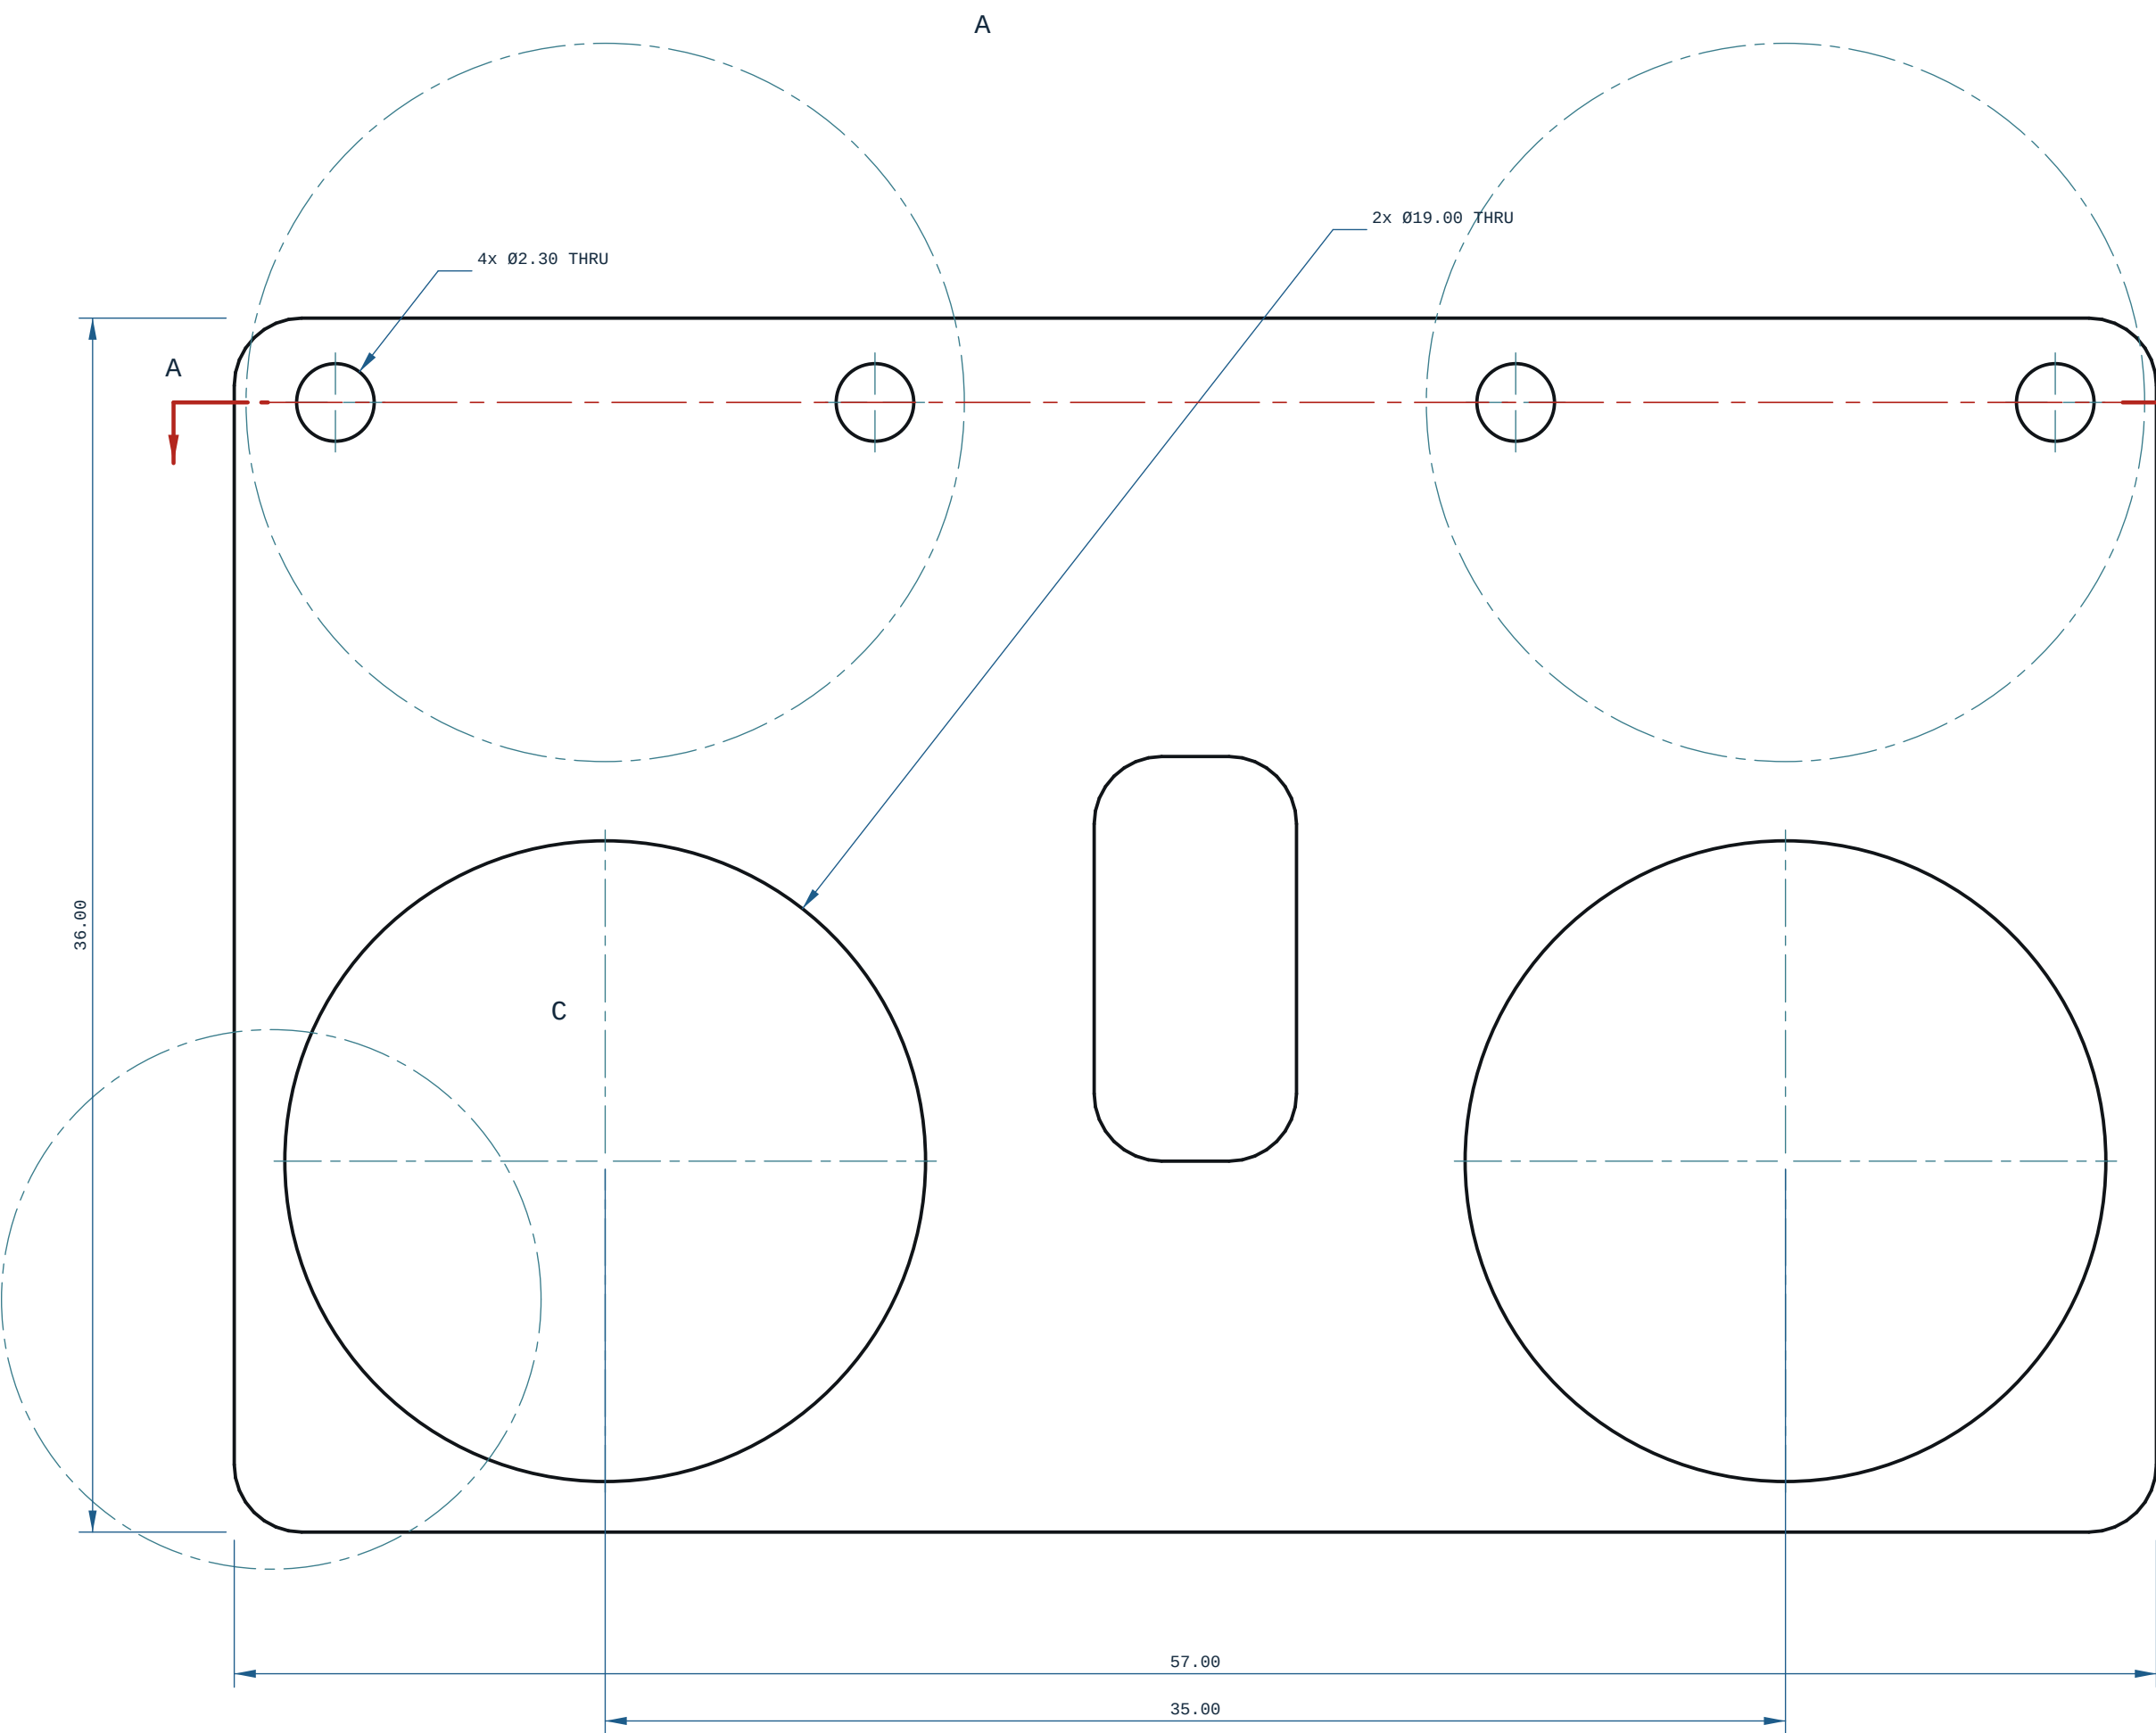


TOP VIEW

X ? Y ?

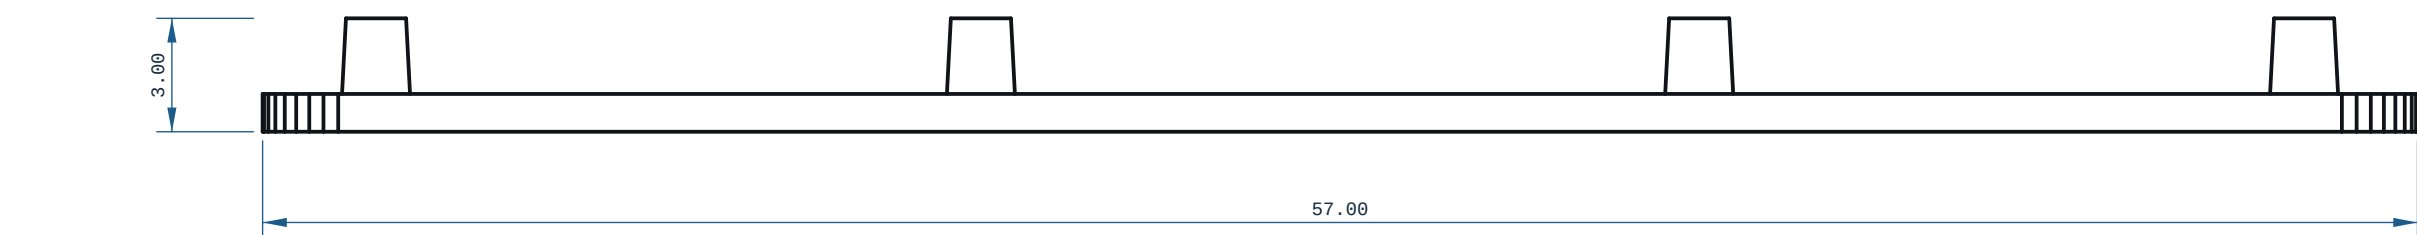


FRONT VIEW

-X ? Z ?

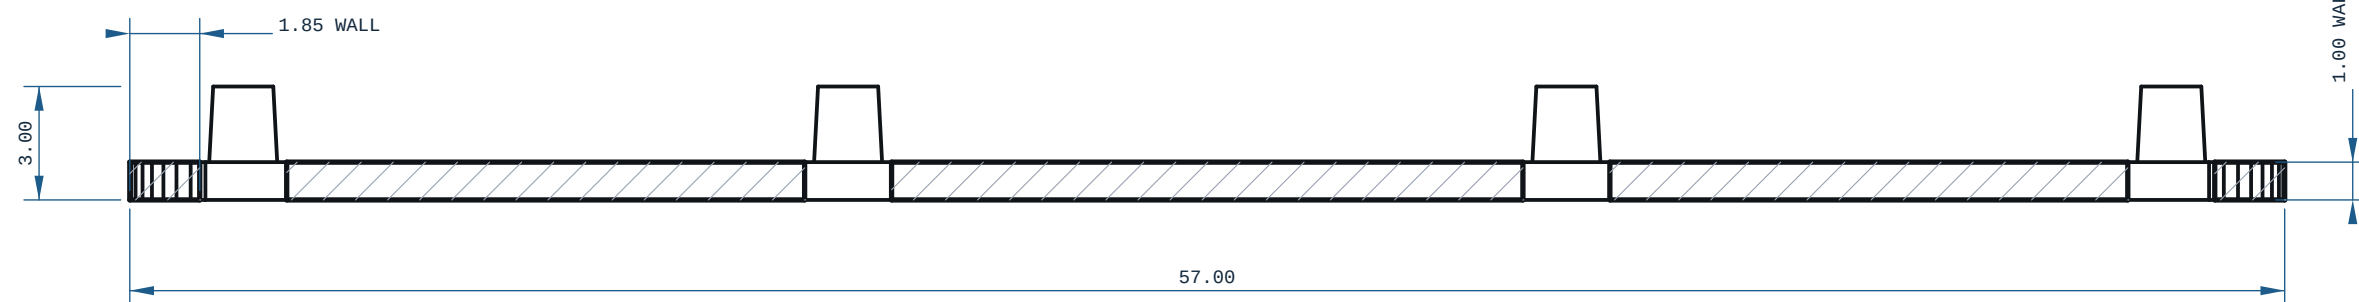


SECTION A-A


SCALE 5:1
DETAIL C

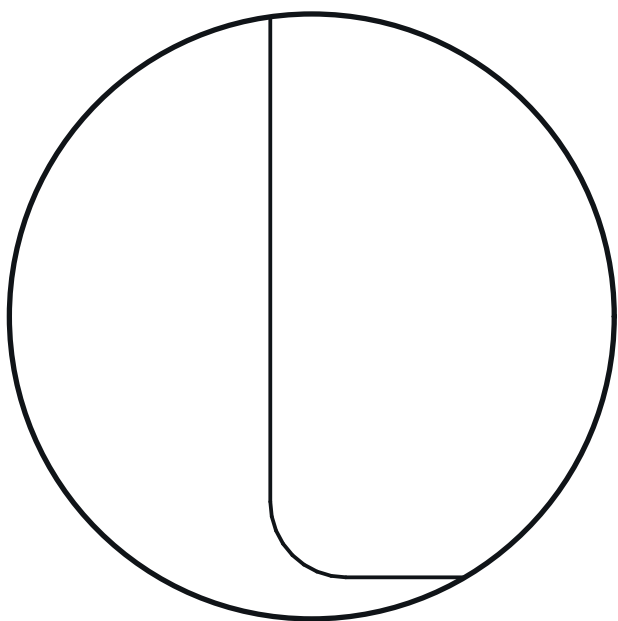

SCALE 2:1
DETAIL A



SCALE 2:1
DETAIL B



MICRODUCK - TRUNK - BASE



REV
A

MATERIAL PLA		PROCESS FDM	SCALE 5:1
CATEGORY plate	GENERAL TOL CANNOT DETERMINE ?~	FINISH AS PRINTED	SHEET A1 1/1
VOLUME (MEASURED) 1.41 cm3	MASS (ASSUMES PLA) 1.8 g		UNITS mm / deg
SIZE (BOX, MEASURED) 57.00 x 36.00 x 3.00	DRAWN ce-cad	2026-09-02	PROJECTION THIRD ANGLE
SOURCE (DESIGN FILE) ce-parts/microduck-trunk-base/current/cad/part.py			