



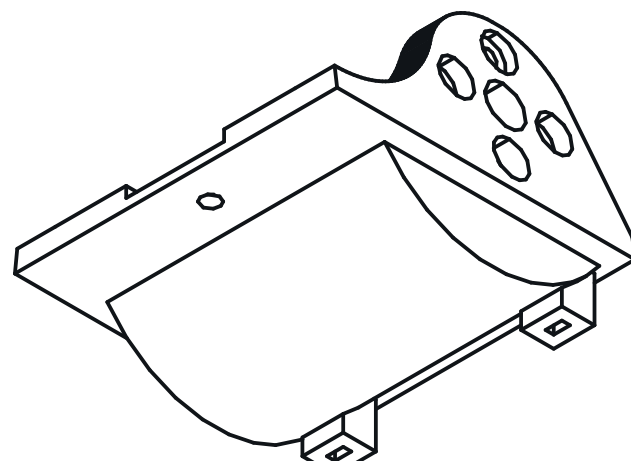

ISOMETRIC VIEW

39.49 x 36.50 x 25.50 mm



REFERENCE RENDER (100%) ? rendered off this solid,
900 x 600 px

HOLE TABLE ? 6 POSITIONS

TAG	SIZE	Y	Z	C'BORE
A1	Ø2.20 THRU	22.00	-0.22	Ø4.40x1.40 -X
A2	Ø2.20 THRU	20.00	-6.22	Ø4.40x2.15 +X
A3	Ø5.00 THRU	22.00	-6.22	-
A4	Ø14.00 THRU	22.00	-6.22	Ø15.00x2.30 +X
A5	Ø2.20 THRU	16.00	-6.22	Ø4.40x2.15 +X
A6	Ø2.20 THRU	22.00	-12.22	Ø4.40x2.90 +X


every row measured off the solid; positions are model coordinates, mm. C'BORE side is the face it opens on.

NOTES

1. ALL DIMENSIONS IN mm AND DEGREES. EVERY DIMENSION AND EVERY HOLE CALLOUT WAS MEASURED OFF THE SOLID.
2. PROCESS: FDM.
3. THINNEST WALL, WHOLE SOLID: 0.2340 mm, AT X=-32.500 Y=22.500 Z=0.017 ? MEASURED OVER THE WHOLE SOLID BY RAY=EXACT AT 1.700 mm SAMPLE SPACING (A FEATURE NARROWER THAN THAT CAN BE MISSED). A RAY MINIMUM AT AN EDGE, A FILLET RUN-OUT OR A CHAMFER TIP IS A REAL DISTANCE THROUGH MATERIAL AND IS NOT A PRINTABLE WALL.
4. GENERAL TOLERANCE CANNOT DETERMINE ? SEE PRINT / DFM NOTES UNLESS STATED.
5. SECTION A-A AT Y=22.00: THINNEST MATERIAL IN THIS PLANE ONLY 1.00 mm, AT X=-66.56, Z=2.48 ? A SCAN OF ONE CUT, NOT THE PART MINIMUM.
6. FRONT VIEW: hidden lines KEPT: without them 12 of 830 edge samples have no ink within 0.35 mm (worst 2.566 mm) and the feature would be missing from the sheet.
7. TOP VIEW: hidden lines KEPT: without them 566 of 806 edge samples have no ink within 0.35 mm (worst 4.297 mm) and the feature would be missing from the sheet.
8. RIGHT VIEW: hidden lines KEPT: without them 6 of 801 edge samples have no ink within 0.35 mm (worst 1.200 mm) and the feature would be missing from the sheet.


PRINT / DFM

1. ORIENTATION: laid flat (39 x 36 x 26 mm)
2. THINNEST WALL: 0.23 mm (floor 0.80 mm = 2 perimeters @ 0.4 mm nozzle)
3. 11 horizontal bore(s) bridge at the crown: ream any bearing or press-fit bore to size
4. FILAMENT: PLA, ~6 g (modelled), 120 layers @ 0.2 mm
5. TOLERANCE BASIS, IN-HOUSE: CANNOT DETERMINE. Every Bambu on this farm records tolerance_mm: null, cite "no coupon printed and measured on this machine" (ce-machines/bambu-h2s-*, bambu-h2s-*/capabilities.json, read 2026-09-02), and Bambu Lab's own H2D Pro spec sheet carries no dimensional-accuracy line. DIMENSIONS HERE ARE NOMINAL AS MODELLED.
6. TOLERANCE BASIS, OUTSOURCED: JLC3DP +/-0.3 mm FDM (jlc3dp.com, ce-machines/farm-jlc3dp); Hubs +/-0.5%, floor +/-0.5 mm (hubs.com/3d-printing/, ce-machines/farm-hubs). Apply the route's figure, not both. The +/-0.2 mm in cecad/machining.py fdm is a repo planning constant with no vendor cite and is NOT used here. One printed and measured coupon closes this note.
7. NO ISO 286 CLASS IS DECLARED ON ANY BORE: FDM cannot be sized to one (WTP6 at 02 is a 0.010 mm band). REAM bearing and press-fit bores after printing.

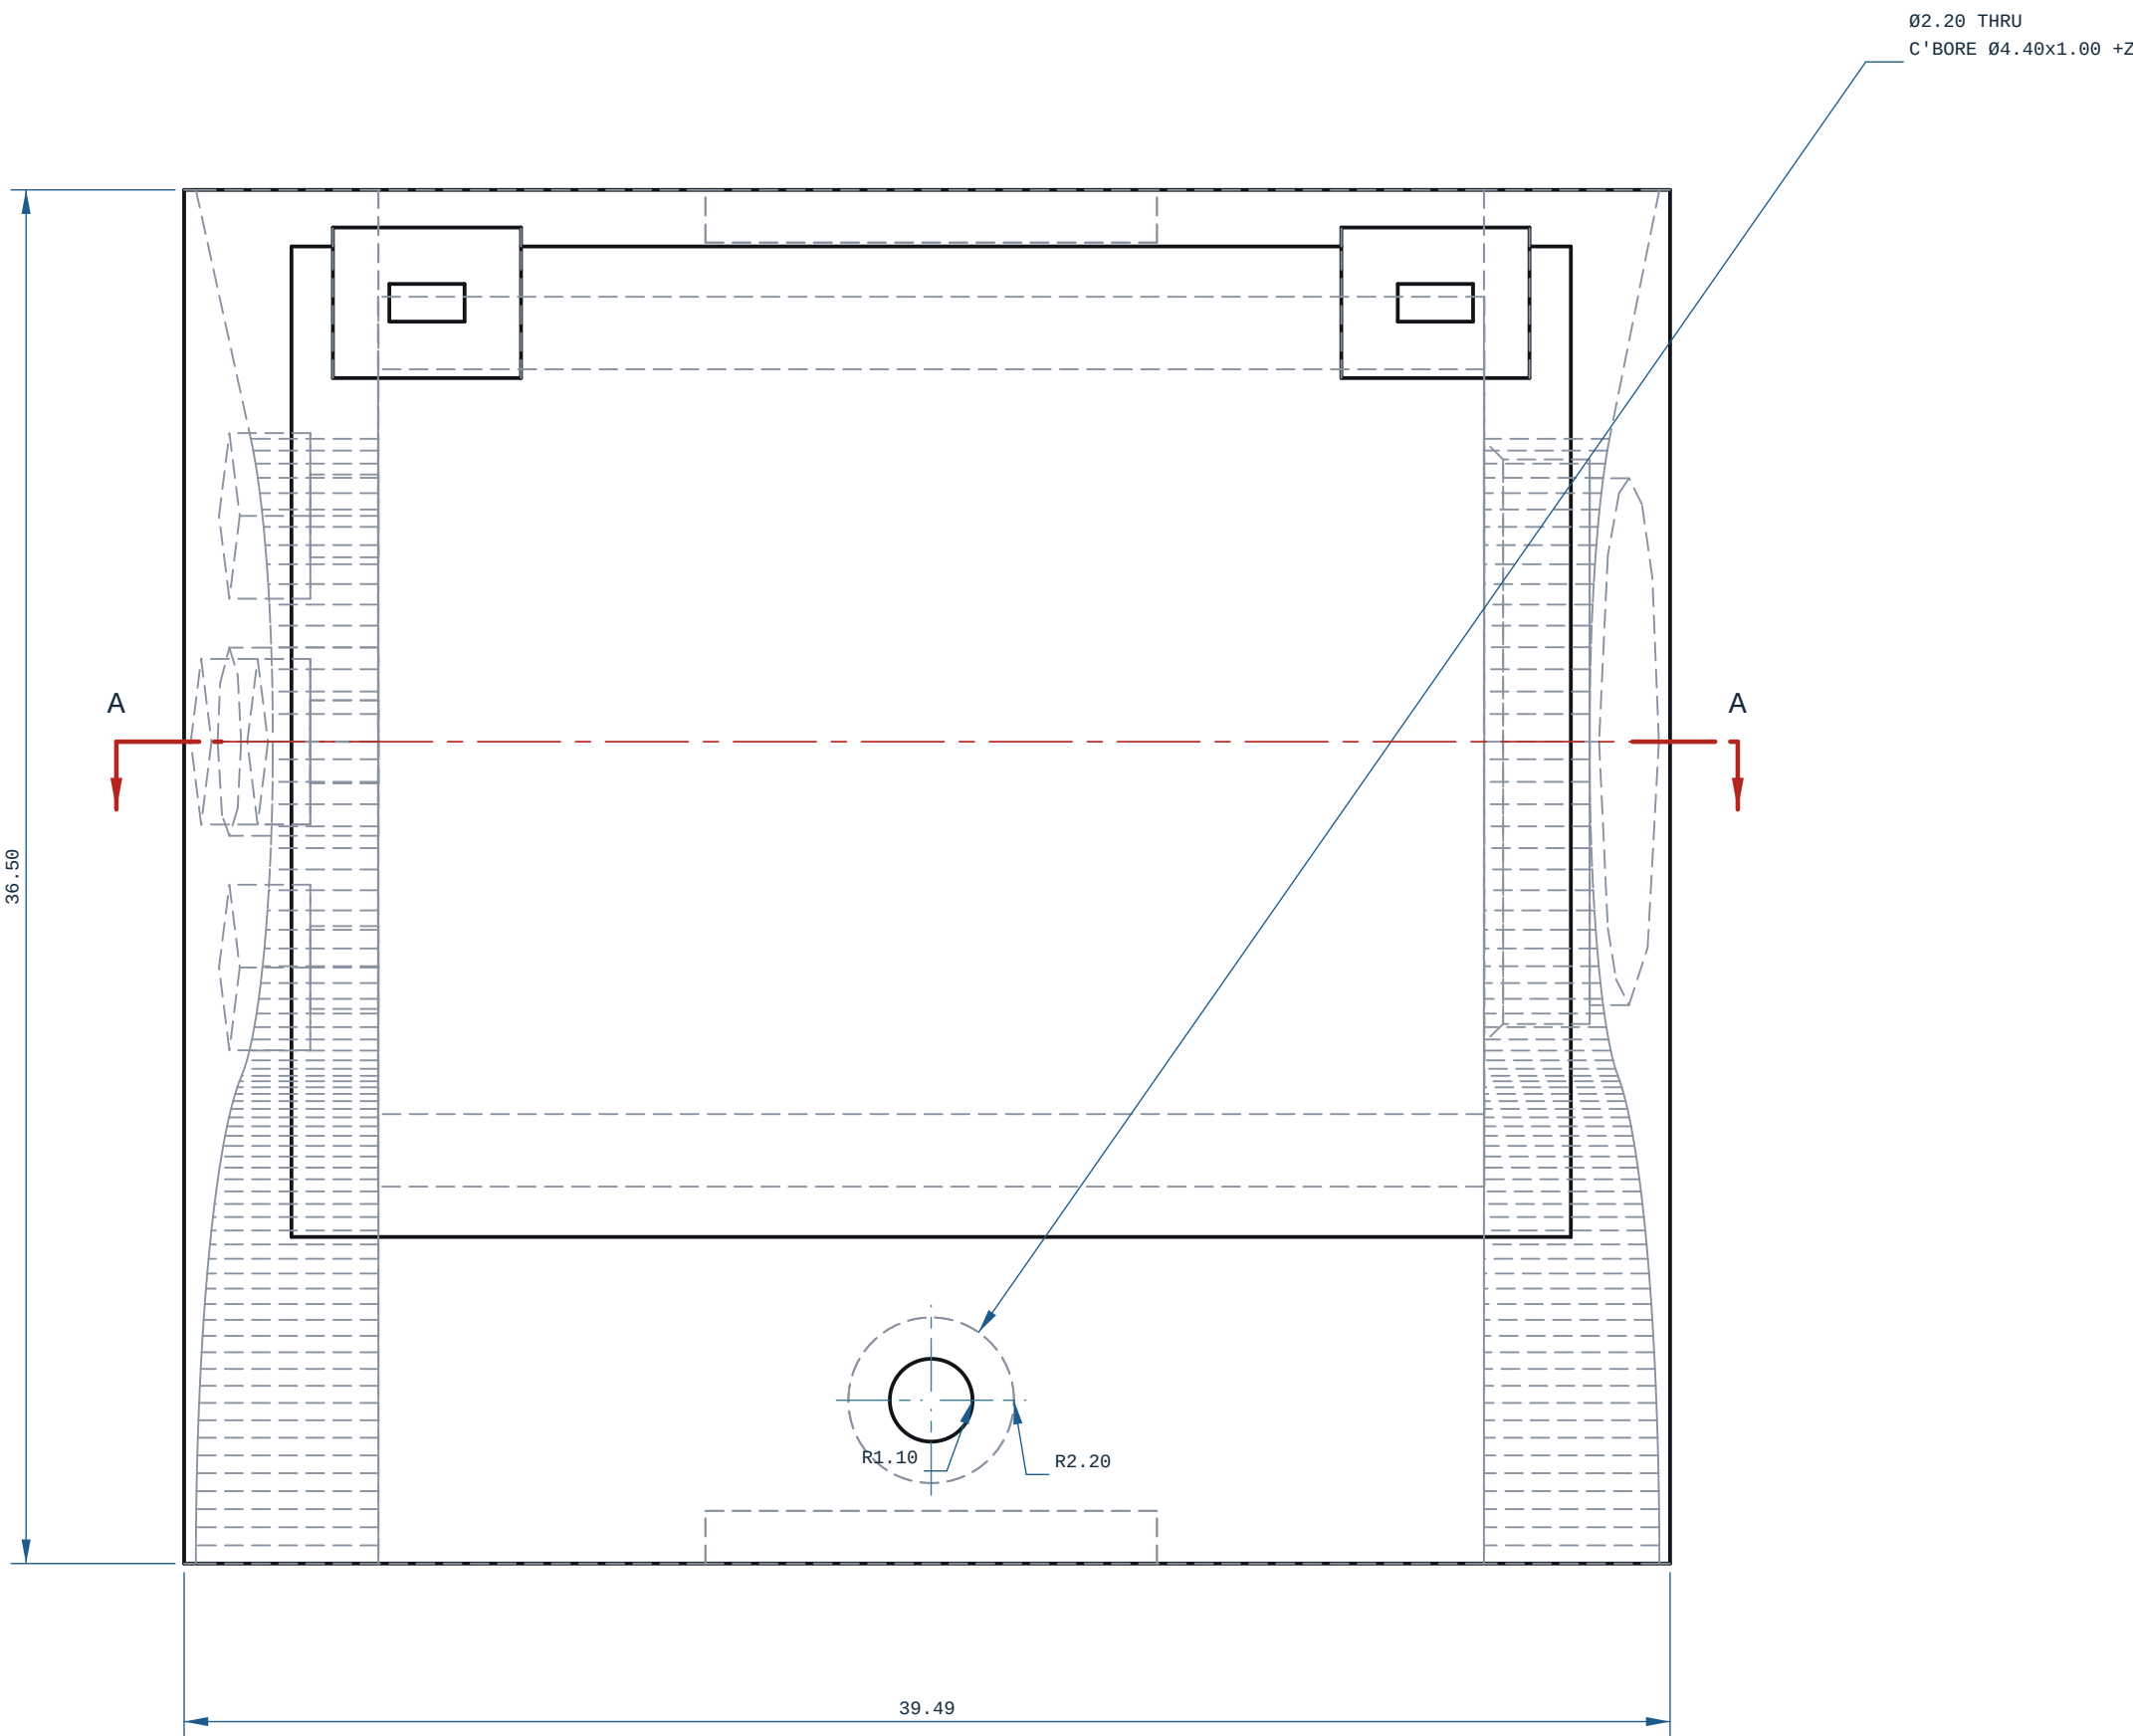


TOP VIEW

X ? Y ?

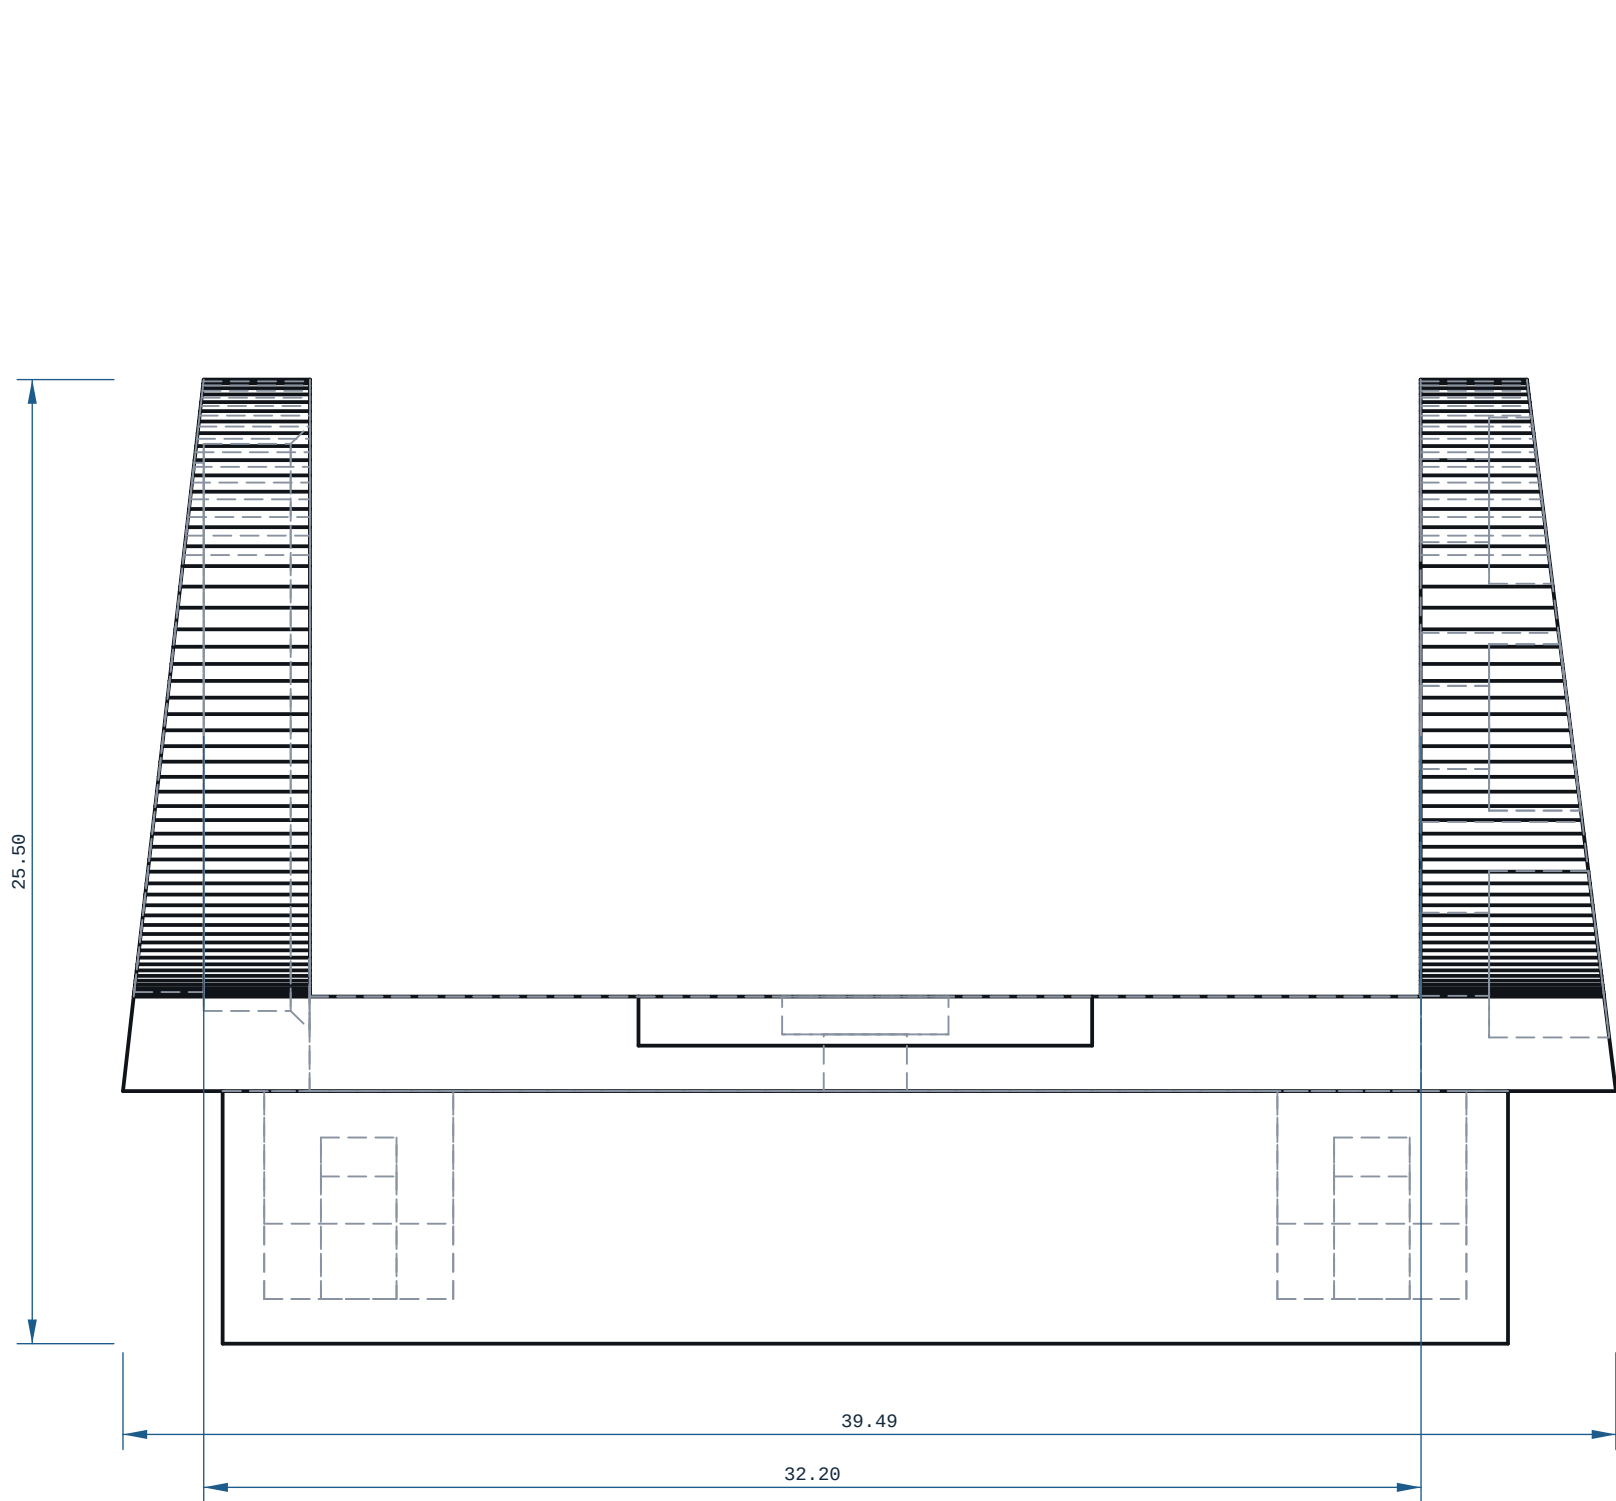


FRONT VIEW

-X ? Z ?

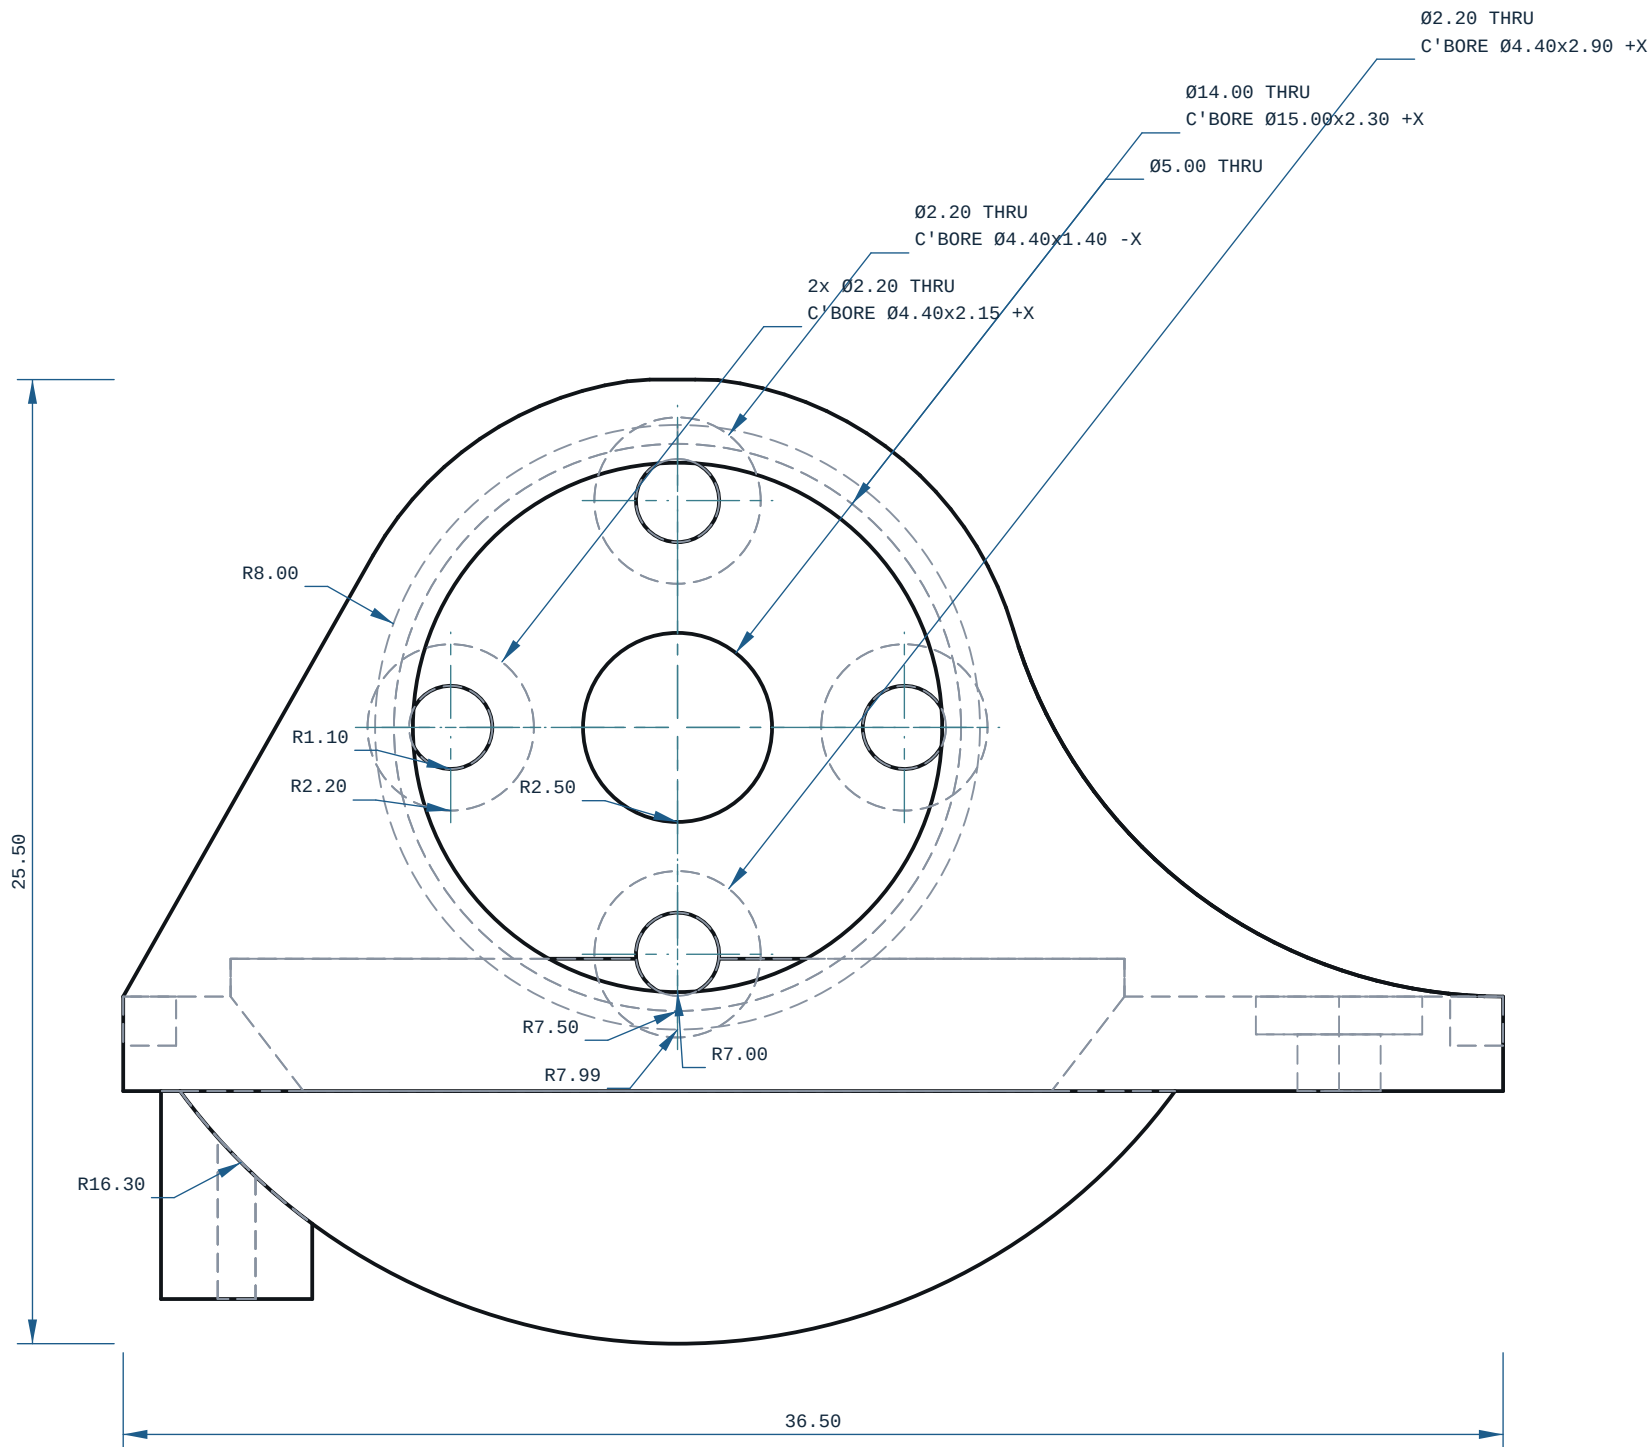

RIGHT VIEW

-Y ? Z ?

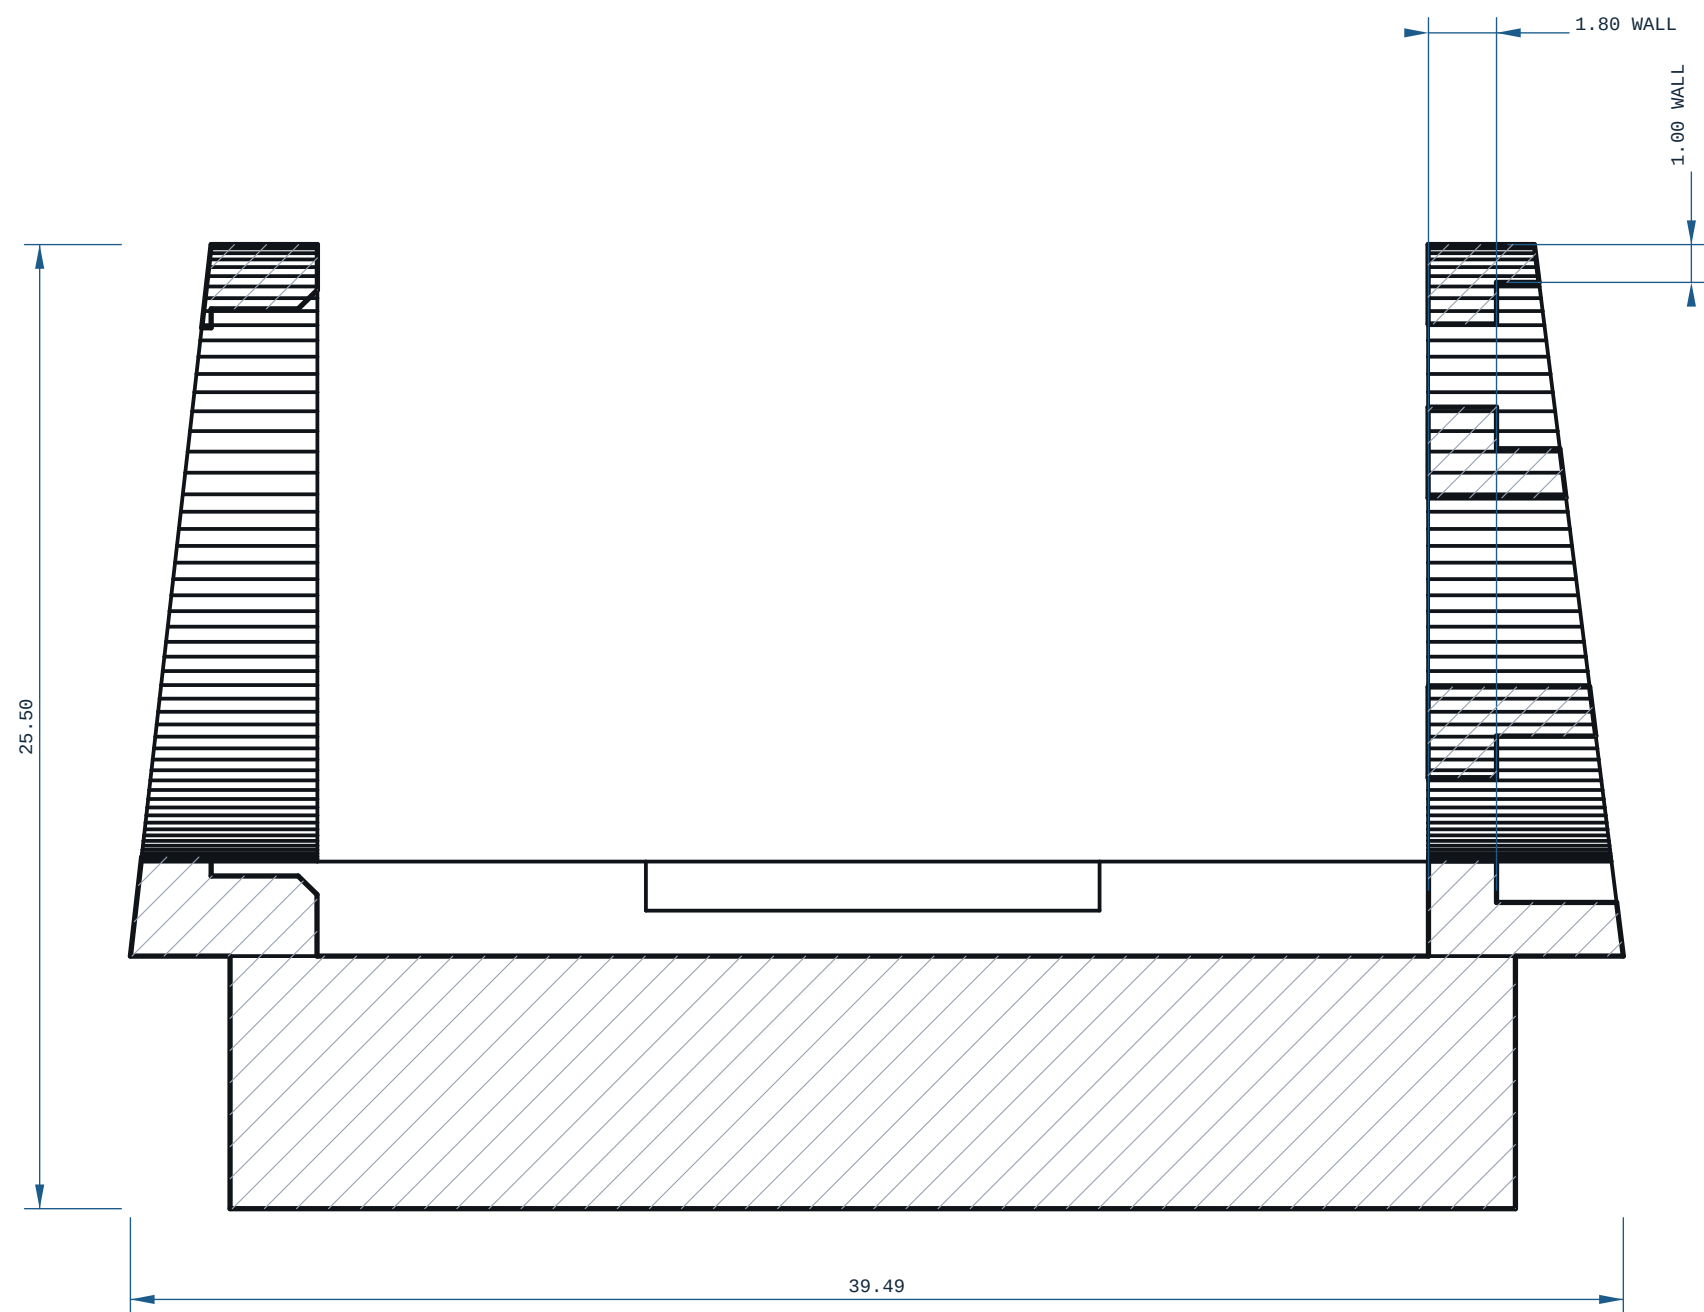

SECTION A-A

MICRODUCK-ANKLE-RIGHT

MATERIAL		PROCESS	SCALE
PLA		FDM	5:1
CATEGORY	GENERAL TOL	FINISH	SHEET
bracket	CANNOT DETERMINE ?~	AS PRINTED	A1 1/1
VOLUME (MEASURED)		MASS (ASSUMES PLA)	UNITS
7.90 cm3		9.8 g	mm / deg
SIZE (BOX, MEASURED)		DRWN	PROJECTION
39.49 x 36.50 x 25.50		ce-cad 2026-09-03	THIRD ANGLE
SOURCE (DESIGN FILE)			
ce-parts/microduck-ankle-right/current/cad/part.py			