




ISOMETRIC VIEW

54.02 x 3.80 x 6.63 mm

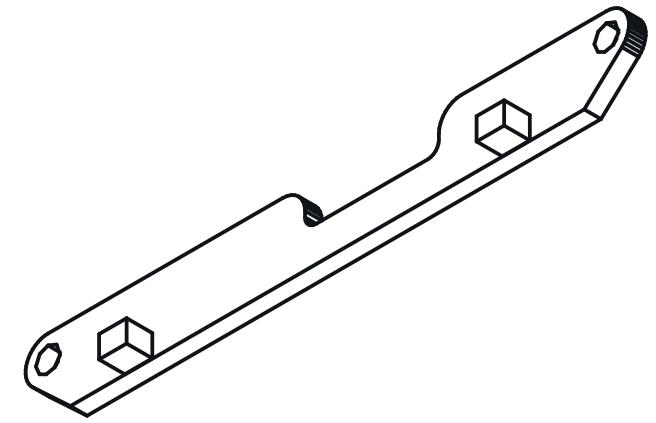


REFERENCE RENDER (ISO2) ? rendered off this solid,
900 x 680 px

NOTES

1. ALL DIMENSIONS IN mm AND DEGREES. EVERY DIMENSION AND EVERY HOLE CALLOUT WAS MEASURED OFF THE SOLID.
2. PROCESS: FDM.
3. THINNEST WALL, WHOLE SOLID: 0.9210 mm, AT X=25.809 Y=35.590 Z=52.874 ? MEASURED OVER THE WHOLE SOLID BY RAY=EXACT AT 0.370 mm SAMPLE SPACING (A FEATURE NARROWER THAN THAT CAN BE MISSED). A RAY MINIMUM AT AN EDGE, A FILLET RUN-OUT OR A CHAMFER TIP IS A REAL DISTANCE THROUGH MATERIAL AND IS NOT A PRINTABLE WALL.
4. GENERAL TOLERANCE CANNOT DETERMINE ? SEE PRINT / DFM NOTES UNLESS STATED.
5. SECTION A-A AT Z=53.60: THINNEST MATERIAL IN THIS PLANE ONLY 0.92 mm, AT X=26.55, Y=35.01 ? A SCAN OF ONE CUT, NOT THE PART MINIMUM.
6. FRONT VIEW: hidden lines SUPPRESSED: all 768 edge samples still land on drawn ink without them.
7. TOP VIEW: hidden lines KEPT: without them 48 of 764 edge samples have no ink within 0.35 mm (worst 0.563 mm) and the feature would be missing from the sheet.


PRINT / DFM

1. ORIENTATION: laid flat (54 x 4 x 7 mm)
2. THINNEST WALL: 0.92 mm (floor 0.80 mm = 2 perimeters @ 0.4 mm nozzle)
3. 2 horizontal bore(s) bridge at the crown: ream any bearing or press-fit bore to size
4. FILAMENT: PLA, ~1 g (modelled), 34 layers @ 0.2 mm
5. TOLERANCE BASIS, IN-HOUSE: CANNOT DETERMINE. Every Bambu on this farm records tolerance_mm: null, cite "no coupon printed and measured on this machine" (ce-machines/bambu-h2s-*, bambu-h2d-*/capabilities.json, read 2026-09-02), and Bambu Lab's own H2D Pro spec sheet carries no dimensional-accuracy line. DIMENSIONS HERE ARE NOMINAL AS MODELLED.
6. TOLERANCE BASIS, OUTSOURCED: JLC3DP +/-0.3 mm FDM (jlc3dp.com, ce-machines/farm-jlc3dp); Hubs +/-0.5%, floor +/-0.5 mm (hubs.com/3d-printing/, ce-machines/farm-hubs). Apply the route's figure, not both. The +/-0.2 mm in cecad/machining.py fdm is a repo planning constant with no vendor cite and is NOT used here. One printed and measured coupon closes this note.
7. NO ISO 286 CLASS IS DECLARED ON ANY BORE: FDM cannot be sized to one (H7/p6 at 03 is a 0.010 mm band). REAM bearing and press-fit bores after printing.

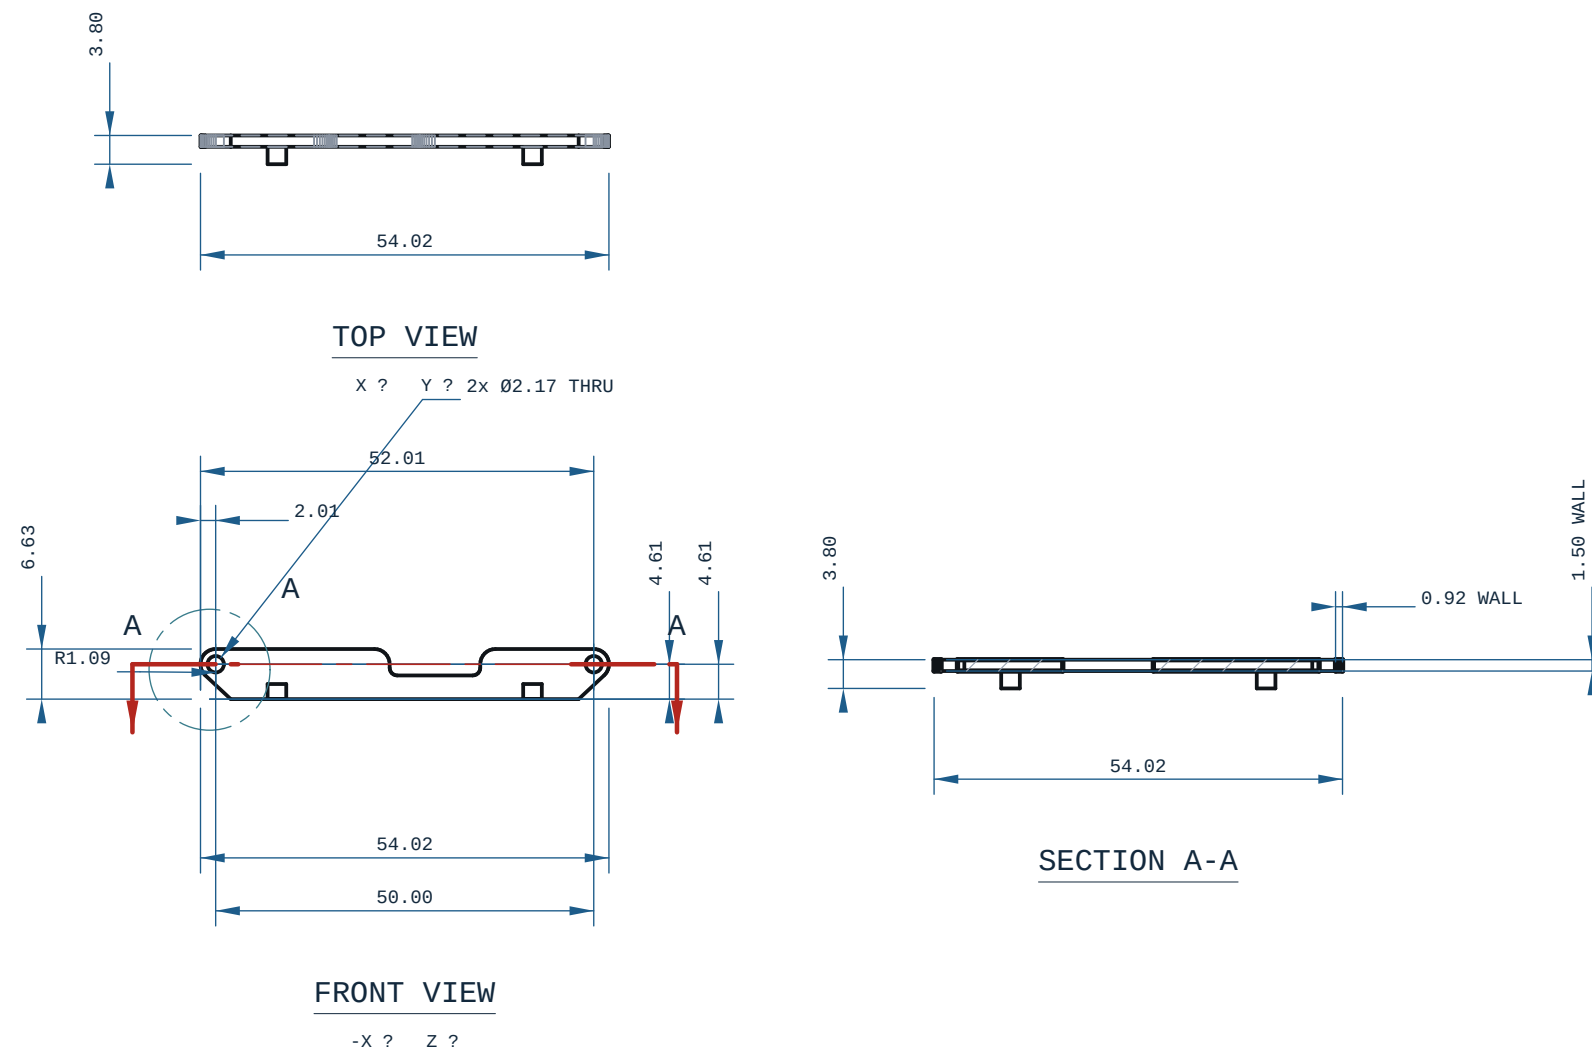

SECTION A-A

SCALE 5:1
DETAIL A

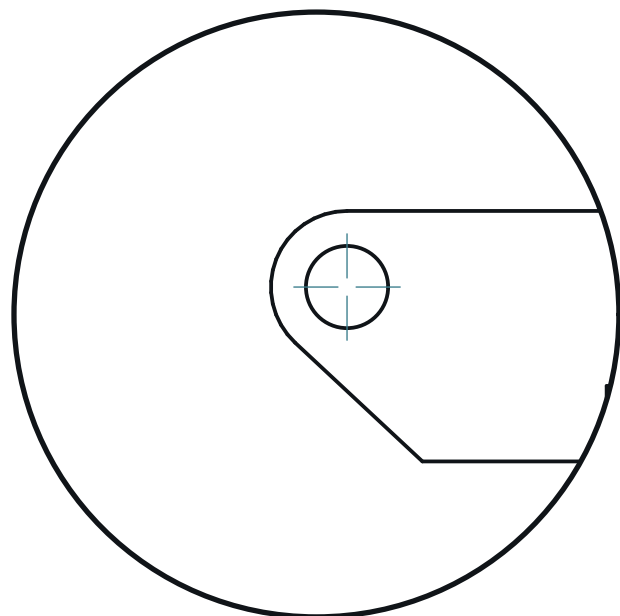

REV A MICRODUC K		REV A MICRODUC K	
MATERIAL PLA CATEGORY bracket		PROCESS FDM FINISH AS PRINTED	
SCALE 1:1 SHEET A2 1/1		SCALE 1:1 SHEET A2 1/1	
VOLUME (MEASURED) 0.46 cm3 SIZE (BBOX, MEASURED) 54.02 x 3.80 x 6.63		MASS (ASSUMES PLA) 0.6 g DRAWN ce-cad 2026-09-03	
SOURCE (DESIGN FILE) ce-parts/microduck-banana-pcb-locker/current/cad/part.py		UNITS mm / deg PROJECTION THIRD ANGLE	