




ISOMETRIC VIEW

32.45 x 34.50 x 19.00 mm

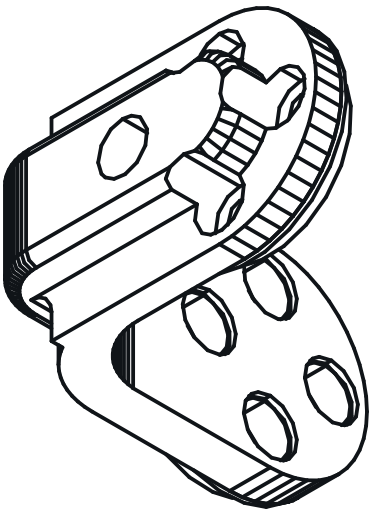

REFERENCE RENDER (ISO2) ? rendered off this solid, 900 x 600 px

HOLE TABLE ? 5 POSITIONS

TAG	SIZE	X	Z	C'BORE
A1	Ø2.40 THRU	17.50	6.00	Ø4.84x5.50 +Y
A2	Ø2.40 THRU	23.50	0.00	Ø4.84x5.50 +Y
A3	Ø6.00 x 1.95 DP	17.50	0.00	-
A4	Ø2.40 THRU	11.50	0.00	Ø4.84x5.50 +Y
A5	Ø2.40 THRU	17.50	-6.00	Ø4.84x5.50 +Y

every row measured off the solid; positions are model coordinates, mm. C'BORE side is the face it opens on; INT = centred in the bore, opening on neither face.

NOTES

- ALL DIMENSIONS IN mm AND DEGREES. EVERY DIMENSION AND EVERY HOLE CALLOUT WAS MEASURED OFF THE SOLID.
- PROCESS: FDM.
- THINNEST WALL, WHOLE SOLID (RAY MINIMUM): 0.8000 mm, AT X=17.520 Y=-17.533 Z=7.200 ? MEASURED OVER THE WHOLE SOLID BY RAY+EXACT AT 0.9660 mm SAMPLE SPACING (A FEATURE NARROWER THAN THAT CAN BE MISSED). THIS IS A DISTANCE THROUGH MATERIAL, NOT A WALL: AT AN EDGE, A FILLET RUN-OUT OR A CHAMFER TIP IT IS REAL AND UNPRINTABLE BY DEFINITION. DO NOT JUDGE PRINTABILITY BY IT ? THE NEXT NOTE IS THE ONE THAT DOES.
- PRINTABLE MINIMUM WALL: 1.3580 mm, AT X=34.000 Y=9.163 Z=-0.564 ? MEASURED AS THE SMALLEST MEDIAN WALL OVER A NEIGHBOURHOOD OF 2.8990 mm (>= 8 SAMPLES), RAYS CAPPED AT 4.000 mm, BY cecad.inspect.printable_wall_detail. AGAINST THE 0.8000 mm FLOOR (2 PERIMETERS @ 0.4 mm NOZZLE, cecad/printed.py:801): VERDICT PASS
- FILLETS AND ROUNDS NOT LEADERED IN A VIEW: R1.00 (28 PLACES, AXIS Y, e.g. AT X=37.686 Y=-20.447 Z=-4.707). NO ORTHOGRAPHIC VIEW ON THIS SHEET SEES THESE EDGES SQUARE, AND A CIRCLE SEEN OBLIQUELY PROJECTS AS AN ELLIPSE WHOSE FITTED RADIUS IS NOT THE EDGE'S ? SO EACH IS STATED HERE, MEASURED OFF THE SOLID BY cecad.inspect.arc_radii, RATHER THAN LEADERED OFF A PROJECTION THAT CANNOT CARRY IT.
- DETAIL CALLOUTS (MANUFACTURING-REQUIREMENTS A.7): NONE ON THIS SHEET. DETAIL A dropped: a Ø17.4 mm region needs 4:1 to beat the sheet's 2:1 by 2x and only 64 mm of the bottom band is free ? it would be drawn the same size as the view it points at. THE REGIONS ARE DRAWN AT THE SHEET SCALE IN THE VIEWS ABOVE; NOTHING IS HIDDEN, NOTHING IS ENLARGED. WHAT SETTLES IT: BIGGER PAPER, OR A SECOND SHEET FOR THE DETAILS.
- GENERAL TOLERANCE CANNOT DETERMINE ? SEE PRINT / DFM NOTES UNLESS STATED.
- SECTION A-A AT Z=0.00: THINNEST MATERIAL IN THIS PLANE ONLY 0.80 mm, AT X=9.90, Y=-18.39 ? A SCAN OF ONE CUT, NOT THE PART MINIMUM.
- SECTION A-A AT Z=0.00: THINNEST MATERIAL IN THIS PLANE ONLY 0.80 mm, AT X=9.90, Y=-18.39 ? A SCAN OF ONE CUT, NOT THE PART MINIMUM.
- FRONT VIEW: hidden lines KEPT: without them 7 of 702 edge samples have no ink within 0.35 mm (worst 1.000 mm) and the feature would be missing from the sheet.
- TOP VIEW: hidden lines KEPT: without them 4 of 679 edge samples have no ink within 0.35 mm (worst 0.438 mm) and the feature would be missing from the sheet.
- RIGHT VIEW: hidden lines KEPT: without them 46 of 654 edge samples have no ink within 0.35 mm (worst 3.450 mm) and the feature would be missing from the sheet.

MICRODUCK-HIP-BRACKET

MATERIAL		PROCESS		the feature would be missing from the sheet.	
PLA		FDM		PRINT / DFM 2:1	
CATEGORY	GENERAL TOL	FINISH		SHEET	
bracket	CANNOT DETERMINE ?	AS PRINTED		1. ORIENTATION: laid flat (32 x 34 x 19 mm)	
VOLUME (MEASURED)		MASS (ASSUMES PLA)		2. THINNEST WALL, WHOLE-SOLID (RAY MINIMUM): 0.8000 mm ? a distance through material, NOT a printable wall where it falls on an edge, a fillet run-out or a chamfer tip. Printability is judged on the next line.	
4.55 cm3		5.6 g		3. PRINTABLE MINIMUM WALL: 1.3580 mm (smallest median wall over a 2.8990 mm neighbourhood, cecad.inspect.printable_wall_detail) against a 0.8000 mm floor (2 perimeters @ 0.4 mm nozzle): VERDICT PASS	
SIZE (BBOX, MEASURED)		DRAWN		4. 22 horizontal bore(s) bridge at the crown: ream any	
32.45 x 34.50 x 19.00		ce-cad 2026-09-03			
SOURCE (DESIGN FILE)		ce-parts/microduck-hip-bracket/current/cad/part.py			

5. FILAMENT: PLA, 4 g (modelled), 95 layers @ 0.2 mm

6. TOLERANCE BASIS, IN-HOUSE: CANNOT DETERMINE. Every Bambu