microduck-motor-support SCALE 1:1 A2 THIRD ANGLE

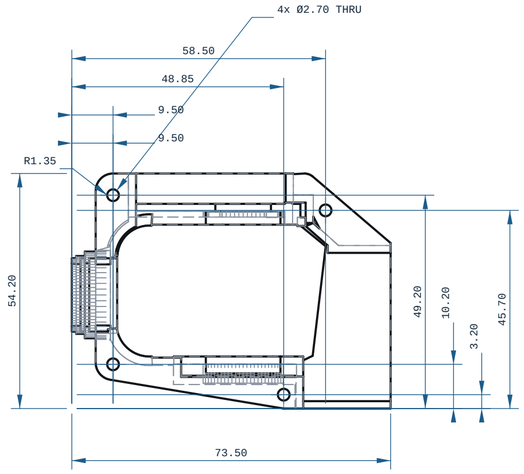

TOP VIEW

X ? Y ?

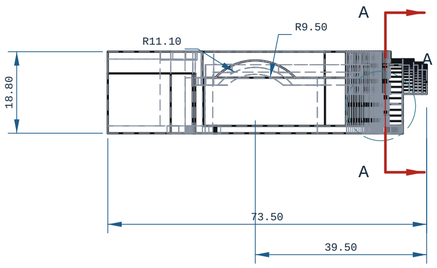

FRONT VIEW

-X ? Z ?

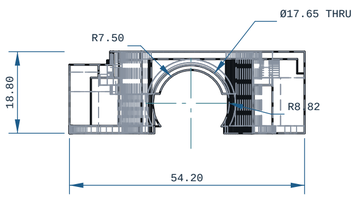

RIGHT VIEW

-Y ? Z ?



SECTION A-A

SCALE 5:1

DETAIL A

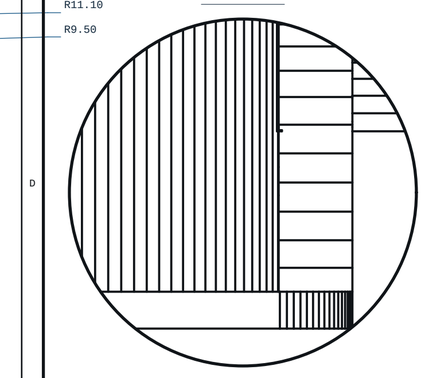

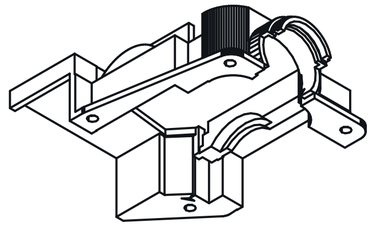

ISOMETRIC VIEW

73.50 x 54.20 x 18.80 mm

REFERENCE RENDER (ISO2) ? rendered off this solid, 900 x 680 px

NOTES

1. ALL DIMENSIONS IN mm AND DEGREES. EVERY DIMENSION AND EVERY HOLE CALLOUT WAS MEASURED OFF THE SOLID.
2. PROCESS: FDM.
3. THINNEST WALL, WHOLE SOLID: 0.0080 mm, AT X=-28.950 Y=-8.559 Z=6.677 ? MEASURED OVER THE WHOLE SOLID BY RAY+EXACT AT 1.297 mm SAMPLE SPACING (A FEATURE NARROWER THAN THAT CAN BE MISSED). A RAY MINIMUM AT AN EDGE, A FILLET RUN-OUT OR A CHAMFER TIP IS A REAL DISTANCE THROUGH MATERIAL AND IS NOT A PRINTABLE WALL.
4. GENERAL TOLERANCE CANNOT DETERMINE ? SEE PRINT / DFM NOTES UNLESS STATED.
5. SECTION A-A AT X=-30.00: THINNEST MATERIAL IN THIS PLANE ONLY 1.70 mm, AT Y=-18.27, Z=1.25 ? A SCAN OF ONE CUT, NOT THE PART MINIMUM.
6. FRONT VIEW: hidden lines KEPT: without them 77 of 2396 edge samples have no ink within 0.35 mm (worst 2.532 mm) and the feature would be missing from the sheet.
7. TOP VIEW: hidden lines KEPT: without them 391 of 2134 edge samples have no ink within 0.35 mm (worst 2.212 mm) and the feature would be missing from the sheet.
8. RIGHT VIEW: hidden lines KEPT: without them 237 of 1958 edge samples have no ink within 0.35 mm (worst 3.107 mm) and the feature would be missing from the sheet.

PRINT / DFM

1. ORIENTATION: laid flat (74 x 54 x 19 mm)
2. THINNEST WALL: 0.01 mm (floor 0.80 mm = 2 perimeters @ 0.4 mm nozzle)
3. 1 horizontal bore(s) bridge at the crown: ream any bearing or press-fit bore to size
4. FILAMENT: PLA, ~10 g (modelled), 94 layers @ 0.2 mm
5. TOLERANCE BASIS, IN-HOUSE: CANNOT DETERMINE. Every Bambu on this farm records tolerance_mm: null, cite "no coupon printed and measured on this machine" (ce-machines/bambu-h2s-*, bambu-h2d-*/capabilities.json, read 2026-09-02), and Bambu Lab's own H2D Pro spec sheet carries no dimensional-accuracy line. DIMENSIONS HERE ARE NOMINAL AS MODELLED.
6. TOLERANCE BASIS, OUTSOURCED: JLC3DP +/-0.3 mm FDM (jlc3dp.com, ce-machines/farm-jlc3dp); Hubs +/-0.5%, floor +/-0.5 mm (hubs.com/3d-printing/, ce-machines/farm-hubs). Apply the route's figure, not both. The +/-0.2 mm in cecad/machining.py fdm is a repo planning constant with no vendor cite and is NOT used here. One printed and measured coupon closes this note.
7. NO ISO 286 CLASS IS DECLARED ON ANY BORE: FDM cannot be sized to one (H7/p6 at O3 is a 0.010 mm band). REAM bearing and press-fit bores after printing.

MICRODUCK-MOTOR-SUPPORT

REV A

MATERIAL: PLA		PROCESS: FDM	SCALE: 1:1
CATEGORY: bracket	GENERAL TOL: CANNOT DETERMINE ?~	FINISH: AS PRINTED	SHEET: A2 1/1
VOLUME (MEASURED): 7.66 cm3		MASS (ASSUMES PLA): 9.5 g	UNITS: mm / deg
SIZE (BBOX, MEASURED): 73.50 x 54.20 x 18.80		DRAWN: ce-cad 2026-09-03	PROJECTION: THIRD ANGLE
SOURCE (DESIGN FILE): ce-parts/microduck-motor-support/current/cad/part.py			