




ISOMETRIC VIEW

65.04 x 30.04 x 0.84 mm

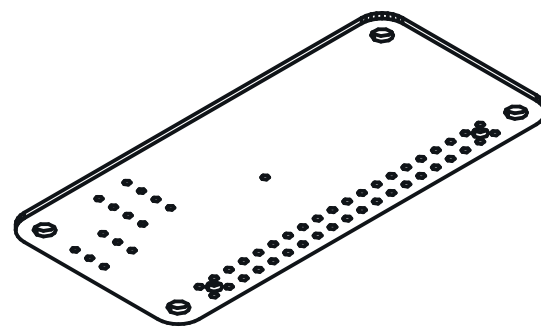


REFERENCE RENDER (ISO2) ? rendered off this solid,
900 x 800 px

NOTES

1. ALL DIMENSIONS IN mm AND DEGREES. EVERY DIMENSION AND EVERY HOLE CALLOUT WAS MEASURED OFF THE SOLID.
2. THINNEST WALL, WHOLE SOLID: 0.2868 mm, AT X=52.768 Y=0.911 Z=0.288 ? MEASURED OVER THE WHOLE SOLID BY RAY-EXACT AT 1.687 mm SAMPLE SPACING (A FEATURE NARROWER THAN THAT CAN BE MISSED). A RAY MINIMUM AT AN EDGE, A FILLET RUN-OUT OR A CHAMFER TIP IS A REAL DISTANCE THROUGH MATERIAL AND IS NOT A PRINTABLE WALL.
3. GENERAL TOLERANCE CANNOT DETERMINE ? SEE PRINT / DFM NOTES UNLESS STATED.
4. SECTION A-A AT Y=-1.27: THINNEST MATERIAL IN THIS PLANE ONLY 0.84 mm, AT X=59.08, Z=0.42 ? A SCAN OF ONE CUT, NOT THE PART MINIMUM.
5. TOP VIEW: hidden lines SUPPRESSED: all 566 edge samples still land on drawn ink without them.
6. FRONT VIEW: hidden lines SUPPRESSED: all 566 edge samples still land on drawn ink without them.


PRINT / DFM

1. ORIENTATION: Laid flat (65 x 30 x 1 mm)
2. THINNEST WALL: 0.29 mm (floor 0.88 mm = 2 perimeters @ 0.4 mm nozzle)
3. SMALL HOLES 00.05/1.00/1.02 PRINT UNDERSIZE: drill to tapping size and form-tap after printing; heat-set inserts for M2 into PLA
4. FILAMENT: FR4, -3 g (modelled), 5 layers @ 0.2 mm
5. TOLERANCE BASIS, IN-HOUSE: CANNOT DETERMINE. Every Bambu on this farm records tolerance.mm: null, cite "no coupon printed and measured on this machine" (ce-machines/bambu-h2s-, bambu-h2d-/capabilities.json, read 2026-09-02), and Bambu Lab's own H2D Pro spec sheet carries no dimensional-accuracy line. DIMENSIONS HERE ARE NOMINAL AS MODELLED.
6. TOLERANCE BASIS, OUTSOURCED: JLC3DP +/-0.3 mm FDM (jlc3dp.com, ce-machines/farm-jlc3dp); Hubs +/-0.5%, floor +/-0.5 mm (hubs.com/3d-printing/, ce-machines/farm-hubs). Apply the route's figure, not both. The +/-0.2 mm in cecad/machining.py fdm is a repo planning constant with no vendor cite and is NOT used here. One printed and measured coupon closes this note.
7. NO ISO 286 CLASS IS DECLARED ON ANY BORE: FDM cannot be sized to one (W7/p6 at 03 is a 0.018 mm band). REAM bearing and press-fit bores after printing.
8. THIS IS OUR MODEL OF A BOUGHT PART, NOT A PART WE MAKE. The solid was built parametrically in this repo from the vendor's published figures; the vendor's own drawing governs every dimension, and this sheet exists so the assembly can be checked against a real envelope. Do not send it to a shop as a part to manufacture. Its component.json states origin: vendor and names the source it was measured from.

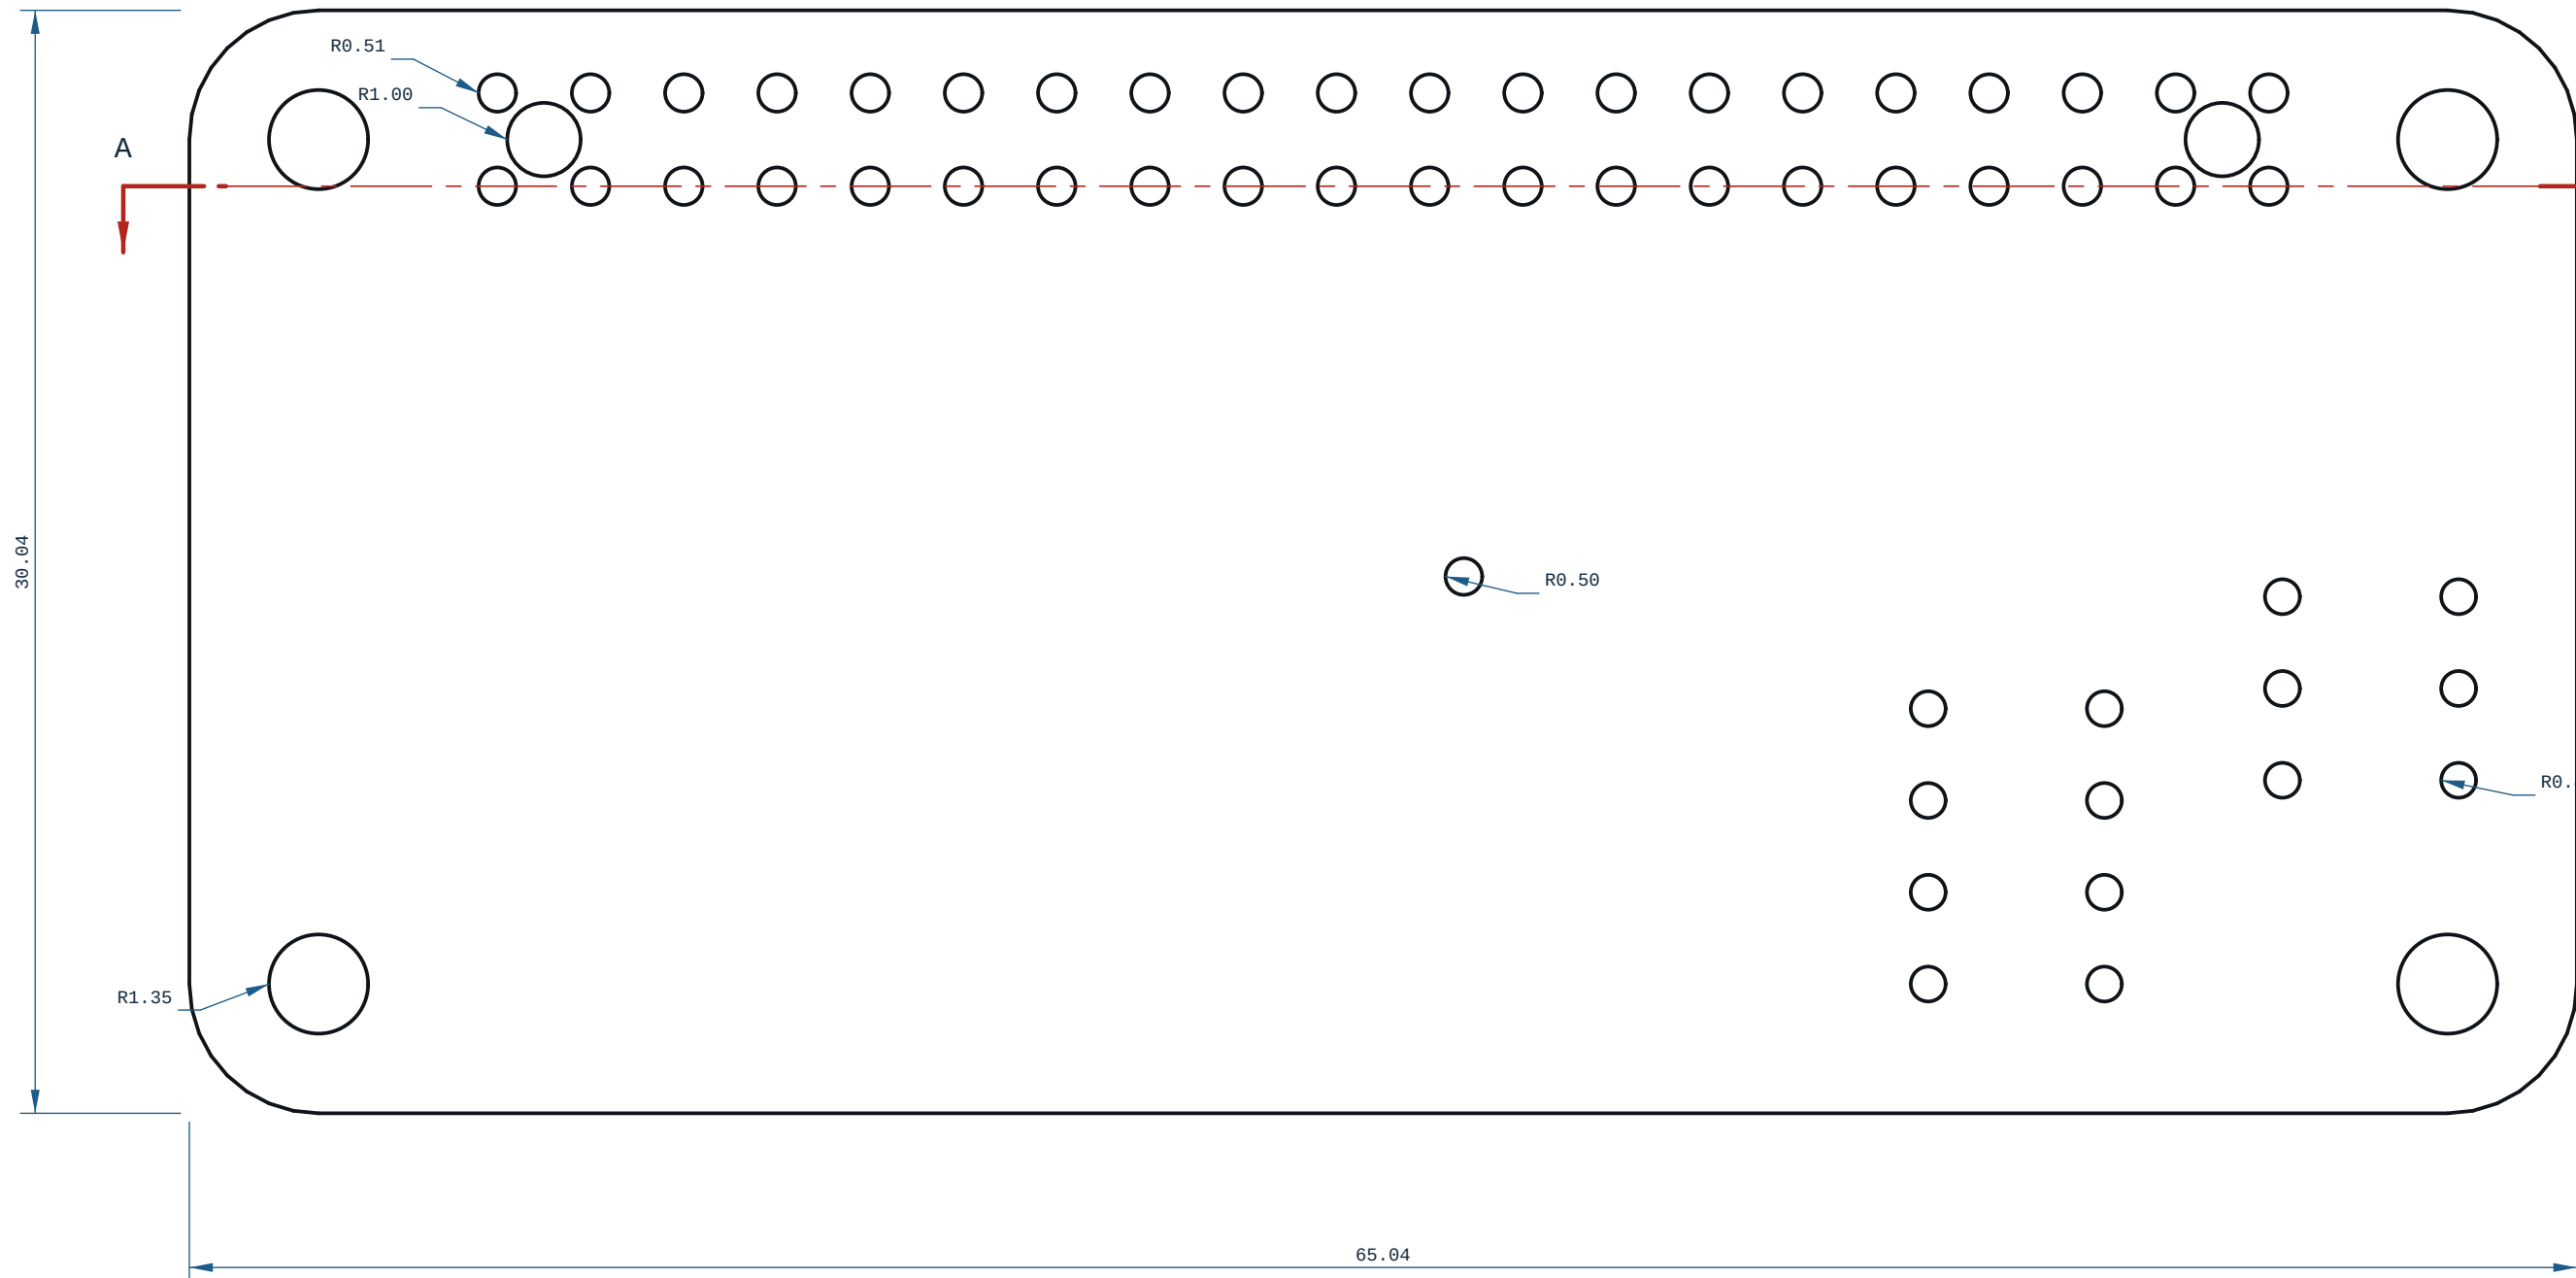


TOP VIEW

X ? Y ?

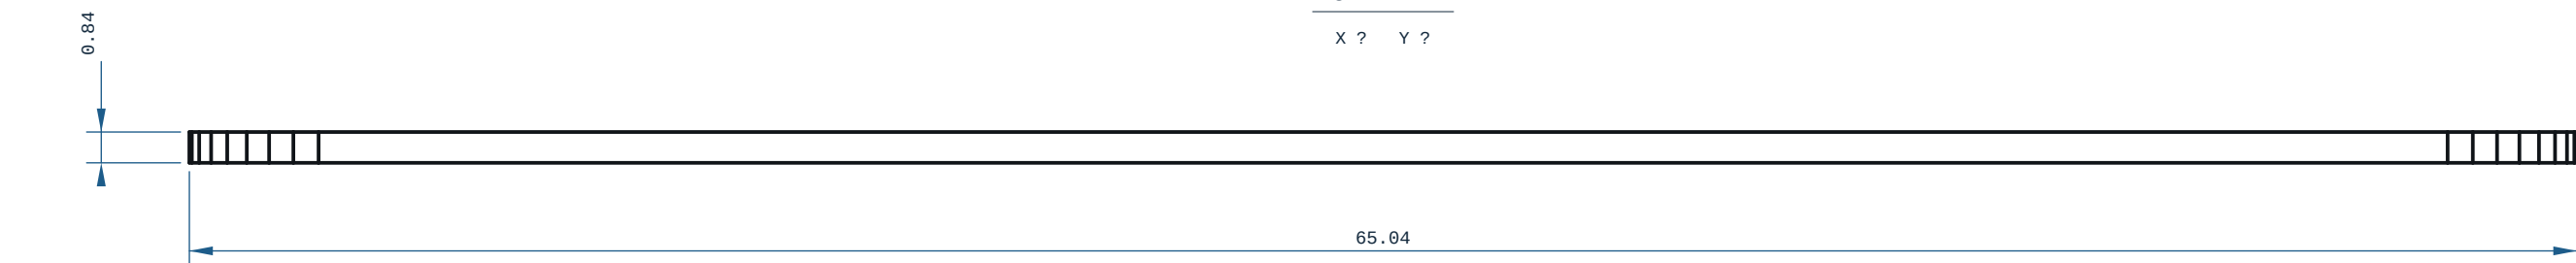

FRONT VIEW

-X ? Z ?

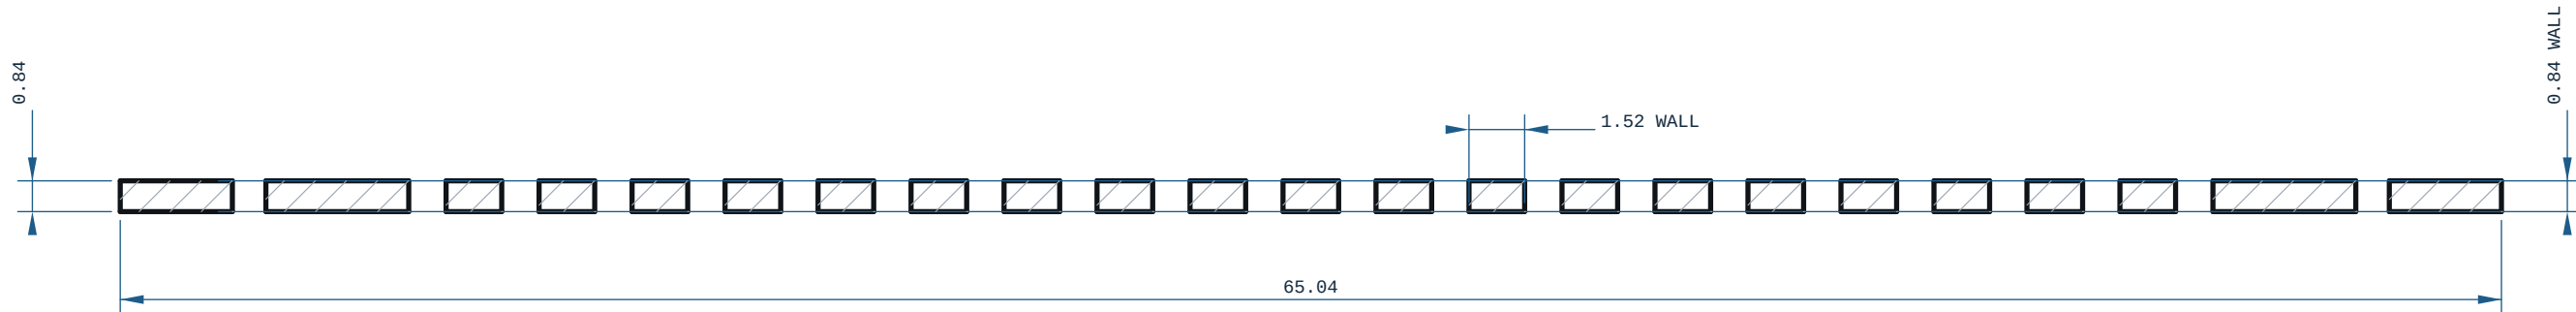

SECTION A-A

MICRODUCK - ROBOT - HAT - PCB



REV

A

MATERIAL		PROCESS		SCALE
FR4				5:1
CATEGORY	GENERAL TOL	FINISH	SHEET	
pcb	CANNOT DETERMINE 7~	AS PRINTED	A1 1/1	
VOLUME (MEASURED)		MASS (ASSUMES FR4)	UNITS	
1.57 cm3		3.0 g	mm / deg	
SIZE (BOX, MEASURED)		DRAWN	PROJECTION	
65.04 x 30.04 x 0.84		CE-CAD 2026-09-03	THIRD ANGLE	
SOURCE (DESIGN FILE)				
ce-parts/microduck-robot-hat-pcb/current/cad/part.py				