

ISOMETRIC VIEW
7.95 x 20.00 x 58.00 mm



REFERENCE RENDER (ISO2) ? rendered off this solid,
900 x 600 px

HOLE TABLE ? 8 POSITIONS

TAG	SIZE	Y	Z	C'BORE
A1	Ø2.20 THRU	26.24	40.02	Ø4.40x4.49 +X
A2	Ø2.20 THRU	17.76	40.02	Ø4.40x4.49 +X
A3	Ø6.00 THRU	22.00	35.70	
A4	Ø2.20 THRU	26.24	31.53	Ø4.40x4.49 +X
A5	Ø2.20 THRU	17.76	31.53	Ø4.40x4.49 +X
A6	Ø2.40 THRU	30.00	16.28	Ø4.84x3.00 +X
A7	Ø2.40 THRU	14.00	16.28	Ø4.84x3.00 +X
A8	Ø2.70 THRU	22.00	-6.22	Ø5.50x3.49 -X


every row measured off the solid; positions are model coordinates, mm. C'BORE side is the face it opens on.

NOTES


- ALL DIMENSIONS IN mm AND DEGREES. EVERY DIMENSION AND EVERY HOLE CALLOUT WAS MEASURED OFF THE SOLID.
- PROCESS: FDM.
- THINNEST WALL, WHOLE SOLID: 0.0200 mm, AT X=35.867 Y=31.977 Z=14.882 ? MEASURED OVER THE WHOLE SOLID BY RAY-EXACT AT 1.045 mm SAMPLE SPACING (A FEATURE NARROWER THAN THAT CAN BE MISSED). A RAY MINIMUM AT AN EDGE, A FILLET RUN-OUT OR A CHAMFER TIP IS A REAL DISTANCE THROUGH MATERIAL, AND IS NOT A PRINTABLE WALL.
- GENERAL TOLERANCE CANNOT DETERMINE ? SEE PRINT / DFM NOTES UNLESS STATED.
- SECTION A-A AT Y=17.76: THINNEST MATERIAL IN THIS PLANE ONLY 1.38 mm, AT X=38.53, Z=41.81 ? A SCAN OF ONE CUT, NOT THE PART MINIMUM.
- RIGHT VIEW: hidden lines KEPT: without them 94 of 820 edge samples have no ink within 0.35 mm (worst 6.509 mm) and the feature would be missing from the sheet.
- FRONT VIEW: hidden lines SUPPRESSED: all 867 edge samples still land on drawn ink without them.

PRINT / DFM

- ORIENTATION: upright, Z-up (8 x 20 x 58 mm)
- THINNEST WALL: 0.03 mm (floor 0.00 mm = 2 perimeters @ 0.4 mm nozzle)
- 15 horizontal bore(s) bridge at the crown: ream any bearing or press-fit bore to size
- FILAMENT: PLA, ~4 g (modelled), 200 layers @ 0.2 mm
- TOLERANCE BASIS, IN-HOUSE: CANNOT DETERMINE. Every Bambu on this farm records tolerance_mm: null, cite "no coupon printed and measured on this machine" (ce-machines/bambu-h2s-*, bambu-h2d-*/capabilities.json, read 2026-09-02), and Bambu Lab's own H2D Pro spec sheet carries no dimensional-accuracy line. DIMENSIONS HERE ARE NOMINAL AS MODELLED.
- TOLERANCE BASIS, OUTSOURCED: JLC3DP +/-0.3 mm FDM (jlc3dp.com, ce-machines/farm-jlc3dp); Hubs +/-0.5%, floor +/-0.5 mm (hubs.com/3d-printing/, ce-machines/farm-hubs). Apply the route's figure, not both. The +/-0.2 mm in cecad/machining.py fdm is a repo planning constant with no vendor cite and is NOT used here. One printed and measured coupon closes this note.
- NO ISO 286 CLASS IS DECLARED ON ANY BORE: FDM cannot be sized to one (H7/p6 at 03 is a 0.010 mm band). REAM bearing and press-fit bores after printing.

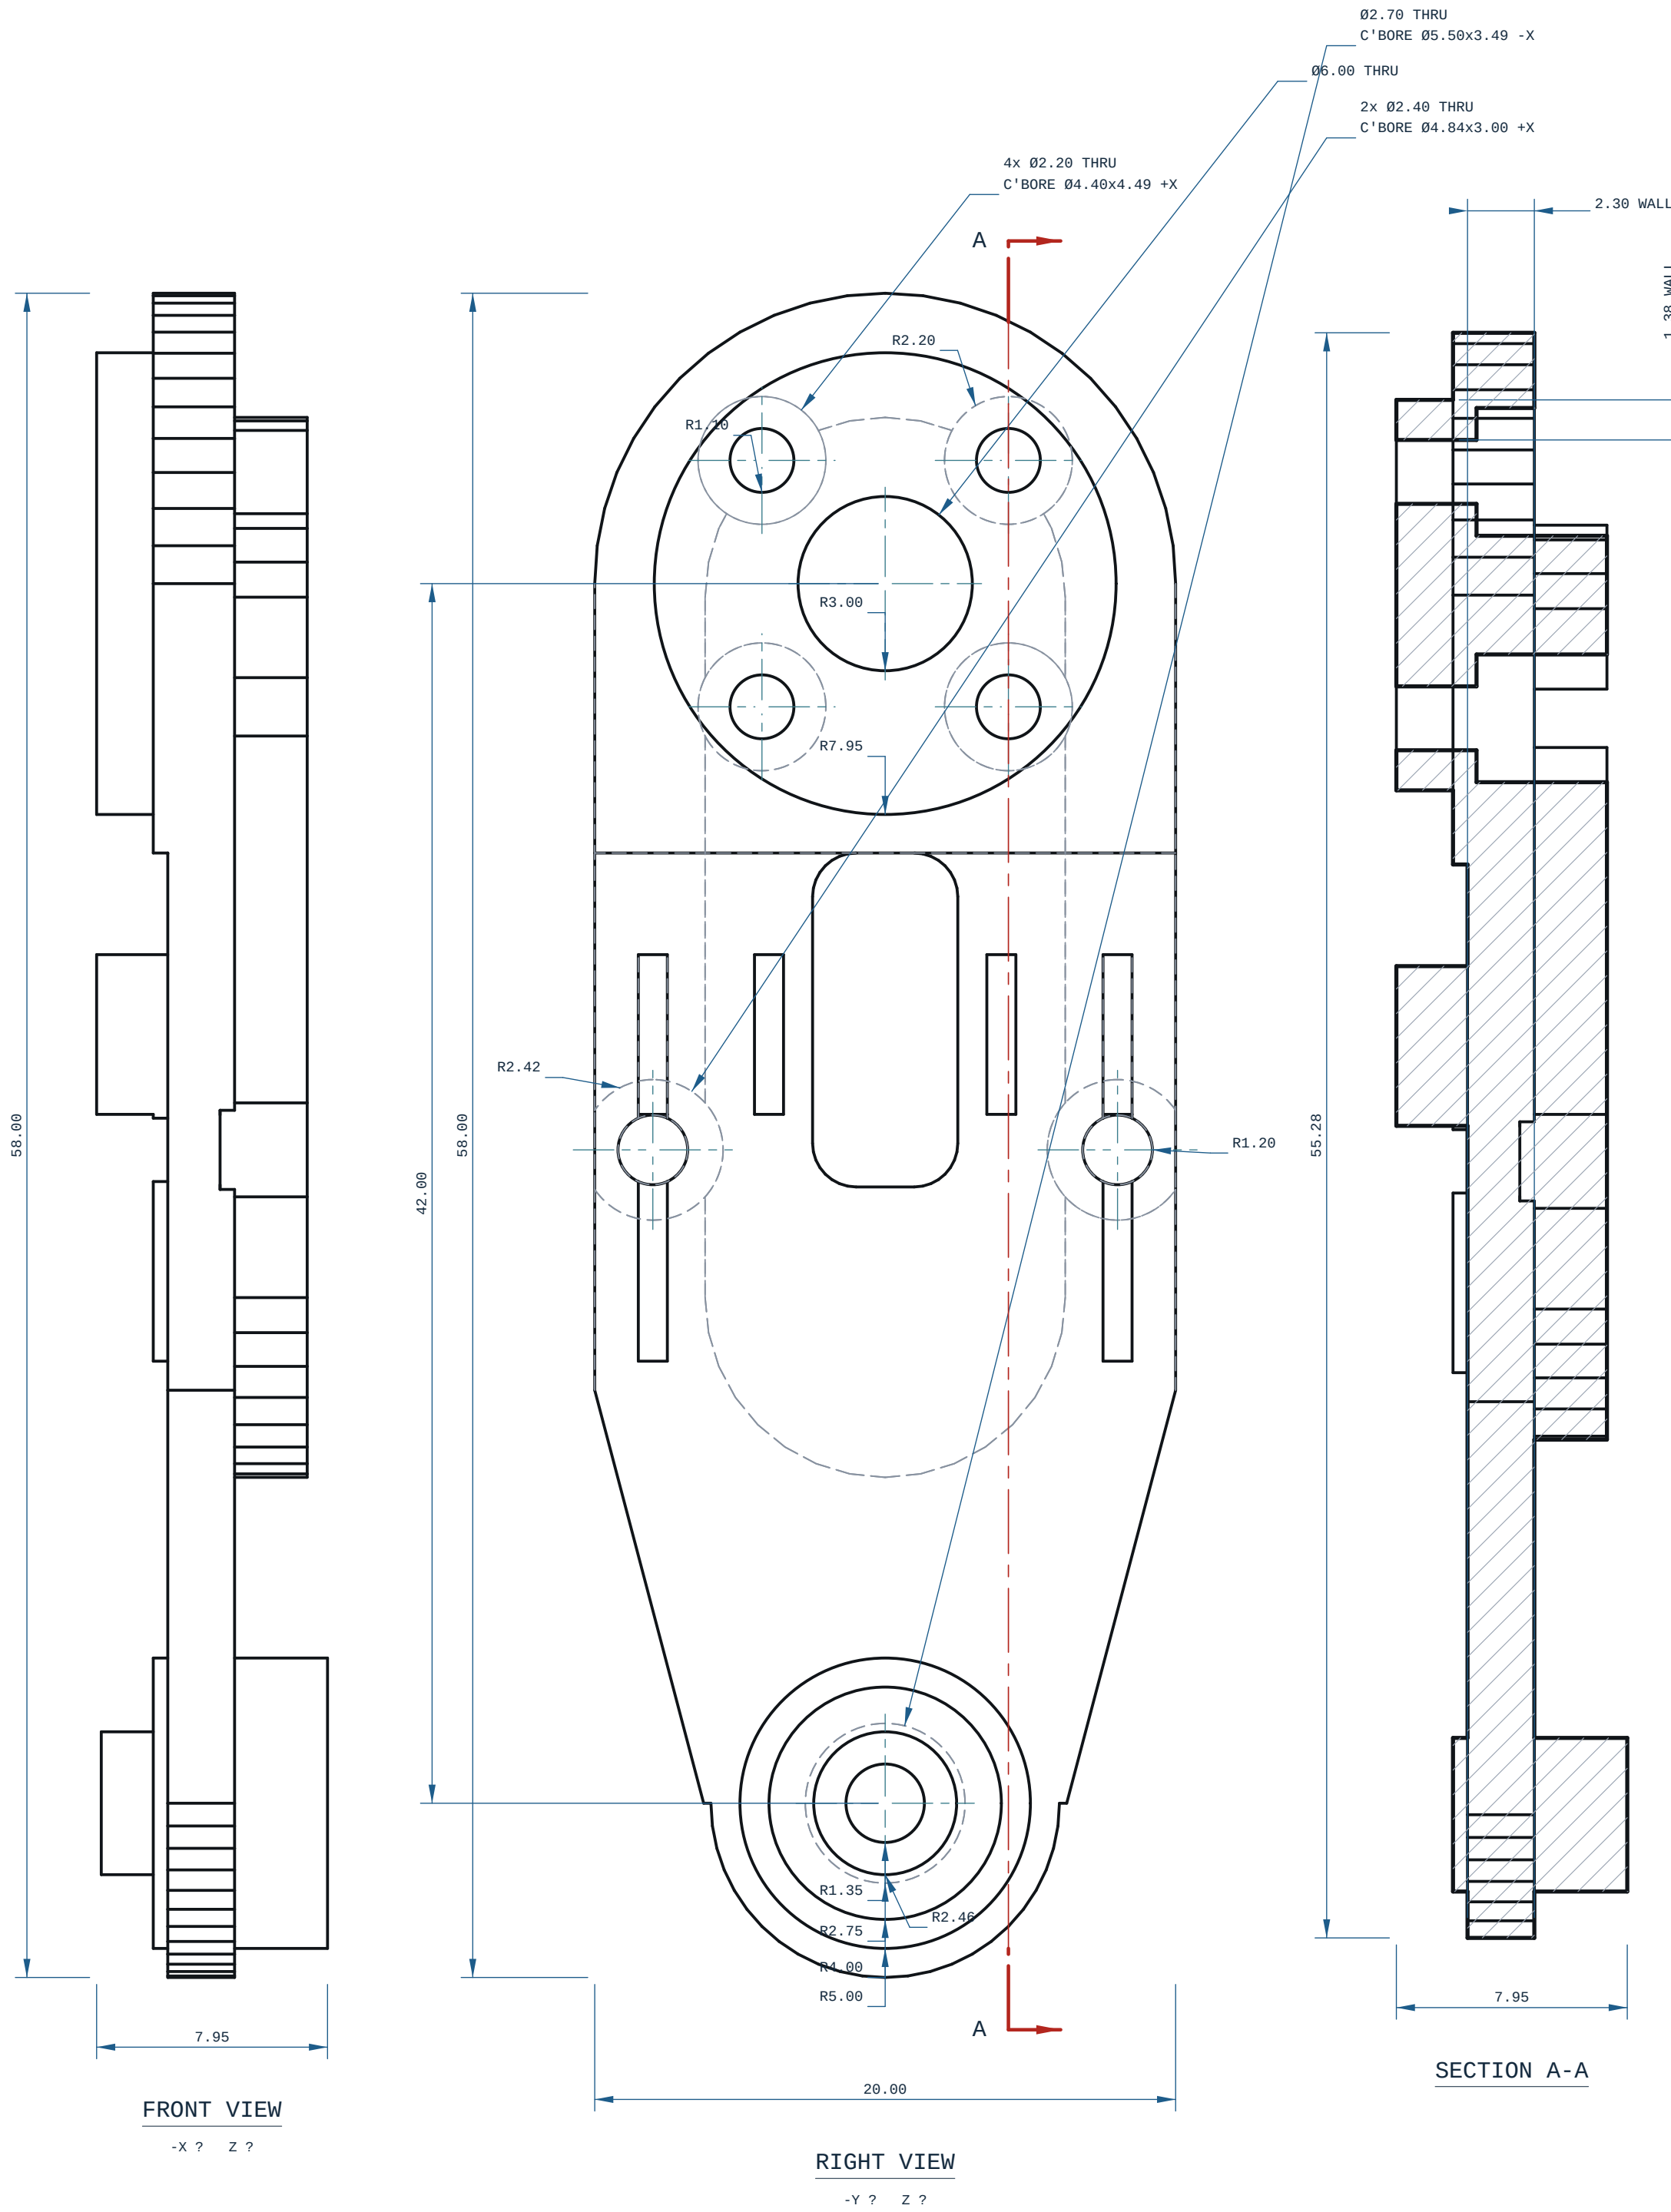

MICRODUCK - SHIN



REV
A

MATERIAL		PROCESS	SCALE
PLA		FDM	5:1
CATEGORY	GENERAL TOL	FINISH	SHEET
bracket	CANNOT DETERMINE ?~	AS PRINTED	A1 1/1
VOLUME (MEASURED)	MASS (ASSUMES PLA)		UNITS
3.39 cm3	4.2 g		mm / deg
SIZE (BOX, MEASURED)	DRAW		PROJECTION
7.95 x 20.00 x 58.00	ce-cad 2026-09-03		THIRD ANGLE
SOURCE (DESIGN FILE)			
ce-parts/microduck-shin/current/cad/part.py			