



microduck-speaker SCALE 2:1 A3 THIRD ANGLE

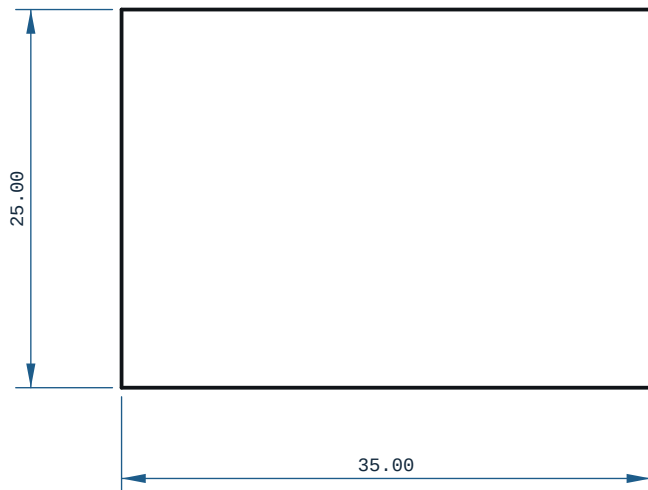

TOP VIEW

X ? Y ?

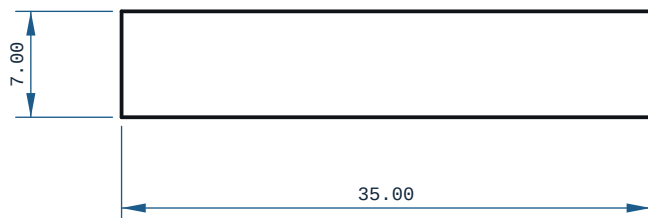


FRONT VIEW

-X ? Z ?




RIGHT VIEW

-Y ? Z ?

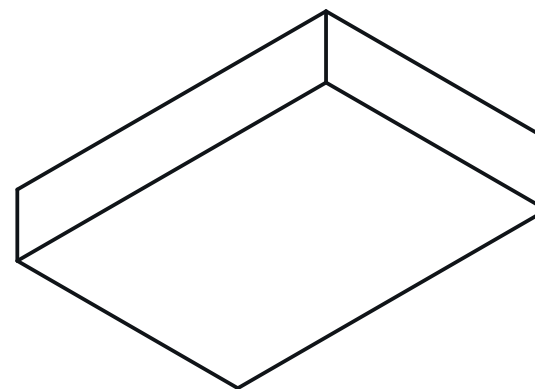

ISOMETRIC VIEW

35.00 x 25.00 x 7.00 mm



REFERENCE RENDER (ISO2) ? rendered off this solid,
900 x 680 px

NOTES

1. ALL DIMENSIONS IN mm AND DEGREES. EVERY DIMENSION AND EVERY HOLE CALLOUT WAS MEASURED OFF THE SOLID.
2. THINNEST WALL, WHOLE SOLID (RAY MINIMUM): 7.0000 mm, AT X=2.917 Y=-15.104 Z=0.000 ? MEASURED OVER THE WHOLE SOLID BY RAY=EXACT AT 0.6570 mm SAMPLE SPACING (A FEATURE NARROWER THAN THAT CAN BE MISSED). THIS IS A DISTANCE THROUGH MATERIAL, NOT A WALL: AT AN EDGE, A FILLET RUN-OUT OR A CHAMFER TIP IT IS REAL AND UNPRINTABLE BY DEFINITION. DO NOT JUDGE PRINTABILITY BY IT ? THE NEXT NOTE IS THE ONE THAT DOES.
3. PRINTABLE MINIMUM WALL: CANNOT DETERMINE ? no ray fired into this solid came back out of a wall within 4.000 mm ? every wall on it is thicker than the cap, or it is not a closed solid. MEASURED AS THE SMALLEST MEDIAN WALL OVER A NEIGHBOURHOOD OF ? mm ($\geq$? SAMPLES), RAYS CAPPED AT 4.000 mm, BY cecad.inspect.printable_wall_detail. WHAT SETTLES IT: a printed and sectioned coupon of the thinnest feature.
4. FEATURE CENSUS, MEASURED OFF THE SOLID: 0 HOLES, 0 ARC RADII IN THE R0.20..R60.00 BAND, 0 SLOTS, 0 GROOVES. THERE IS NO HOLE TABLE, NO SECTION AND NO R LEADER ON THIS SHEET BECAUSE THE PART HAS NONE OF THOSE FEATURES ? NOT BECAUSE THE DRAWING DROPPED THEM. THE OUTLINE AND THE ENVELOPE ARE THE WHOLE OF ITS GEOMETRY.
5. DETAIL CALLOUTS (MANUFACTURING-REQUIREMENTS A.): NONE ON THIS SHEET, AND NONE WAS PROPOSED ?
cecad.autosheet.detail (regions FOUND NO CLUSTER OF SMALL FEATURES DENSE ENOUGH TO BE WORTH ENLARGING ON THIS SOLID. EVERY FEATURE IS DIMENSIONED IN THE ORTHOGRAPHIC VIEWS AND THE HOLE TABLE.
6. GENERAL TOLERANCE CANNOT DETERMINE ? SEE PRINT / DFM NOTES UNLESS SPECIFIED.
7. FRONT VIEW: hidden lines SUPPRESSED: all 60 edge samples still land on drawn ink without them.
8. TOP VIEW: hidden lines SUPPRESSED: all 60 edge samples still land on drawn ink without them.
9. RIGHT VIEW: hidden lines SUPPRESSED: all 60 edge samples still land on drawn ink without them.

PRINT / DFM

1. ORIENTATION: laid flat (35 x 25 x 7 mm)
2. THINNEST WALL, WHOLE SOLID (OWN HENRICHSEN): 7.000 mm ± a distance through material, NOT a printable wall where it falls on an edge, a fillet run-out or a chamfer tip.
Printability is judged on the next line.

MICRODUCK-SPEAKER

MATERIAL		PROCESS	SOLID. EVERY FEATURE IS DIMENSIONED IN THE ORTHOGRAPHIC VIEWS AND THE HOLE TABLE.	
ABS		-	SCALE 1:1 6. GENERAL TOLERANCE CANNOT DETERMINE ? SEE PRINT / DFM	
CATEGORY	GENERAL TOL	FINISH	NOTES UNLESS STATED.	
speaker	CANNOT DETERMINE ?	AS PRINTED	7. FRONT VIEW: hidden lines SUPPRESSED: all 60 edge samples still land on drawn ink without them.	
VOLUME (MEASURED)		MASS (ASSUMES ABS)	8. TOP VIEW: hidden lines SUPPRESSED: all 60 edge samples still land on drawn ink without them.	
6.12 cm3		6.4 g	9. RIGHT VIEW: hidden lines SUPPRESSED: all 60 edge samples still land on drawn ink without them.	
SIZE (BBOX, MEASURED)		DRAWN	THIRD ANGLE	
35.00 x 25.00 x 7.00		ce-cad 2026-09-03	PRINT / DFM	
SOURCE (DESIGN FILE)			1. ORIENTATION: laid flat (35 x 25 x 7 mm)	
ce-parts/microduck-speaker/current/cad/part.py				