



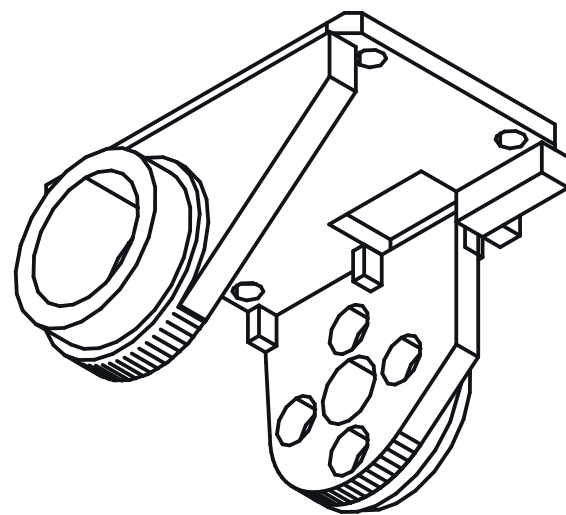

ISOMETRIC VIEW

34.00 x 35.89 x 22.50 mm



REFERENCE RENDER (ISO2) ? rendered off this solid,
900 x 600 px

HOLE TABLE ? 6 POSITIONS

TAG	SIZE	X	Z	C* BORE
A1	Ø2.20 THRU	0.00	10.50	Ø4.40x2.60 -Y
A2	Ø2.20 THRU	6.00	4.50	Ø4.40x2.60 -Y
A3	Ø12.00 THRU	0.00	4.50	-
A4	Ø6.00 THRU	0.00	4.50	-
A5	Ø2.20 THRU	-6.00	4.50	Ø4.40x2.60 -Y
A6	Ø2.20 THRU	0.00	-1.50	Ø4.40x2.60 -Y


every row measured off the solid; positions are model coordinates, mm. C'BORE side is the face it opens on; INT = centred in the bore, opening on neither face.

NOTES

1. ALL DIMENSIONS IN MM AND DEGREES. EVERY DIMENSION AND EVERY HOLE CALLOUT WAS MEASURED OFF THE SOLID.
2. PROCESS: FDM.
3. THINNESS WALL, WHOLE SOLID (RAY MINIMUM: 0.5750 mm, AT X=0: MIN=0.5710, Z=1.000) WAS MEASURED OVER THE WHOLE SOLID BY RAY-EXACT AT 1.2760 mm SAMPLE SPACING (A FEATURE NARROWER THAN THAT CAN BE MISSED). THIS IS A DISTANCE THROUGH MATERIAL, NOT A WALL: AT AN EDGE, A FILLET RUN-OUT OR A CHAMFER TIP IT IS REAL AND UNPRINTABLE BY DEFINITION. DO NOT JUDGE PRINTABILITY BY IT.
4. PRINTABLE MINIMUM WALL: 1.5170 mm, AT X=9.911=0.6, 8.99 Z=17.090 = MEASURED AS THE SMALLEST MEDIAN WALL OVER A NEIGHBOURHOOD OF 3.8270 mm (≈ 8 SAMPLES), RAYS CAPPED AT 4.000 mm, BY cecad.incsprint.wall.detail.
- AGAINST THE 0.8000 mm FLOOR (2 PERIMETERS @ 0.4 mm NOZZLE, cecad/printed.py:8081): VERDICT PASS
5. DETAIL: 0.1270 mm WALL THICKNESS DETAIL: 0.1270 mm. 0.1270 mm region needs 10: to beat the sheet's 5:1 by 2x and only 74 mm of the bottom band is free = it would be drawn the same size as the view it points at; DETAIL B dropped: a 5:1:0 mm region needs 10:1 to beat the sheet's 5:1:6 by 2x and only 74 mm of the bottom band is free = it would be drawn the same size as the view it points at; DETAIL C dropped: the 0.1270 mm regions ARE DRAWN AT THE SHEET SCALE ABOVE; NOTHING IS HIDDEN.
6. GENERAL TOLERANCE CANNOT DETERMINE ? SEE PRINT / DFM NOTES UNLESS STATED.
7. SECTION A-A AT X=0.00: THINNESS MATERIAL IN THIS PLANE FIRST 0.9170 mm, AT Y=34.45, Z=4.10 = F A SCAN OF ONE CUT, NOT A MEASURED VALUE.
8. FRONT VIEW: hidden lines KEPT: without them 19 of 532 edge samples have no ink within 0.35 mm (worst 1.646 mm) and the feature would be missing from the sheet.
9. TOP VIEW: hidden lines KEPT: without them 27 of 590 edge samples have no ink within 0.35 mm (worst 1.051 mm) and the feature would be missing from the sheet.
10. RIGHT VIEW: hidden lines KEPT: without them 8 of 594 edge samples have no ink within 0.35 mm (worst 0.599 mm) and the feature would be missing from the sheet.


PRINT / DEF

1. ORIENTATION: Laid flat (30.4 x 32 x 22 mm)
2. THINNESS WALL: WALL THICK (RAY MINIMUM): 0.7580 mm ?
on distance from material, NOT a printable wall where it
is on a different material, e.g. a chamfer fit
Printability is judged on the next line.
3. PRINTABLE MINIMUM WALL: 1.5170 mm (smallest median wall
over a 3.278 mm neighbourhood,
cead, inspect printable_wall_dz(1)) against a 0.8086
mm fillet (2 parameters for nozzle): VERDICT PASS
16 horizontal (0.01) bridge at the crown: 0.8 mm any
bearing or press-fit bore to size
5. FILAMENT: PLA, -5 g (modelled), 113 layers @ 0.2 mm
6. TOLERANCE BASIS, IN-FOCUS: CANNOT DETERMINE. Every
Bambu on this farm records tolerance mm: null, cite "no
tolerance" on print and add "on this machine"
(ce-machines/bambu-h2s-*,
bambu-h2d-/capabilities.json, read 2826-09-02), and
Bambu Lab's own H2D Pro spec sheet carries no
dimensional accuracy line. DIMENSIONS HERE ARE NOMINAL
AS MODELLLED
7. TOLERANCE BASIS, OUTSOURCED: JLC3DP 40.3 mm FDM
(JLC3DP.com, ce-machines/farm-jlc3dp); bambu 49.5k,
floor 49.5 mm (farms.com/3d-printing/,
ce-machines/farm-hubs). Apply the ruler's figure, not
both. The 40.2 mm in cead/machining.py fdm is a repo
artifact, constant in vendor/0.0.0 and NOT used here.
Only printed and measured coupon cross this note
8. NO ISO 286 CLASS IS DECLARED ON ANY BORE: FDM cannot be
sized to one (H7/p6 at 0.3 is a 0.010 mm band). REAM
bearing and press-fit bores after printing.
9. ORTHOGRAPHIC VIEWS: 3 (FRONT, TOP, RIGHT) ?
10. ORTHOGRAPHIC CHOICES: 100.0 x 100.0 x 35.950 mm
22.500 mm BBOX, THIN/LONG 0.6269. THE FULL THIR-D-ANGLE
SET IS DRAWN.

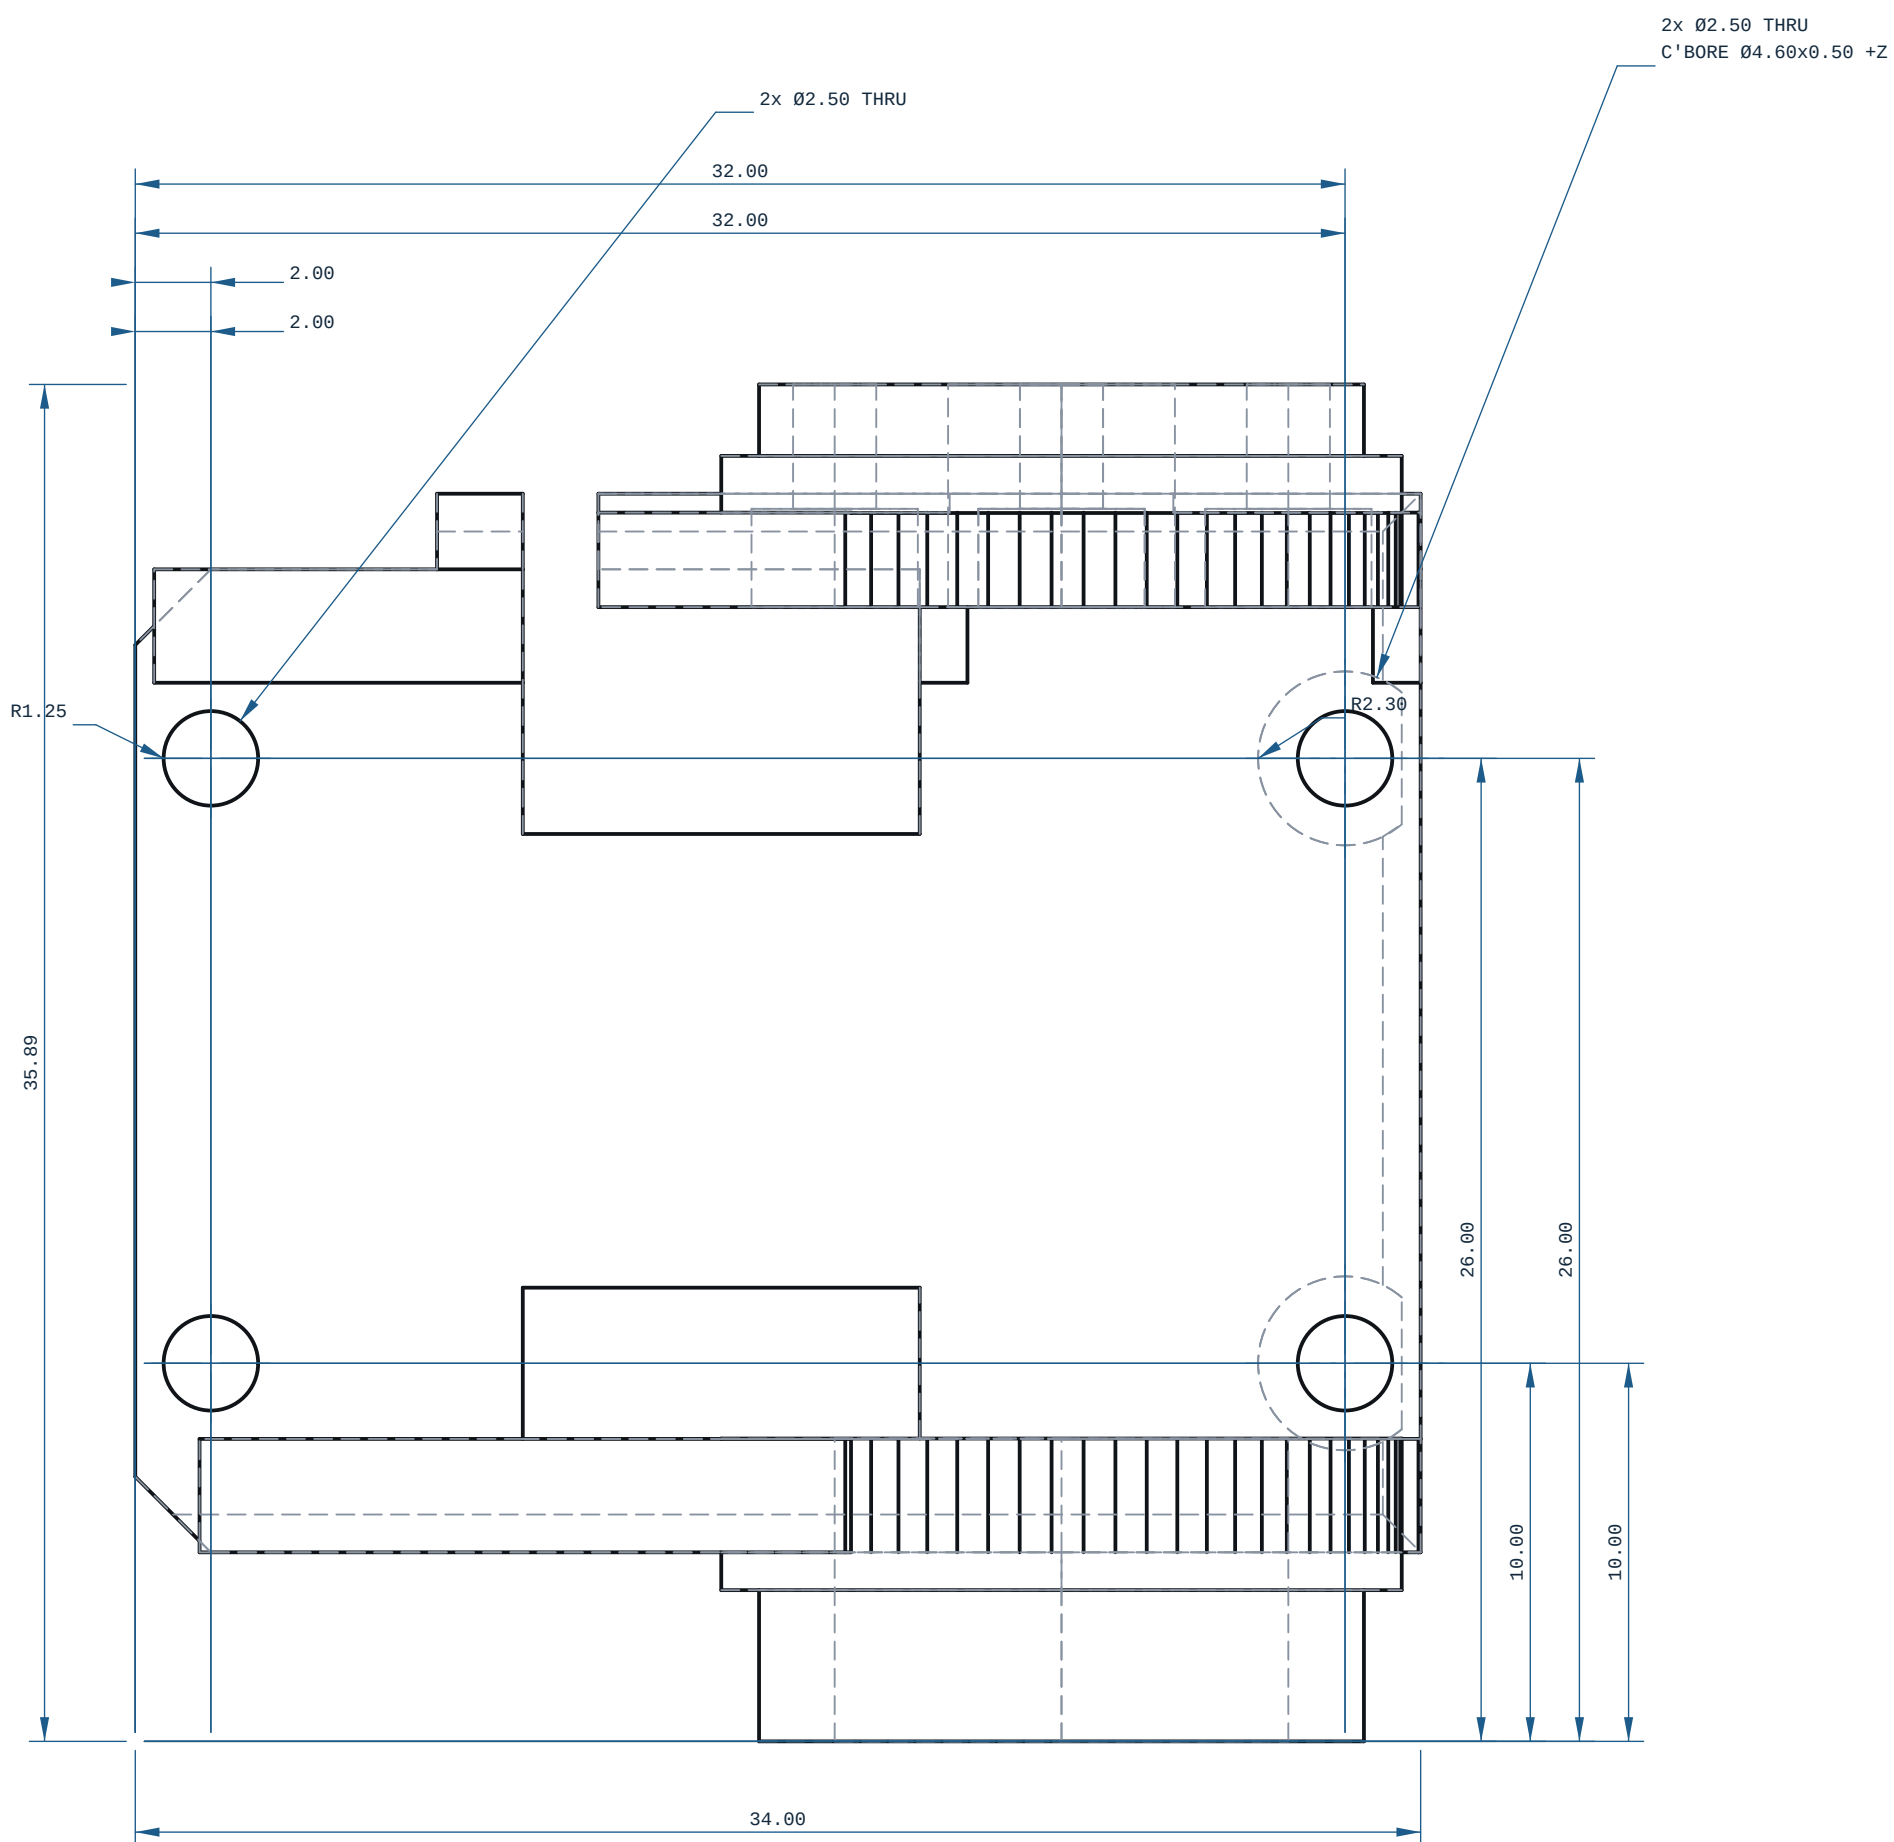


TOP VIEW

	X ?	Y ?
1	1	1
2	1	1
3	1	1
4	1	1
5	1	1
6	1	1
7	1	1
8	1	1
9	1	1
10	1	1
11	1	1
12	1	1
13	1	1
14	1	1
15	1	1
16	1	1
17	1	1
18	1	1
19	1	1
20	1	1
21	1	1
22	1	1
23	1	1
24	1	1
25	1	1
26	1	1
27	1	1
28	1	1
29	1	1
30	1	1
31	1	1
32	1	1
33	1	1
34	1	1
35	1	1
36	1	1
37	1	1
38	1	1
39	1	1
40	1	1
41	1	1
42	1	1
43	1	1
44	1	1
45	1	1
46	1	1
47	1	1
48	1	1
49	1	1
50	1	1
51	1	1
52	1	1
53	1	1
54	1	1
55	1	1
56	1	1
57	1	1
58	1	1
59	1	1
60	1	1
61	1	1
62	1	1
63	1	1
64	1	1
65	1	1
66	1	1
67	1	1
68	1	1
69	1	1
70	1	1
71	1	1
72	1	1
73	1	1
74	1	1
75	1	1
76	1	1
77	1	1
78	1	1
79	1	1
80	1	1
81	1	1
82	1	1
83	1	1
84	1	1
85	1	1
86	1	1
87	1	1
88	1	1
89	1	1
90	1	1
91	1	1
92	1	1
93	1	1
94	1	1
95	1	1
96	1	1
97	1	1
98	1	1
99	1	1
100	1	1

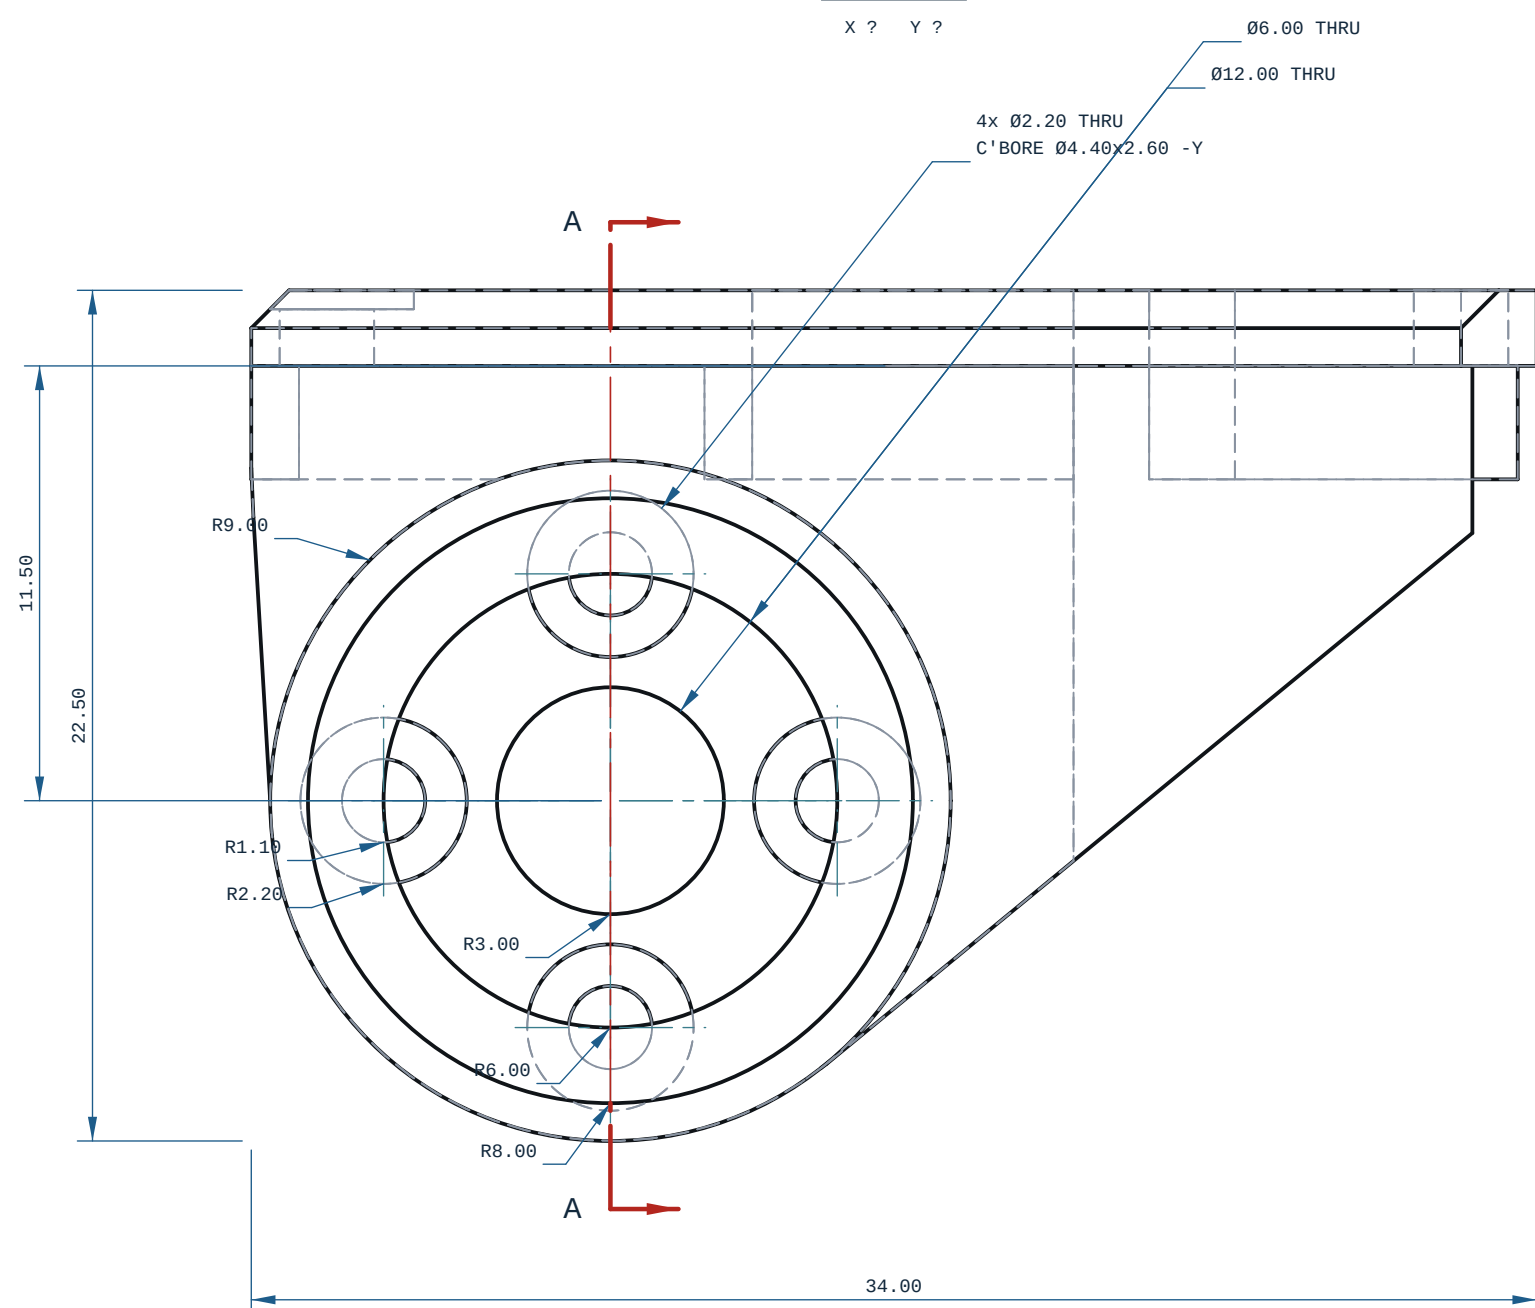


FRONT VIEW

- X 2 7 2

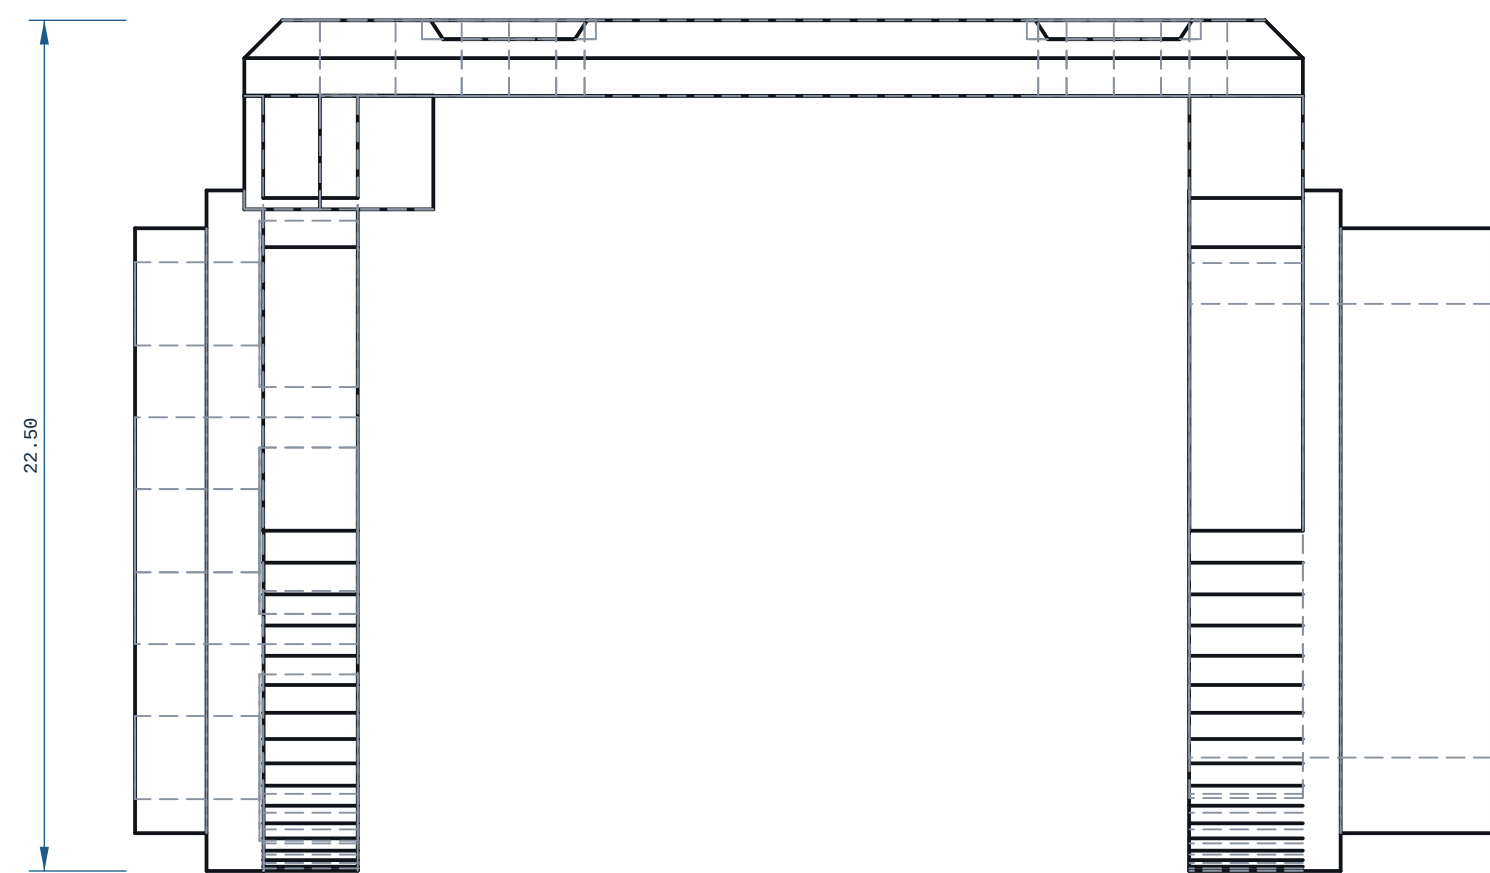

RIGHT VIEW

-Y ? Z ?

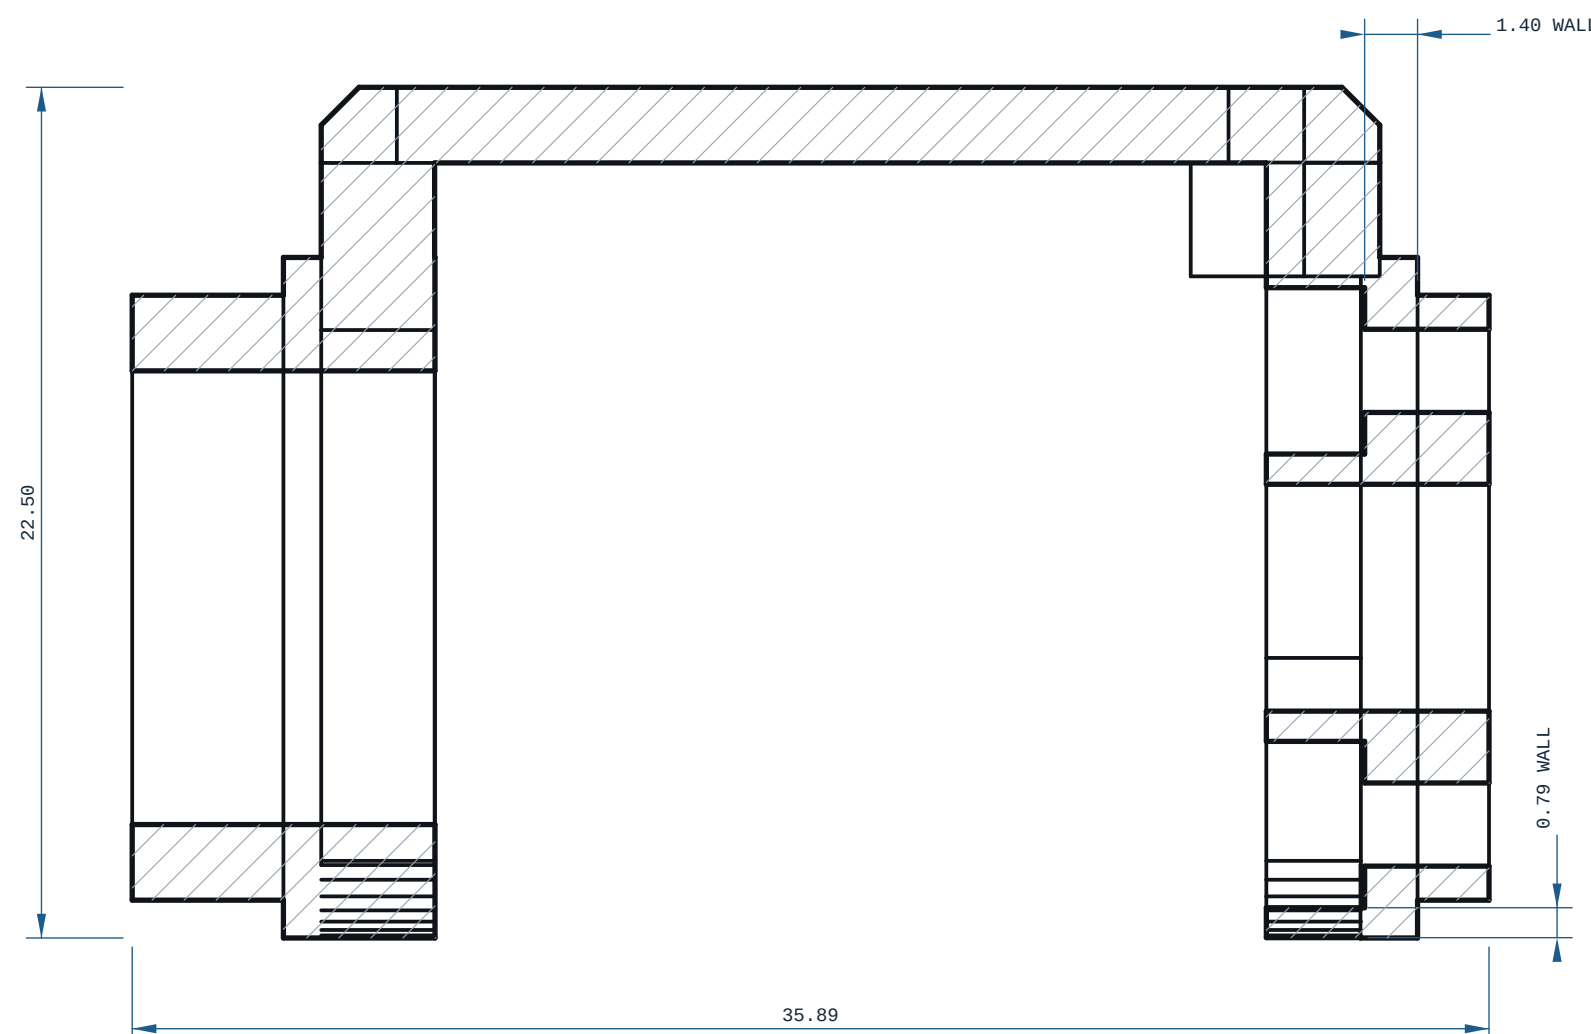

SECTION A-A

MICRODUCK-YAW-ROLL-MOTION



REV

A

MATERIAL		PROCESS	SCALE
PLA		FDM	5:1
CATEGORY	GENERAL TOL	FINISH	SHEET
bracket	CANNOT DETERMINE 7-	AS PRINTED	A1 1/1
VOLUME (HEASURED)		MASS (ASSUMES PLA)	UNITS
4.63 cm3		5.7 g	mm / deg
SIZE (BBOX, HEASURED)		WEIGHT	PROJECTION
34.00 x 35.89 x 22.50		CE-cad 2026-09-03	THIRD ANGLE
SOURCE (DESIGN FILE)			
ce-parts/microduck-yaw-roll-motion/current/cad/part.py			