



SHIN ? NOMINAL mm
outline envelope length 7.9500
outline envelope width 20.0000
outline envelope height 58.0000
hole 1 diameter (along x) 06.0000
hole 1 depth 7.2500
hole 1 position from the Y datum face 10.0000
hole 1 position from the Z datum face 48.0000
counterbore 2 diameter (along x) 05.5000
counterbore 2 depth 3.4000
counterbore 2 position from the Y datum face 10.0000
counterbore 2 position from the Z datum face 6.0000
counterbore 3 diameter (along x) 04.8400
counterbore 3 depth 3.0000
counterbore 3 position from the Y datum face 2.0000
counterbore 3 position from the Z datum face 20.0000
counterbore 4 diameter (along x) 04.8400
counterbore 4 depth 3.0000
counterbore 4 position from the Y datum face 18.0000
counterbore 4 position from the Z datum face 28.5000

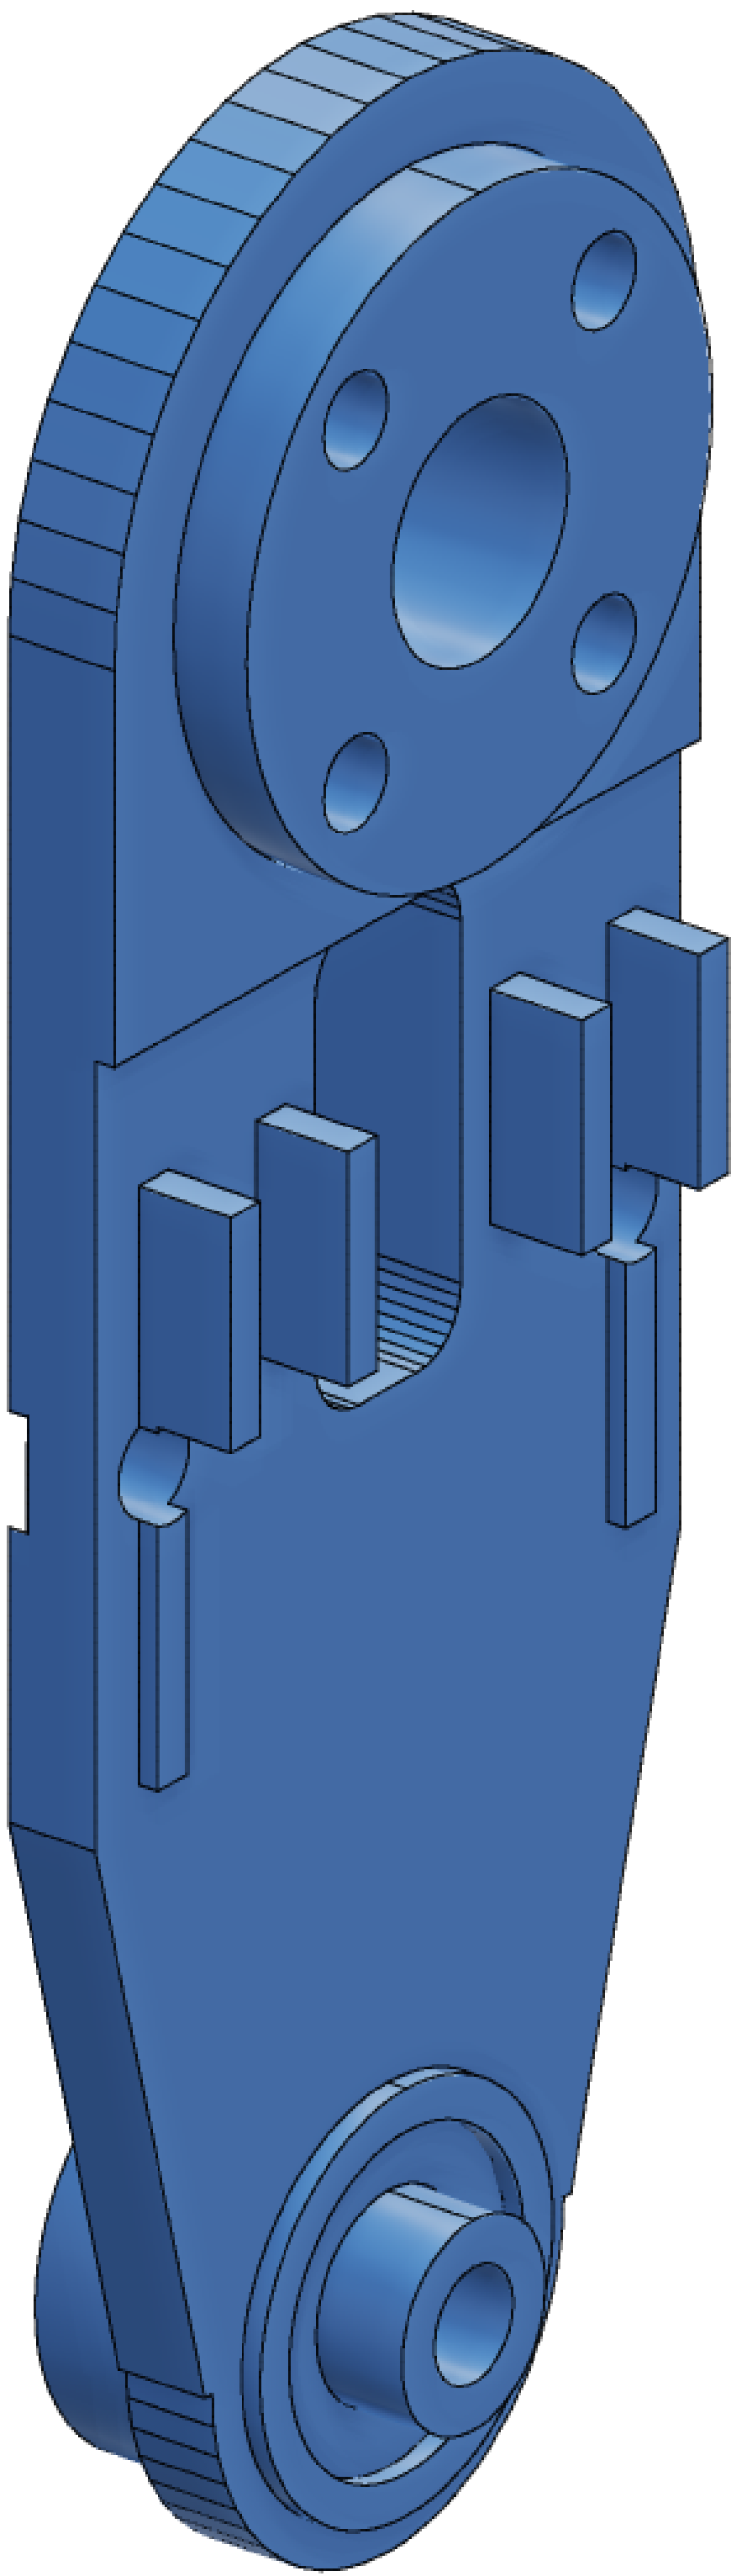


ISOMETRIC 1 FRONT LEFT

CANNOT DETERMINE ? chamfer: A4 requires size and angle on every chamfer;
cecad.inspect has no chamfer classifier ? a chamfer is a planar face bridging two faces at an angle and nothing here identifies one SETTLED BY: a chamfer classifier in cecad.inspect (planar face whose two neighbours meet it at equal angles), or the builder declaring its chamfers in the part record

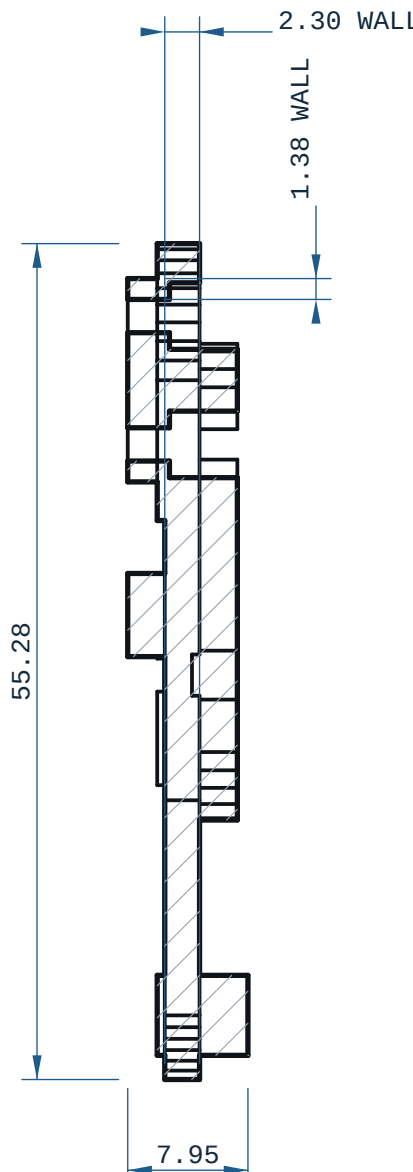


SECTION A-A

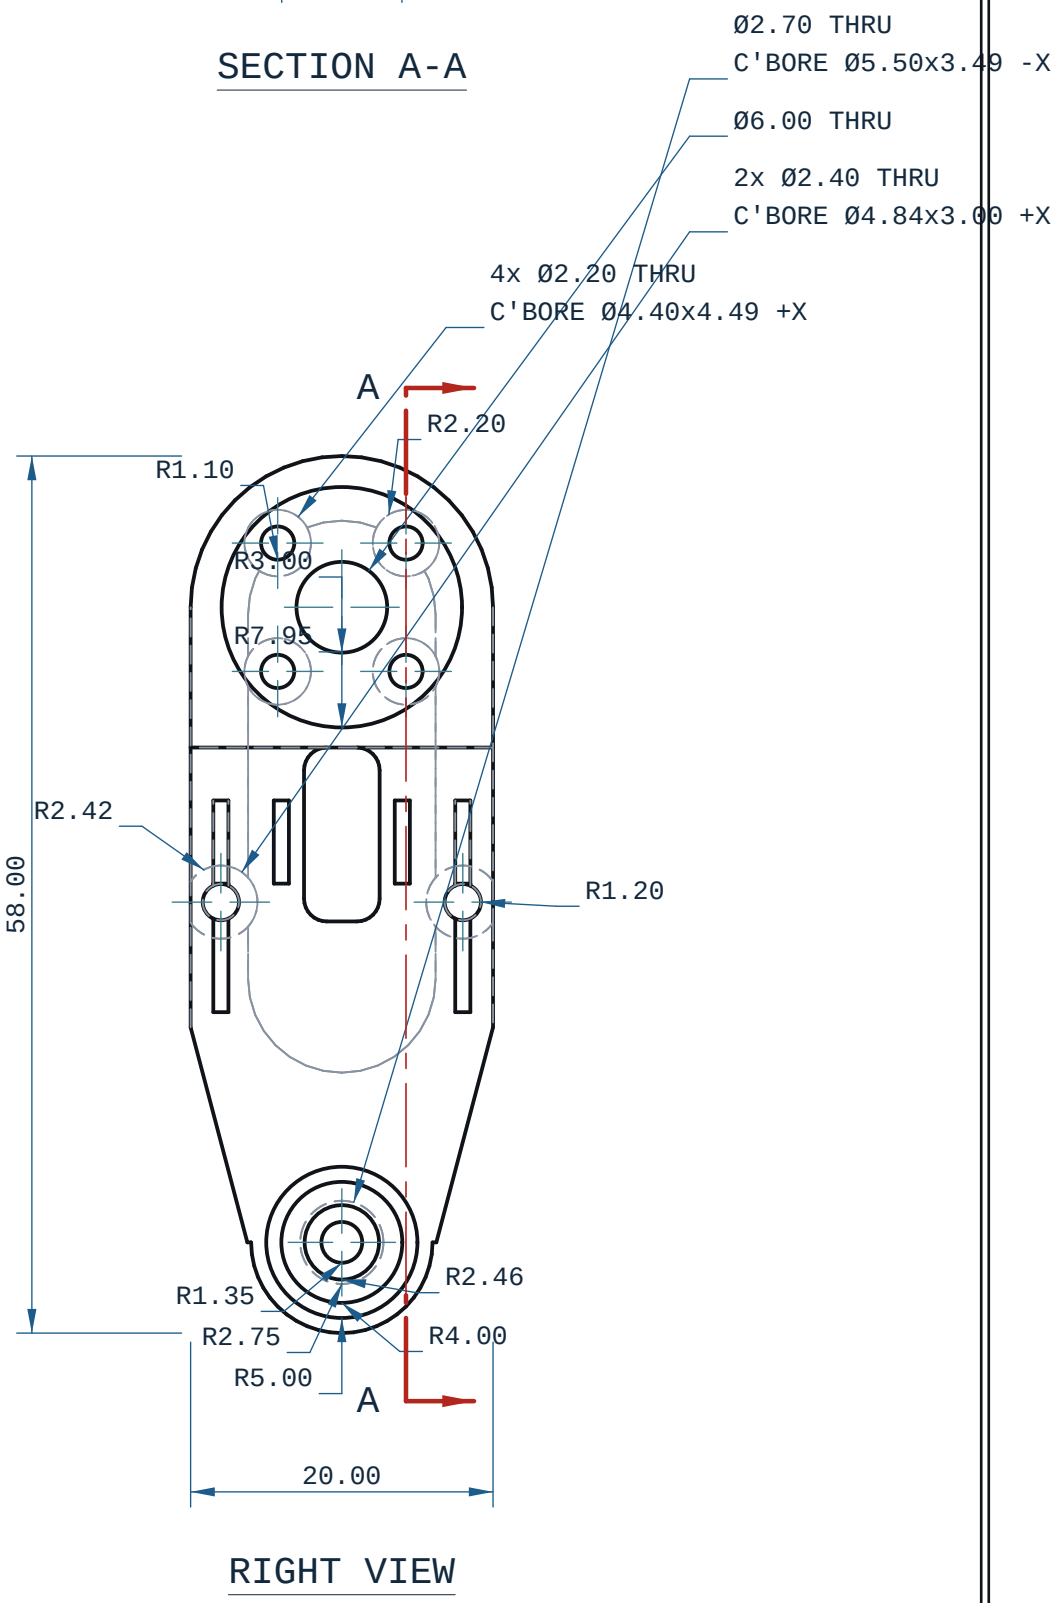


RIGHT VIEW

MEASURED FEATURES ? mm
counterbore 5 diameter (along x) 04.4000
counterbore 5 depth 4.4000
counterbore 5 position from the Y datum face 5.7570
counterbore 5 position from the Z datum face 43.7570
counterbore 6 diameter (along x) 04.4000
counterbore 6 depth 4.4000
counterbore 6 position from the Y datum face 5.7570
counterbore 6 position from the Z datum face 52.2430
counterbore 7 diameter (along x) 04.4000
counterbore 7 depth 4.4000
counterbore 7 position from the Y datum face 14.2430
counterbore 7 position from the Z datum face 43.7570
counterbore 8 diameter (along x) 04.4000
counterbore 8 depth 4.4000
counterbore 8 position from the Y datum face 14.2430
counterbore 8 position from the Z datum face 52.2430
hole 9 diameter (along x) 02.7000
hole 9 depth 4.3000
hole 9 position from the Y datum face 10.0000

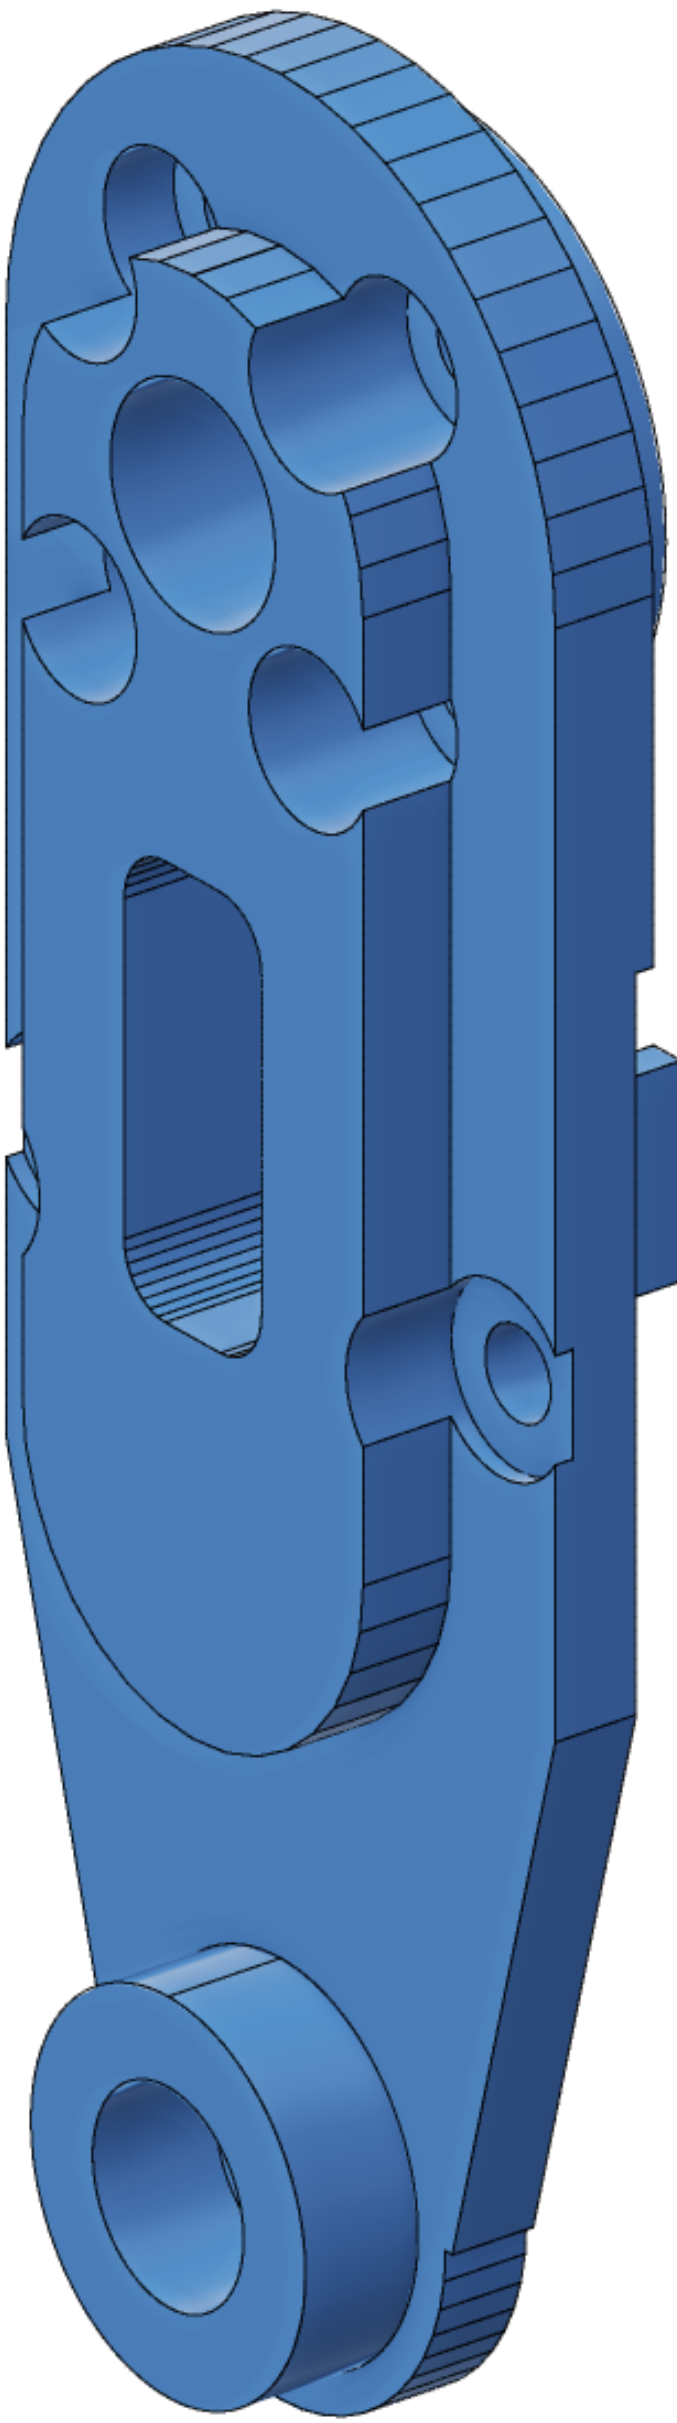


ISOMETRIC 2 FRONT RIGHT

CANNOT DETERMINE ? rib: A4 requires thickness, height and pitch on every rib; nothing here groups faces into a rib
SETTLED BY: a rib classifier (parallel thin prisms standing off a wall), or the builder declaring its rib pitch

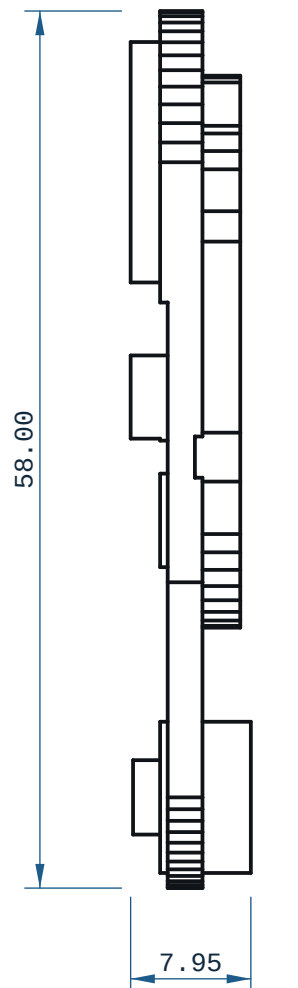

FRONT VIEW

MEASURED FEATURES ? mm
hole 9 position from the Z datum face 6.0000
hole 10 diameter (along x) 02.4000
hole 10 depth 2.3000
hole 10 position from the Y datum face 2.0000
hole 10 position from the Z datum face 28.5000
hole 11 diameter (along x) 02.4000
hole 11 depth 2.3000
hole 11 position from the Y datum face 18.0000
hole 11 position from the Z datum face 28.5000
hole 12 diameter (along x) 02.2000
hole 12 depth 2.7000
hole 12 position from the Y datum face 5.7570
hole 12 position from the Z datum face 43.7570
hole 13 diameter (along x) 02.2000
hole 13 depth 2.7000
hole 13 position from the Y datum face 5.7570
hole 13 position from the Z datum face 52.2430
hole 14 diameter (along x) 02.2000
hole 14 depth 2.7000

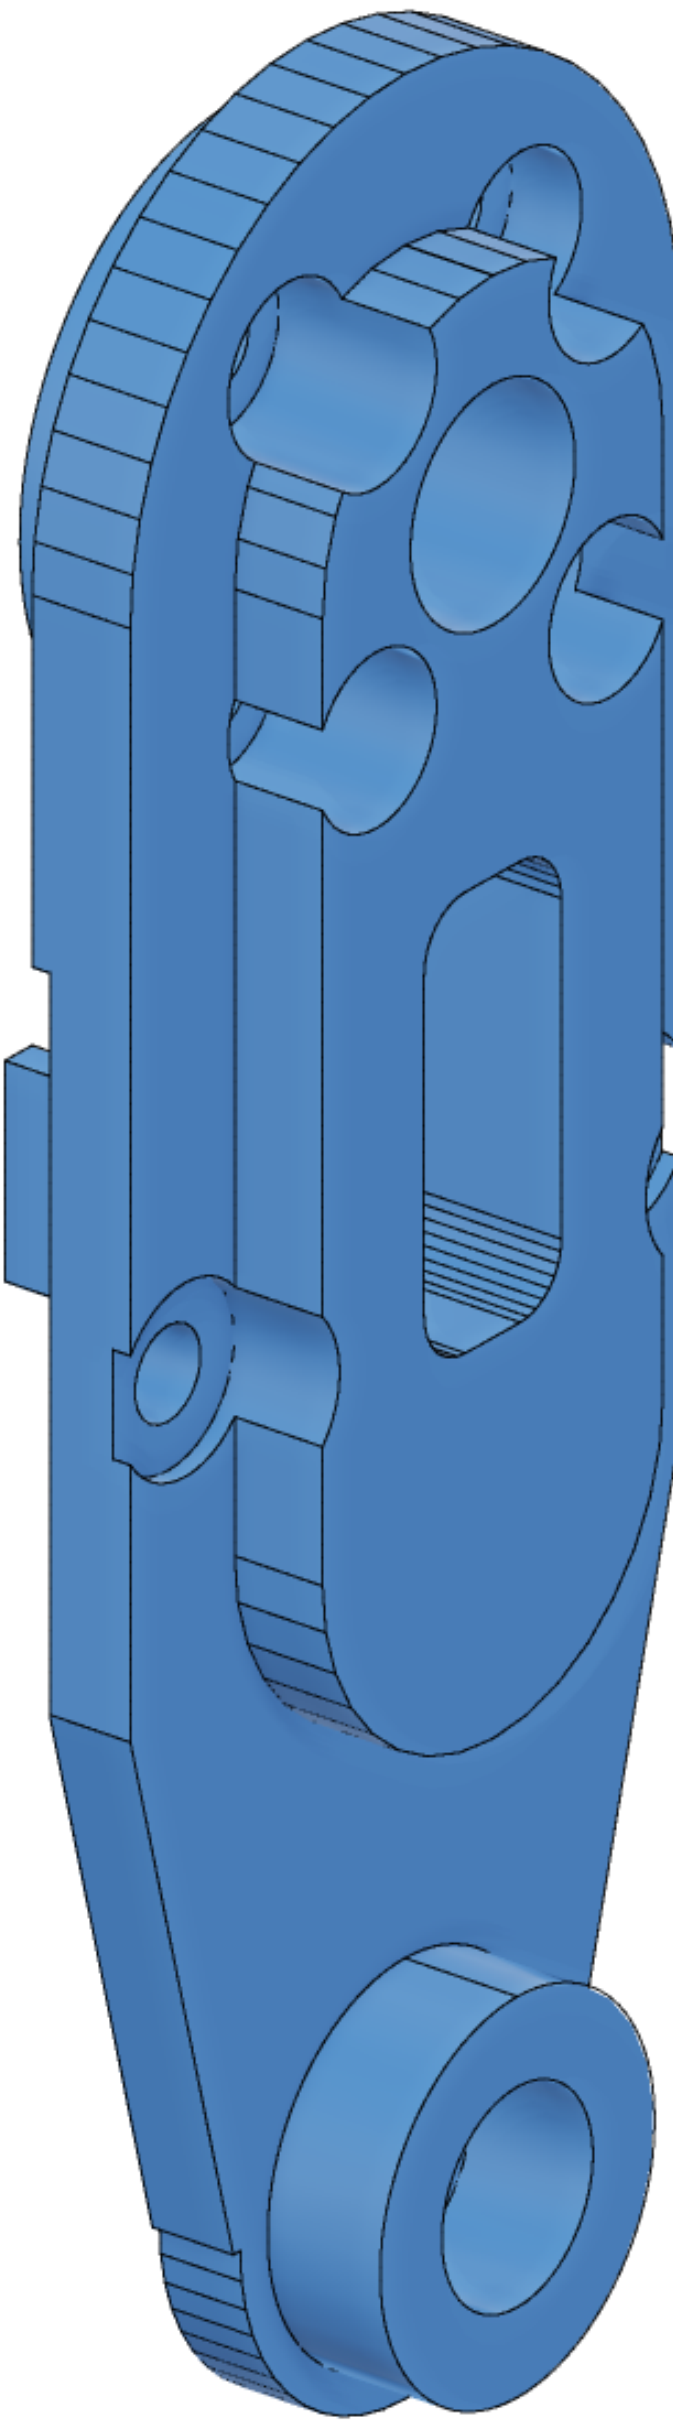

ISOMETRIC 3 REAR RIGHT

HOLE TABLE ? 8 POSITIONS


TAG	SIZE	Y	Z	C'BORE
A1	02.20 THRU	26.24	48.02	04.40x4.49 +X
A2	02.20 THRU	17.76	48.02	04.40x4.49 +X
A3	06.00 THRU	22.00	35.78	-
A4	02.20 THRU	26.24	31.53	04.40x4.49 +X
A5	02.20 THRU	17.76	31.53	04.40x4.49 +X
A6	02.40 THRU	30.00	16.28	04.84x3.00 +X
A7	02.40 THRU	14.00	16.28	04.84x3.00 +X
A8	02.70 THRU	22.00	-6.22	05.50x3.49 -X

every row measured off the solid; positions are mm coordinates, mm. C'BORE side is the face it opens on
INT = centred in the bore, opening on neither face

MICRODUCK SHIN

2:1
A0 / THIRD ANGLE / mm
7.95 x 20.00 x 58.00
3.39 cm3
CAD SOURCE: part:microduck-shin
DATUM: XYZ MINIMUM ENCLOSED PLANES
XYZ origin mm: 32.5000, 12.0000, -12.2230
GENERAL TOLERANCE CANNOT DETERMINE ? SEE PRINT / DFM NOTES UNLESS STATED.
EXPERIMENTAL ? NOT RELEASED


MEASURED FEATURES ? mm
hole 14 position from the Y datum face 14.2430
hole 14 position from the Z datum face 43.7570
hole 15 diameter (along x) 02.2000
hole 15 depth 2.7000
hole 15 position from the Y datum face 14.2430
hole 15 position from the Z datum face 52.2430
groove 1 outer 0 08.0000
groove 1 core 0 04.9200
groove 1 depth 0.5000
boss / outside diameter 1 015.0000
boss 1 length along its axis 1.9500
boss / outside diameter 2 010.0000
boss 2 length along its axis 3.2000
boss / outside diameter 3 010.0000
boss 3 length along its axis 0.5000
boss / outside diameter 4 04.9200
boss 4 length along its axis 2.2900
radius R1.10 (8 edges, 8 full circles) R1.1000
radius R1.20 (6 edges, 2 full circles) R1.2000

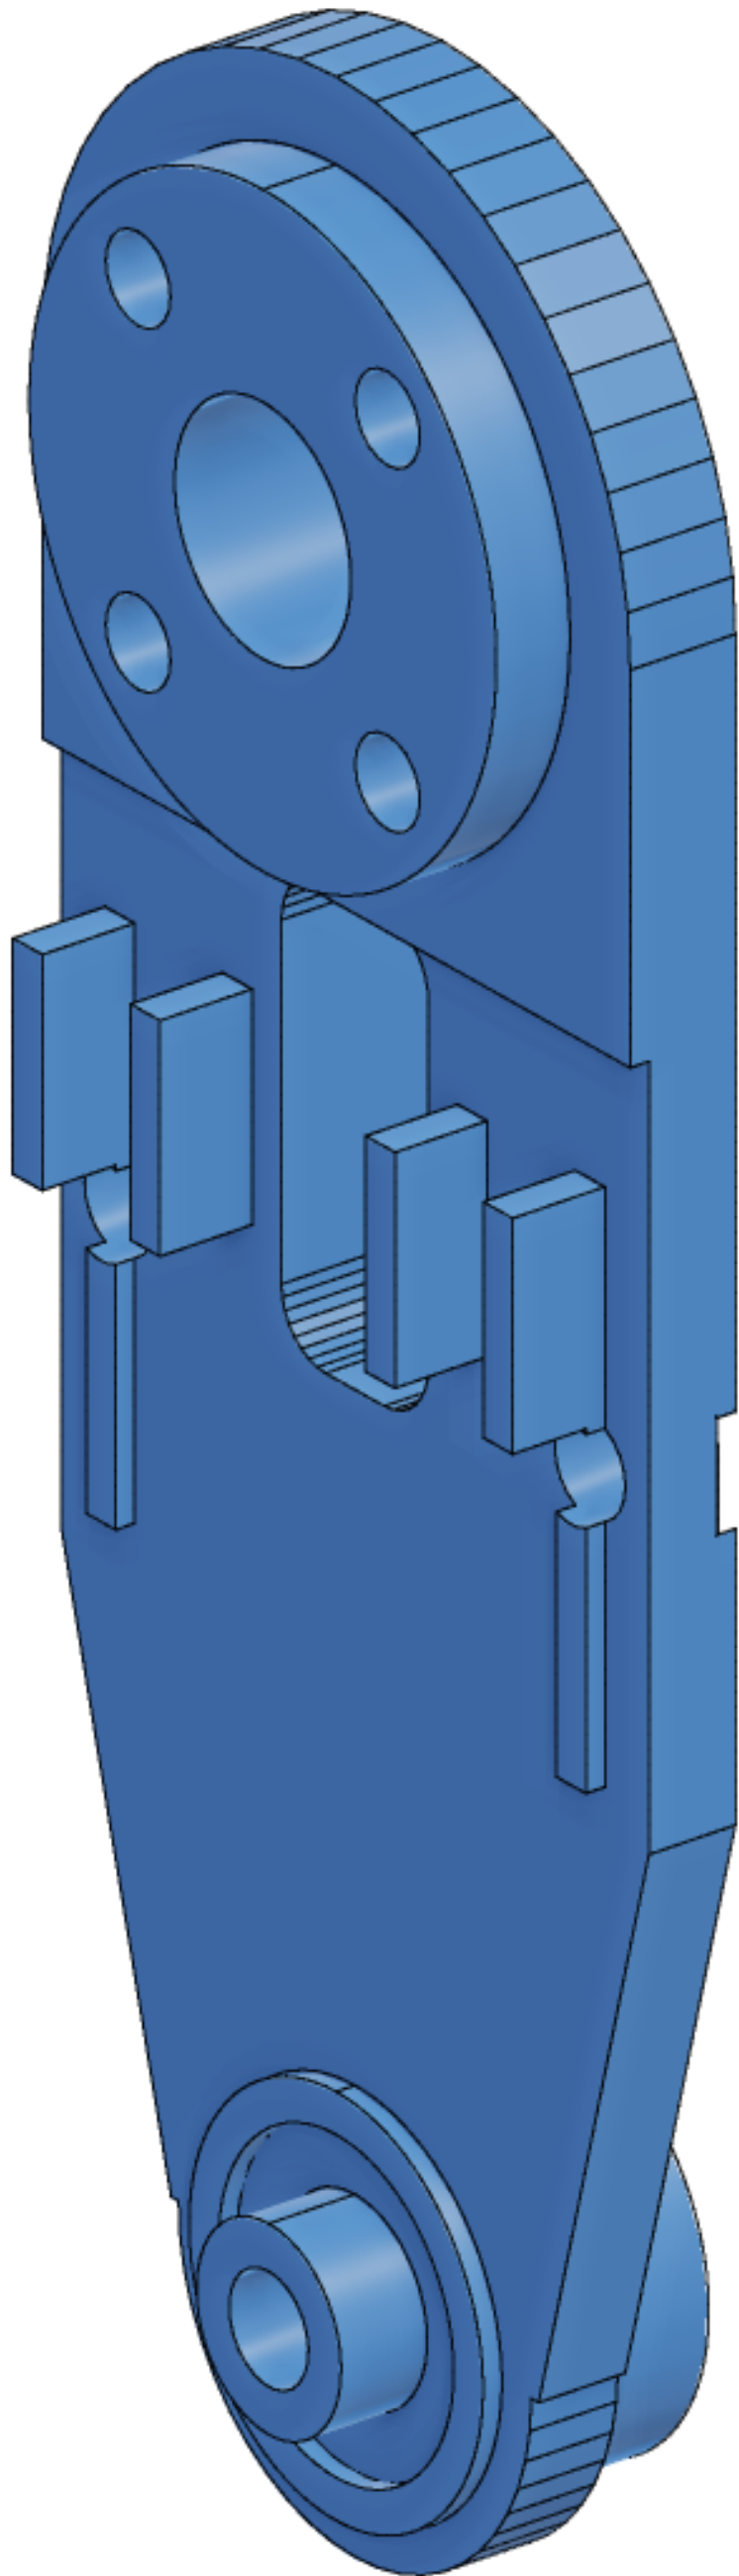

ISOMETRIC 4 REAR LEFT

CANNOT DETERMINE ? step: A4 requires every step and shoulder; nothing here classifies a shoulder between two coaxial diameters or two parallel faces SETTLED BY: a step classifier, or the section views declaring their stations

MEASURED FEATURES ? mm
radius R1.35 (2 edges, 2 full circles) R1.3500
radius R2.20 (12 edges, 4 full circles) R2.2000
radius R2.42 (6 edges, 0 full circles) R2.4200
radius R2.46 (2 edges, 2 full circles) R2.4600
radius R2.75 (2 edges, 2 full circles) R2.7500
radius R3.00 (2 edges, 2 full circles) R3.0000
radius R4.00 (2 edges, 2 full circles) R4.0000
radius R5.00 (4 edges, 4 full circles) R5.0000
radius R7.95 (2 edges, 2 full circles) R7.9500
thinnest wall 0.0200
slot mouth on a plane normal to x, 8 edge(s) ? 2.4000
width 2.4000
slot mouth on a plane normal to x, 8 edge(s) ? 14.0000
length 2.4500
slot mouth on a plane normal to x, 8 edge(s) ? 2.0000
position from the y datum 28.2230
slot mouth on a plane normal to x, 4 edge(s) ? 1.0000
width 5.5000
length 2.4500
pocket mouth on a plane normal to x, 4 edge(s) ? 6.0000
depth 2.4500
pocket mouth on a plane normal to x, 4 edge(s) ? position from the y datum

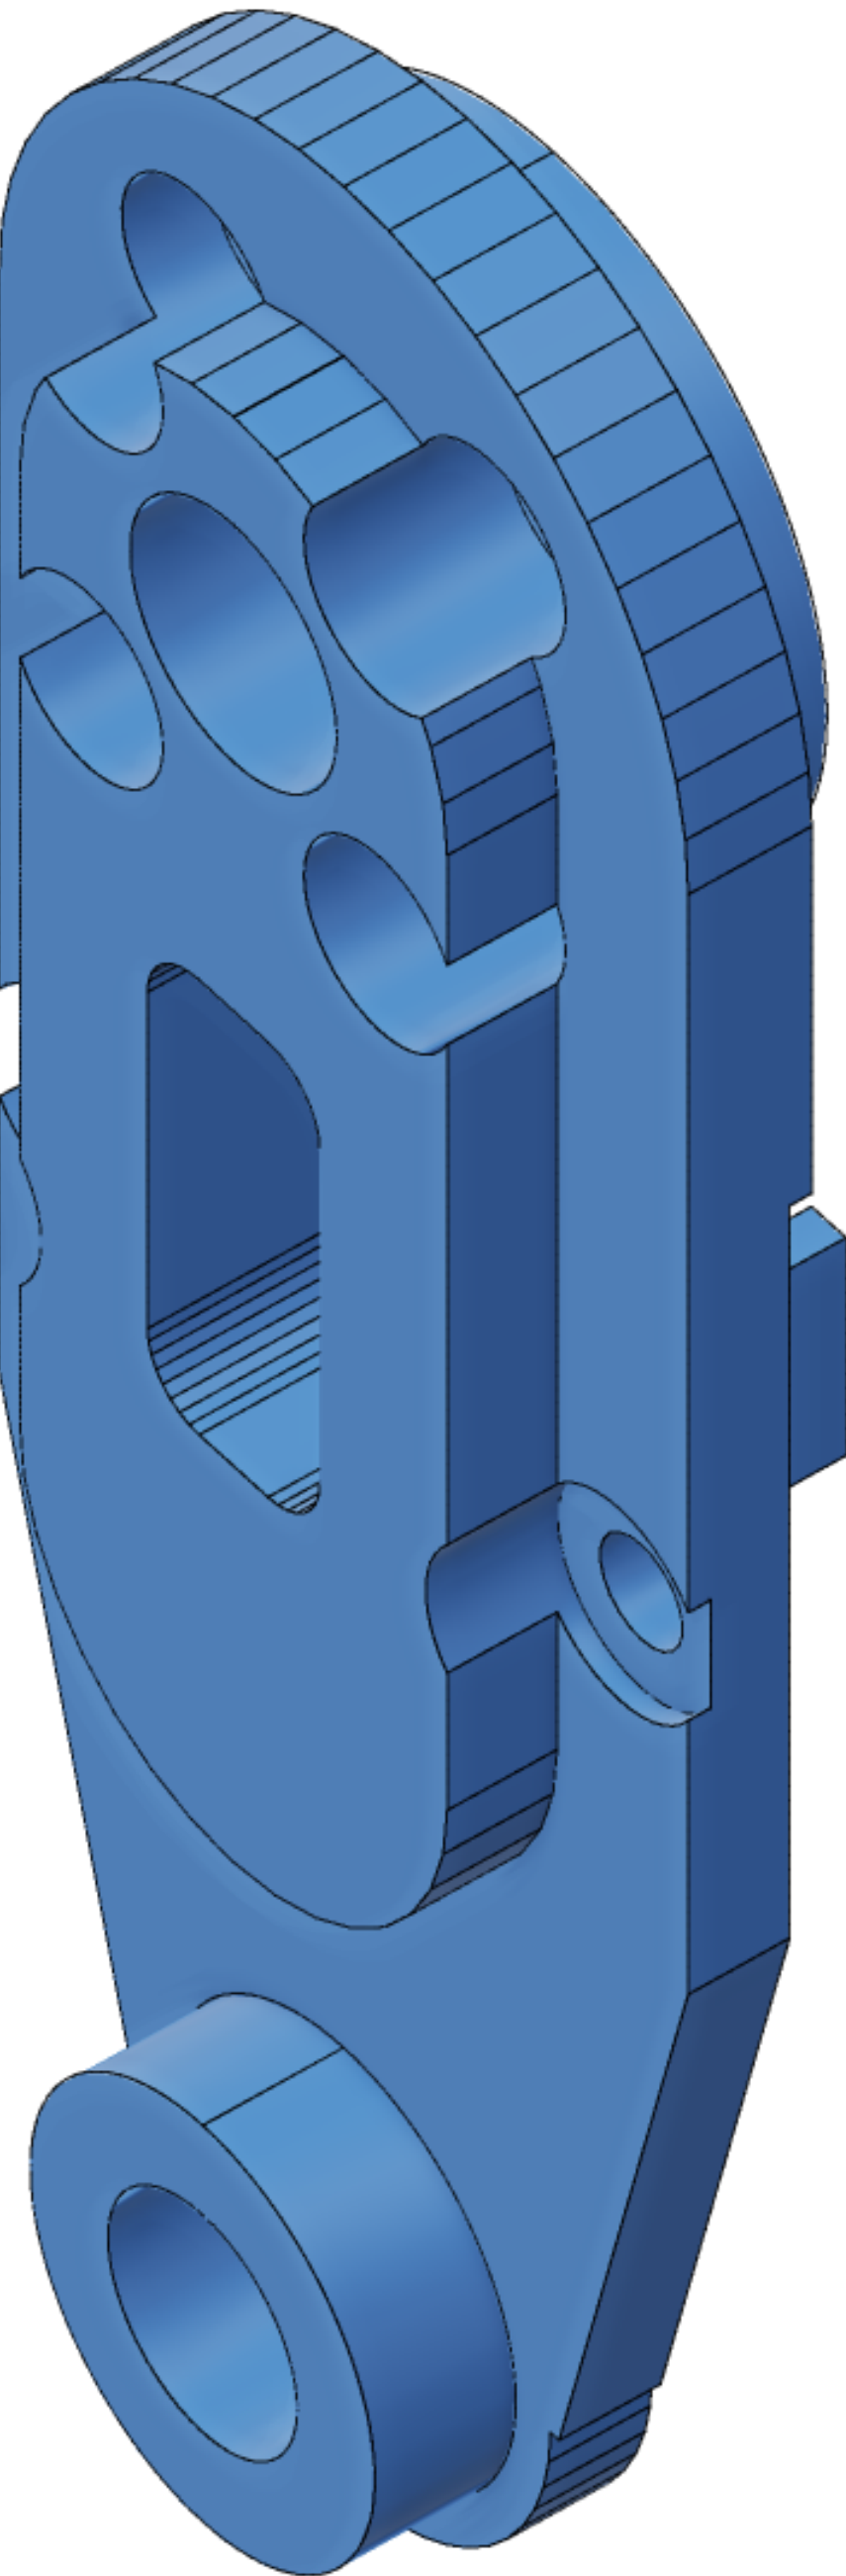


TOP OBLIQUE RENDER

CANNOT DETERMINE ? mate: A4 requires every surface that mates with another part, with the mating part named by its triad ref; the mates live in ce-assemblies//joints.json and are not read here SETTLED BY: reading this part's joints out of the assemblies that use it and matching each mate to a face

PRINT / DFM
ORIENTATION: upright, Z-up (8 x 20 x 58 mm)
THINNEST WALL, WHOLE SOLID (RAY MINIMUM): 0.0200 mm ? a distance through material, NOT a printable wall where it falls on an edge, a fillet run-out or a chamfer tip.
Printability is judged on the next line.
PRINTABLE MINIMUM WALL: 1.0000 mm (smallest median wall over a 3.1340 mm neighbourhood,
cecad.inspect.printable.wall_detail) against a 0.0000 mm floor (2 perimeters @ 0.4 mm nozzle): VERDICT PASS

MEASURED FEATURES ? mm
pocket mouth on a plane normal to x, 4 edge(s) ? position from the z datum 32.4730
pocket mouth on a plane normal to x, 36 edge(s) ? width 5.0000
pocket mouth on a plane normal to x, 36 edge(s) ? length 11.5000
pocket mouth on a plane normal to x, 36 edge(s) ? depth 5.3000
pocket mouth on a plane normal to x, 36 edge(s) ? position from the y datum 10.0000
pocket mouth on a plane normal to x, 36 edge(s) ? position from the z datum 32.9730
pocket mouth on a plane normal to x, 4 edge(s) ? width 1.0000
pocket mouth on a plane normal to x, 4 edge(s) ? length 5.5000
pocket mouth on a plane normal to x, 4 edge(s) ? depth 2.4500
pocket mouth on a plane normal to x, 4 edge(s) ? position from the y datum 14.0000
pocket mouth on a plane normal to x, 4 edge(s) ? position from the z datum 32.4730
slot mouth on a plane normal to x, 8 edge(s) ? width 2.4000
slot mouth on a plane normal to x, 8 edge(s) ? length 14.0000
slot mouth on a plane normal to x, 8 edge(s) ? depth 2.4500
slot mouth on a plane normal to x, 8 edge(s) ? position from the y datum 18.0000
slot mouth on a plane normal to x, 8 edge(s) ? position from the z datum 28.2230

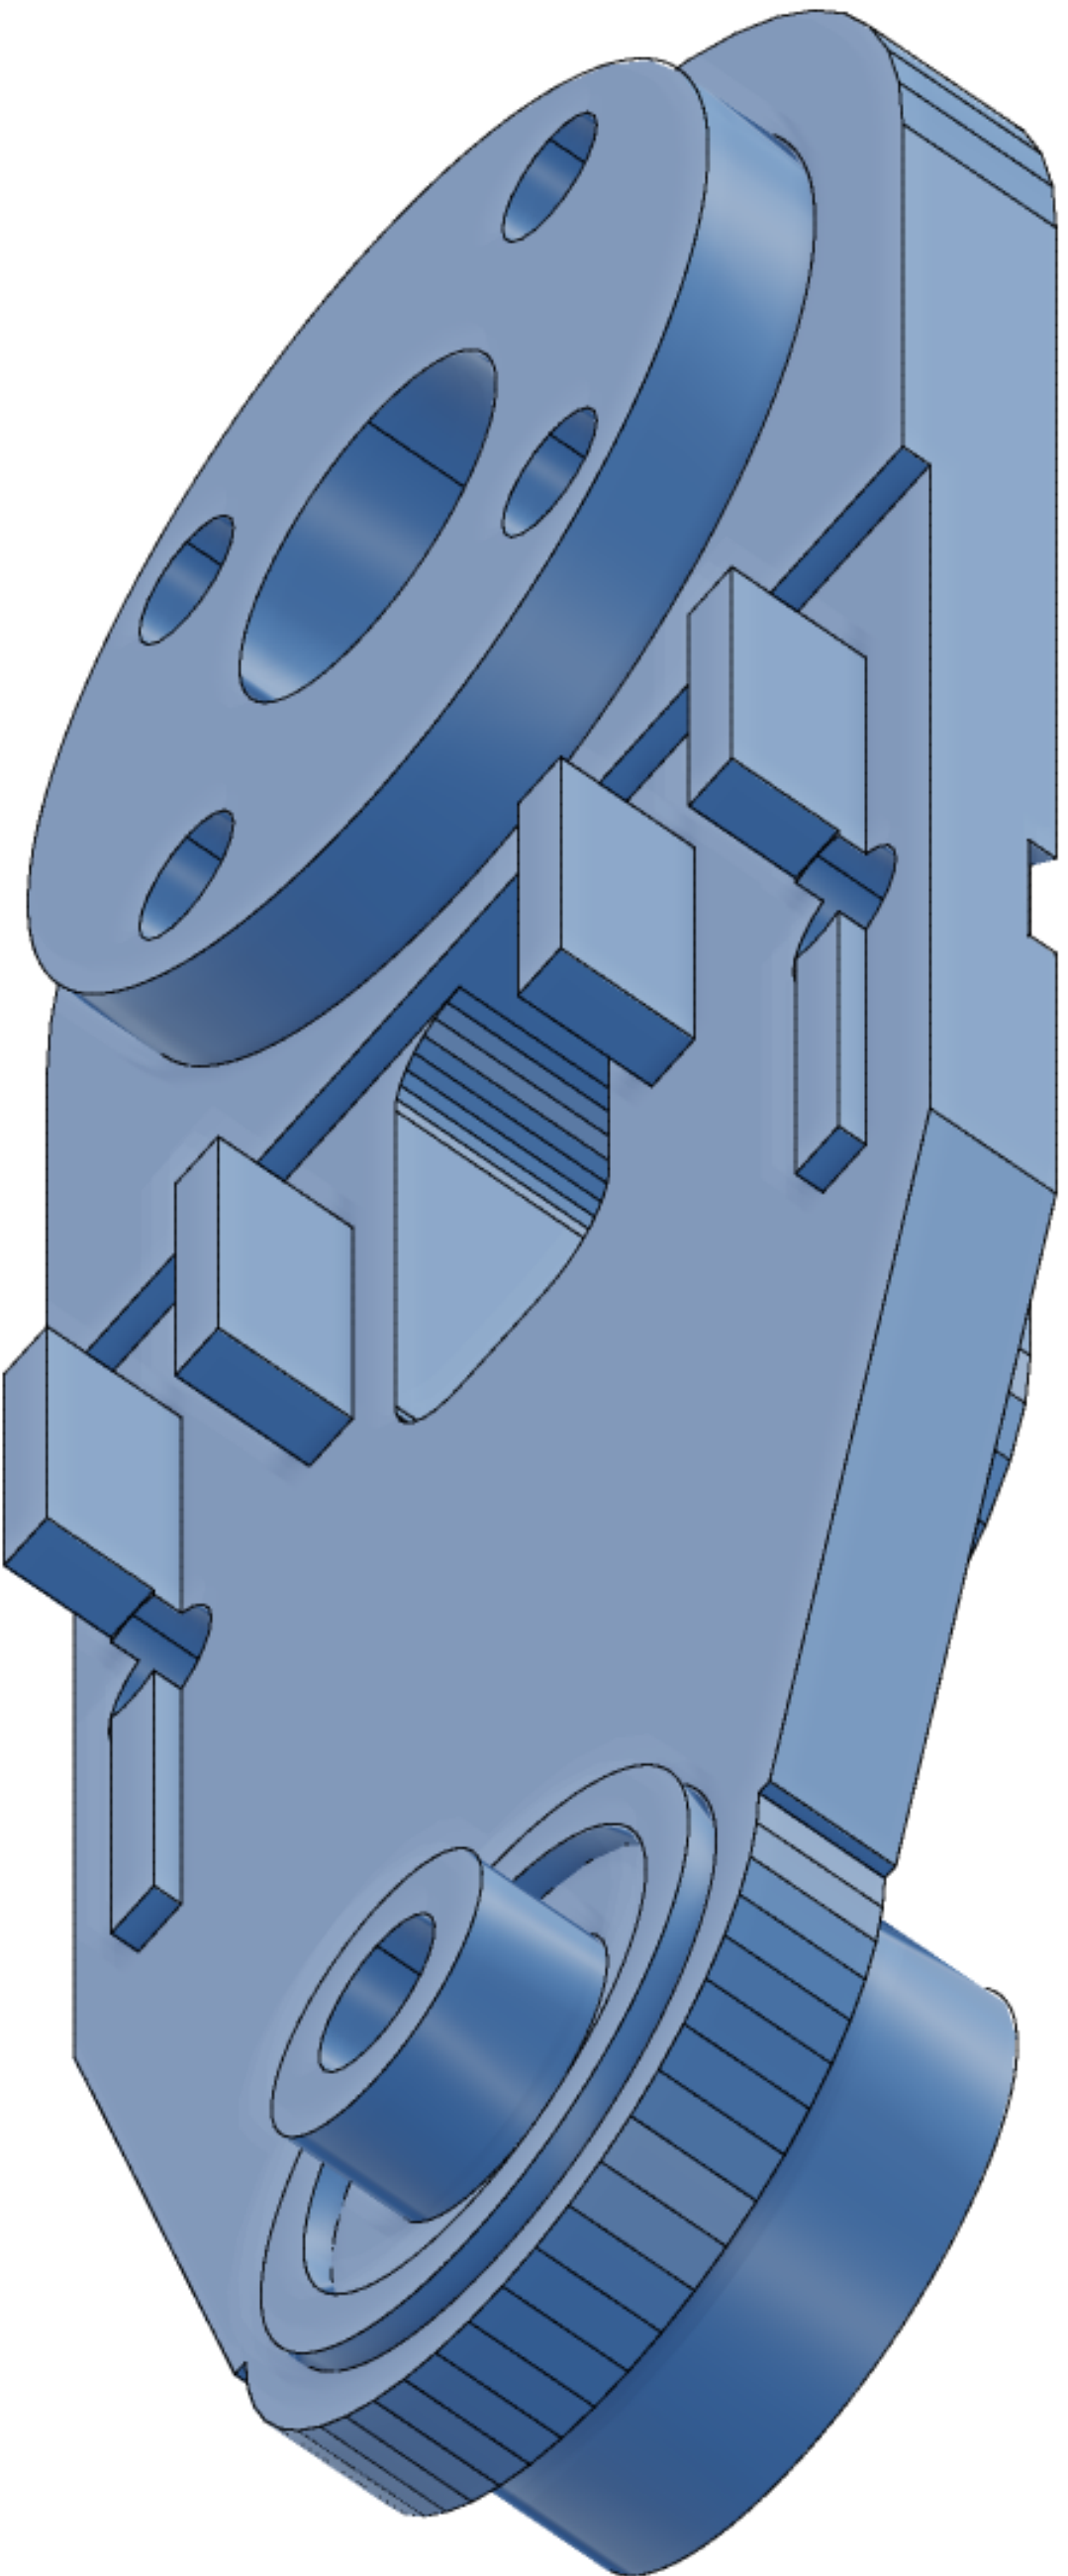

BOTTOM OBLIQUE RENDER

CANNOT DETERMINE ? wall: A4 wants a wall thickness at every distinct station; only the thinnest wall is measurable off the solid without a station list
SETTLED BY: the drawer declaring the section stations it dimensions, or a section per shell region

PRINT / DFM
15 horizontal bore(s) bridge at the crown: ream any bearing or press-fit bore to size
FILAMENT: PLA, ~4 g (modelled), 290 layers @ 0.2 mm