


A


B

C

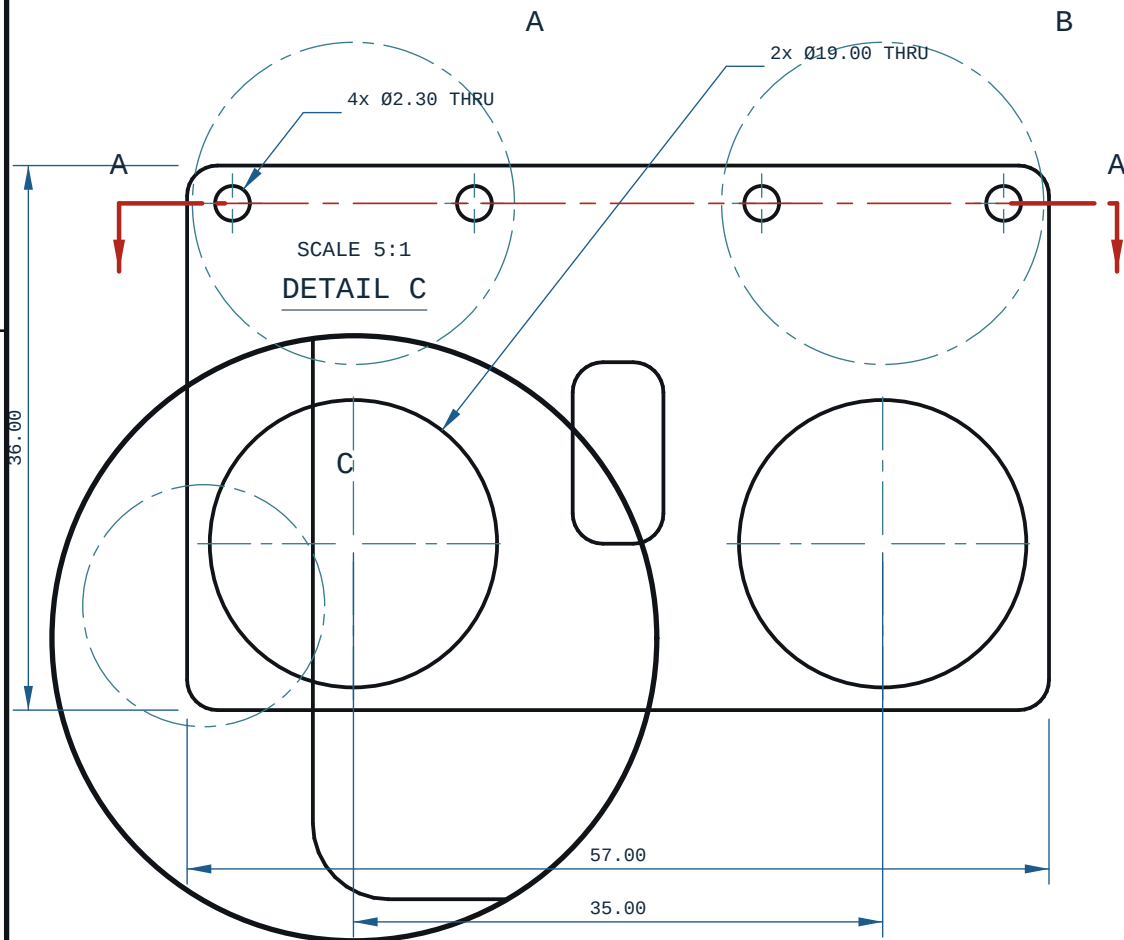

TOP VIEW


X ? Y ?

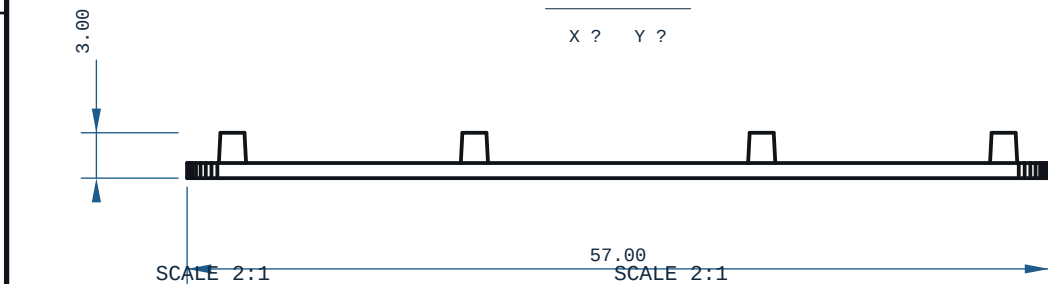

DETAIL A

DETAIL B


X ? Z ?

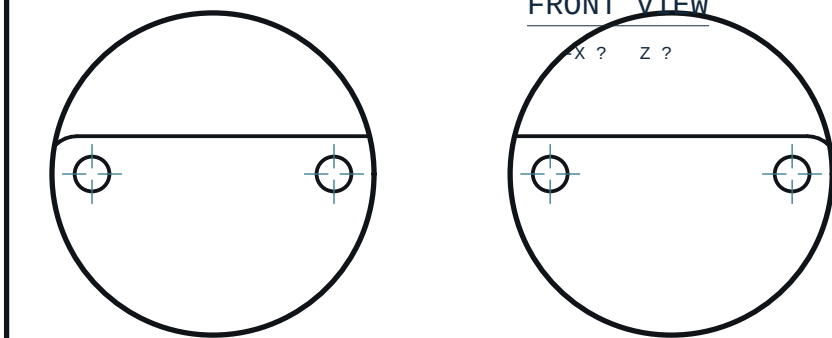


A

B

C

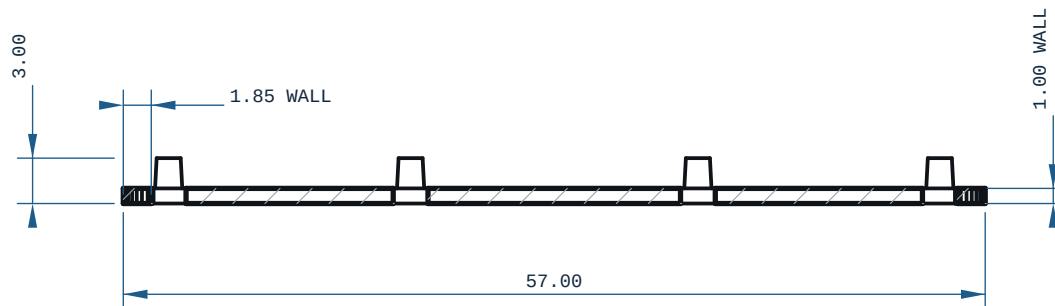

SECTION A-A

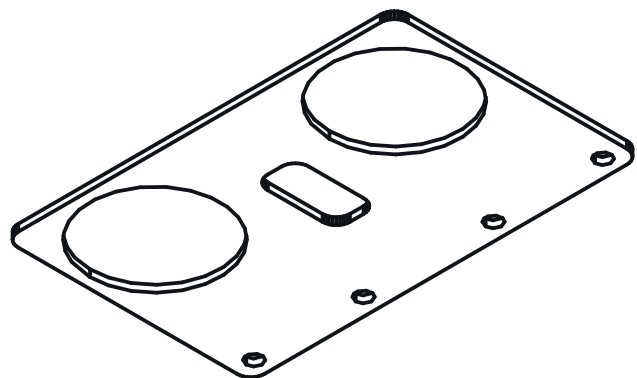

ISOMETRIC VIEW

57.00 x 36.00 x 3.00 mm

HOLE TABLE ? 6 POSITIONS

TAG	SIZE	X	Y	C'BORE
A1	Ø2.30 THRU	-25.50	20.50	-
A2	Ø2.30 THRU	-9.50	20.50	-
A3	Ø2.30 THRU	9.50	20.50	-
A4	Ø2.30 THRU	25.50	20.50	-
A5	Ø19.00 THRU	-17.50	-2.00	-
A6	Ø19.00 THRU	17.50	-2.00	-

every row measured off the solid; positions are model coordinates, mm. C'BORE side is the face it opens on.

NOTES

- ALL DIMENSIONS IN mm AND DEGREES. EVERY DIMENSION AND EVERY HOLE CALLOUT WAS MEASURED OFF THE SOLID.
- PROCESS: FDM.
- THINNEST WALL, WHOLE SOLID: 1.0000 mm, AT X=-27.402 Y=-6.099 Z=16.500 ? MEASURED OVER THE WHOLE SOLID BY RAY+EXACT AT 1.409 mm SAMPLE SPACING (A FEATURE NARROWER THAN THAT CAN BE MISSED). A RAY MINIMUM AT AN EDGE, A FILLET RUN-OUT OR A CHAMFER TIP IS A REAL DISTANCE THROUGH MATERIAL AND IS NOT A PRINTABLE WALL.
- GENERAL TOLERANCE ± 0.20 mm (FDM 3D PRINTING) UNLESS OTHERWISE STATED, DERIVED FROM THE DECLARED PROCESS.
- SECTION A-A AT Y=20.50: THINNEST MATERIAL IN THIS PLANE ONLY 1.00 mm, AT X=-28.02, Z=17.00 ? A SCAN OF ONE CUT, NOT THE PART MINIMUM.

PRINT / DFM

- ORIENTATION: laid flat (57 x 36 x 3 mm)
- THINNEST WALL: 1.00 mm (floor 0.80 mm = 2 perimeters @ 0.4 mm nozzle)
- FILAMENT: PLA, ~2 g (modelled), 15 layers @ 0.2 mm

MICRODUCK-TRUNK-BASE



REV

A

MATERIAL		PROCESS	SCALE
PLA		FDM	2:1
CATEGORY	GENERAL TOL	FINISH	SHEET
plate	SEE NOTES	AS PRINTED	A3 1/1
VOLUME (MEASURED)		MASS (ASSUMES PLA)	UNITS
1.41 cm3		1.8 g	mm / deg
SIZE (BBOX, MEASURED)		DRAWN	PROJECTION
57.00 x 36.00 x 3.00		ce-cad 2026-09-02	THIRD ANGLE
SOURCE (DESIGN FILE)			
X			