

ISOMETRIC VIEW

7.95 x 20.00 x 58.00 mm



REFERENCE RENDER (ISO2) ? rendered off this solid,
900 x 680 px

HOLE TABLE ? 8 POSITIONS

TAG	SIZE	Y	Z	C'BORE
A1	Ø2.20 THRU	26.24	40.02	Ø4.40x4.49 +X
A2	Ø2.20 THRU	17.76	40.02	Ø4.40x4.49 +X
A3	Ø6.00 THRU	22.00	35.78	-
A4	Ø2.20 THRU	26.24	31.53	Ø4.40x4.49 +X
A5	Ø2.20 THRU	17.76	31.53	Ø4.40x4.49 +X
A6	Ø2.40 THRU	30.00	16.28	Ø4.84x3.00 +X
A7	Ø2.40 THRU	14.00	16.28	Ø4.84x3.00 +X
A8	Ø2.70 THRU	22.00	-6.22	Ø5.50x3.49 -X


every row measured off the solid; positions are model
coordinates, mm. C'BORE side is the face it opens on.

NOTES

- ALL DIMENSIONS IN mm AND DEGREES. EVERY DIMENSION
AND EVERY HOLE CALLOUT WAS MEASURED OFF THE
SOLID.
- PROCESS: FDM.
- THINNEST WALL, WHOLE SOLID: 0.0280 mm, AT
X=35.867 Y=31.977 Z=14.882 ? MEASURED OVER THE
WHOLE SOLID BY RAY+EXACT AT 1.045 mm SAMPLE
SPACING (A FEATURE NARROWER THAN THAT CAN BE
MISSED). A RAY MINIMUM AT AN EDGE, A FILLET
RUN-OUT OR A CHAMFER TIP IS A REAL DISTANCE
THROUGH MATERIAL AND IS NOT A PRINTABLE WALL.
- GENERAL TOLERANCE CANNOT DETERMINE ? SEE PRINT /
DFM NOTES UNLESS STATED.
- SECTION A-A AT Y=26.24: THINNEST MATERIAL IN THIS
PLANE ONLY 1.38 mm, AT X=30.53, Z=41.81 ? A SCAN
OF ONE CUT, NOT THE PART MINIMUM.
- RIGHT VIEW: the suppression probe could not run
(AttributeError: 'list' object has no attribute
'get'), so hidden lines are KEPT.
- FRONT VIEW: the suppression probe could not run
(AttributeError: 'list' object has no attribute
'get'), so hidden lines are KEPT.

PRINT / DFM

- ORIENTATION: upright, Z-up (8 x 20 x 58 mm)
- THINNEST WALL: 0.03 mm (floor 0.80 mm = 2
perimeters @ 0.4 mm nozzle)
- 15 horizontal bore(s) bridge at the crown: ream
any bearing or press-fit bore to size
- FILAMENT: PLA, ~4 g (modelled), 290 layers @ 0.2
mm
- TOLERANCE BASIS (IN-HOUSE): CANNOT DETERMINE.
Every Bambu machine on this farm records
tolerance_mm: null with the cite "no coupon
printed and measured on this machine"
(ce-machines/bambu-lab/capabilities.json, read
ce-machines/bambu-h20/capabilities.json, read
2026-09-02), and Bambu Lab's own H20 Pro
technical specification carries no
dimensional accuracy line at all. Dimensions on
this sheet are MINIMAL AS MODELLED.
- TOLERANCE BASIS (OUTSOURCED): JLC3DP publishes
+/-0.3 mm for FDM (Jlc3dp.com,
ce-machines/farm-jlc3dp/capabilities.json) and
hubs publishes +/-0.2 mm with a +/-0.5 mm floor
(hubs.com/3d-printing/
ce-machines/farm-hubs/capabilities.json) quote
whichever route makes the part; do not apply
both.
- THE +/-0.2 mm in cecad/machining.py
PROCESSES["fdm"].tolerance_mm IS A REPO PLANNING
CONSTANT WITH NO VENDOR CITE and is deliberately

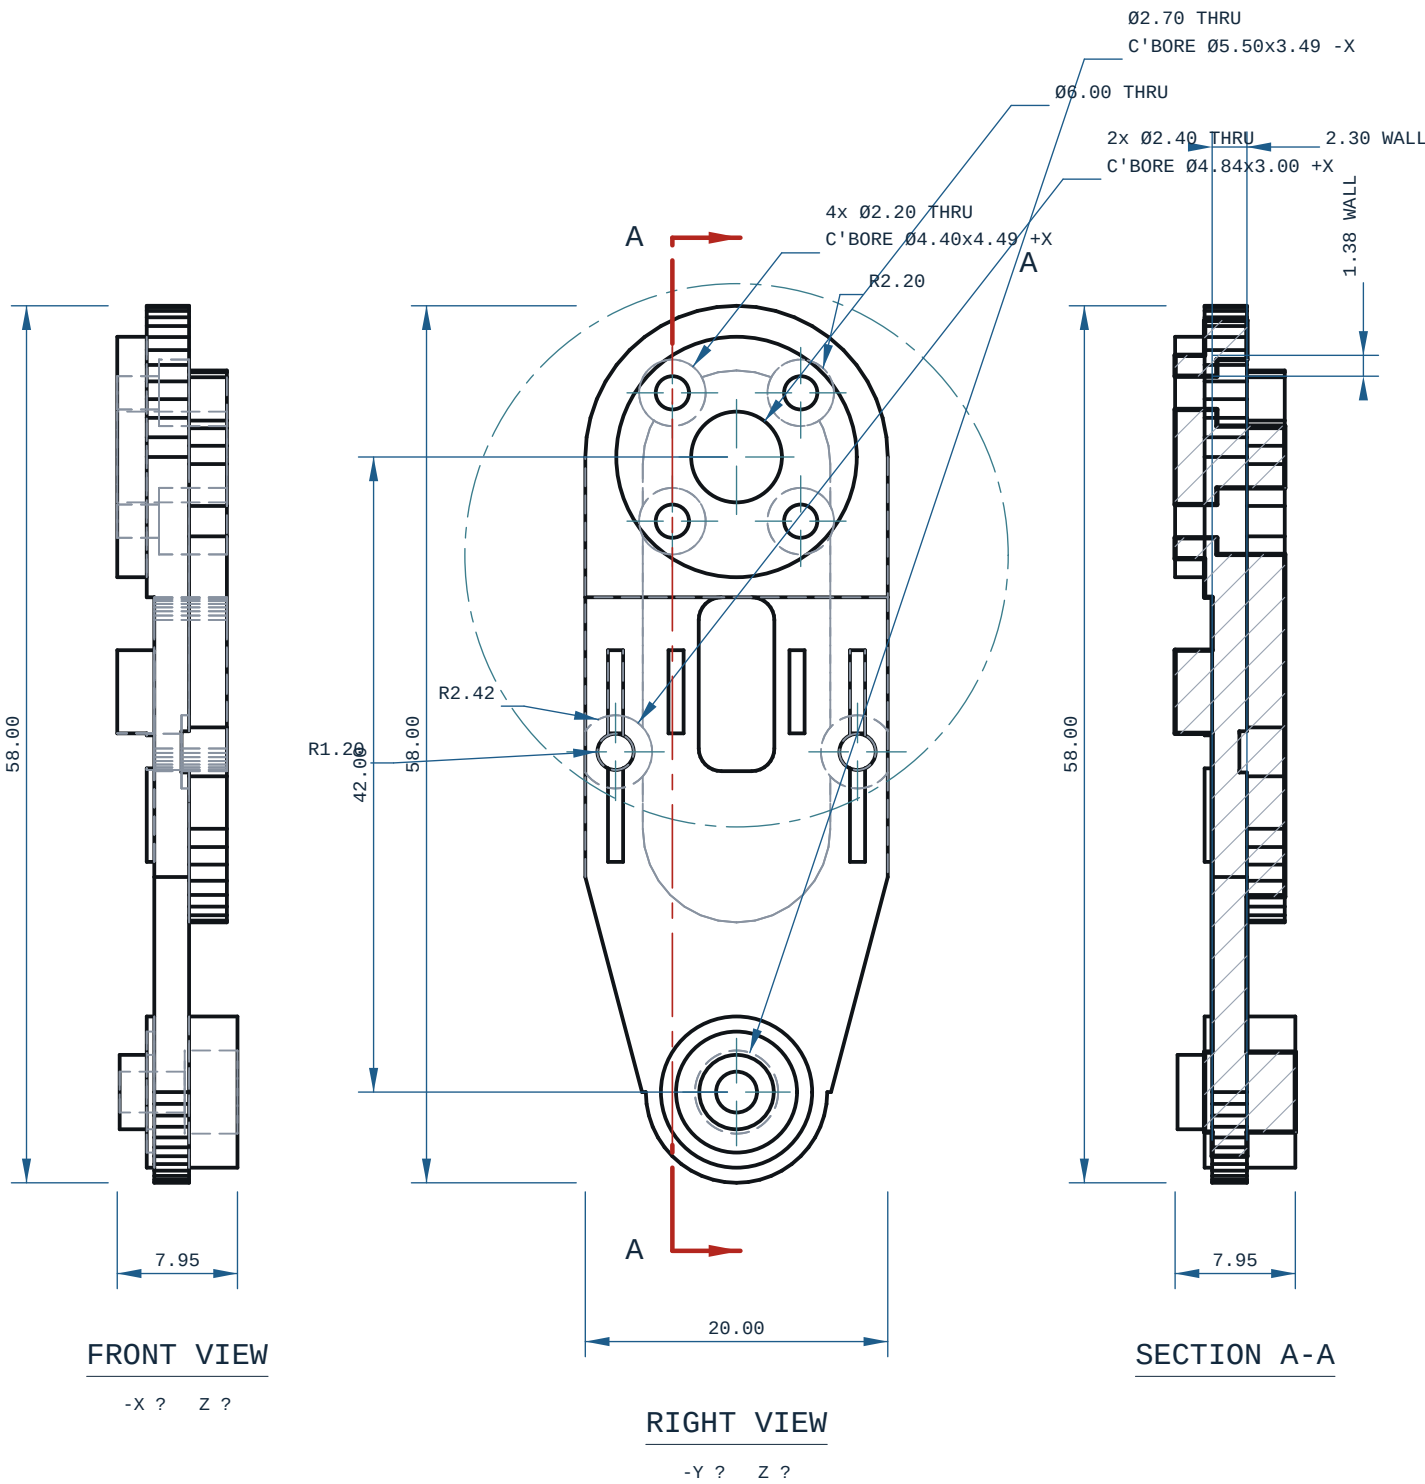

SCALE 2:1
DETAIL A

