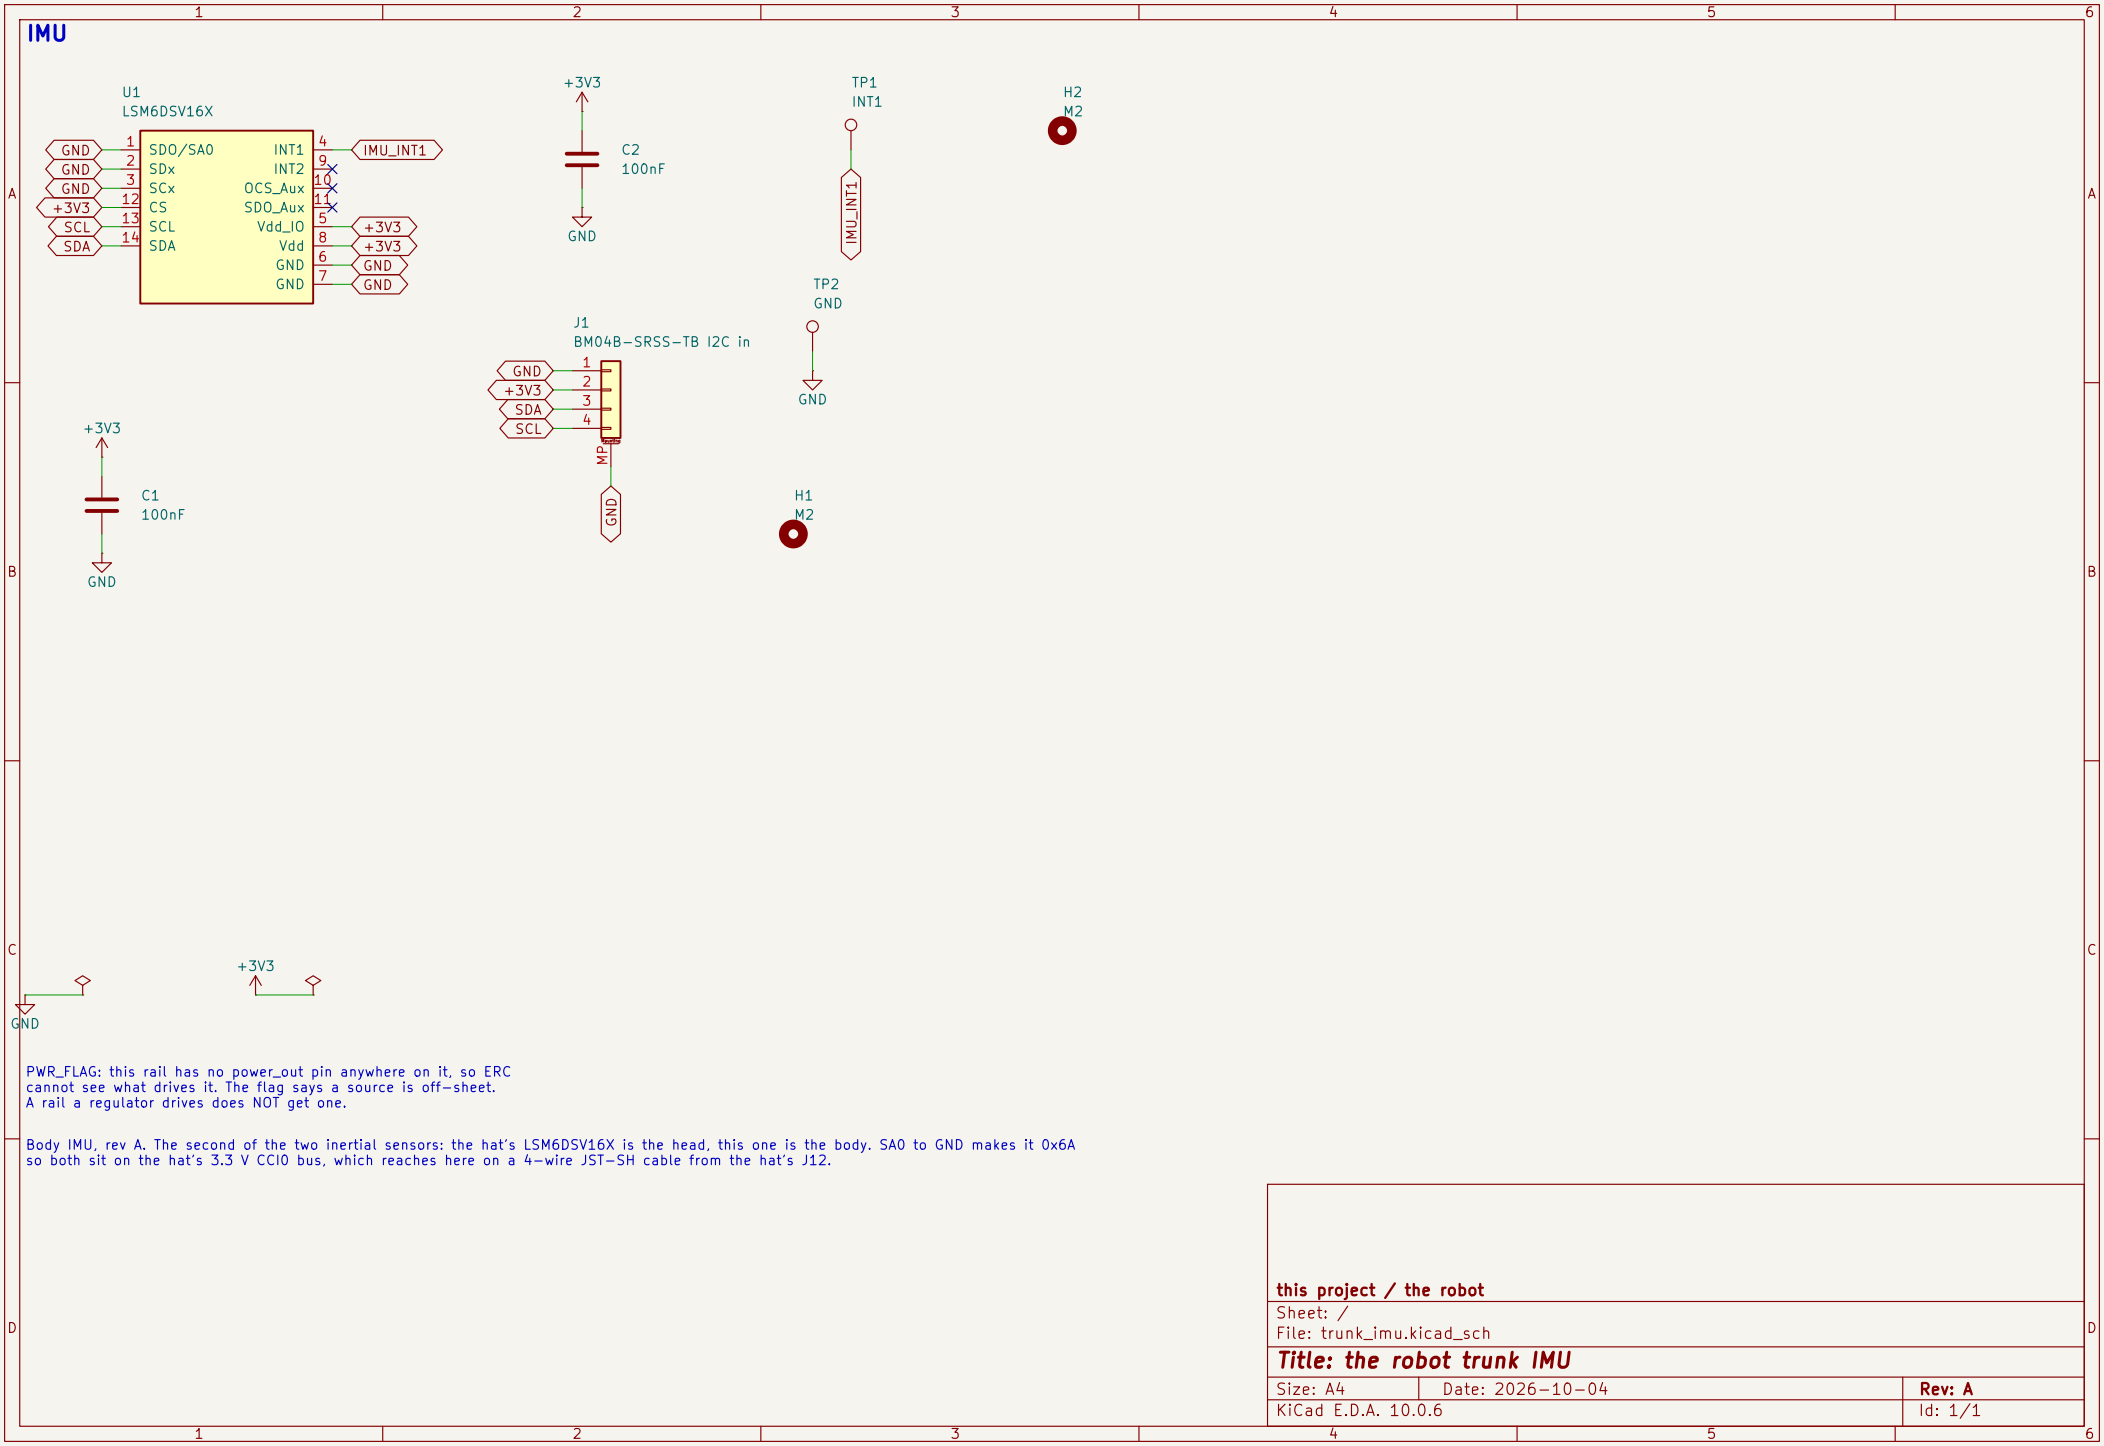

IMU
U1
LSM6DSV16X
GND
GND
GND
+3V3
SCL
SDA
SDO/SA0
SDx
SCx
CS
SCL
SDA
INT1
INT2
OCS_Aux
SDO_Aux
Vdd_IO
Vdd
GND
GND
IMU_INT1
+3V3
+3V3
GND
GND
+3V3
C2
100nF
GND
TP1
INT1
IMU_INT1
H2
M2
TP2
GND
GND
J1
BM04B-SRSS-TB I2C in
GND
+3V3
SDA
SCL
MP
GND
+3V3
C1
100nF
GND
H1
M2
GND
+3V3
PWR_FLAG: this rail has no power_out pin anywhere on it, so ERC
cannot see what drives it. The flag says a source is off-sheet.
A rail a regulator drives does NOT get one.
Body IMU, rev A. The second of the two inertial sensors: the hat's LSM6DSV16X is the head, this one is the body. SA0 to GND makes it 0x6A
so both sit on the hat's 3.3 V CCIO bus, which reaches here on a 4-wire JST-SH cable from the hat's J12.
this project / the robot
Sheet: /
File: trunk_imu.kicad_sch
Title: the robot trunk IMU
Size: A4
Date: 2026-10-04
Rev: A
KiCad E.D.A. 10.0.6
Id: 1/1