


November 2015



MULTILAYER CERAMIC CAPACITORS

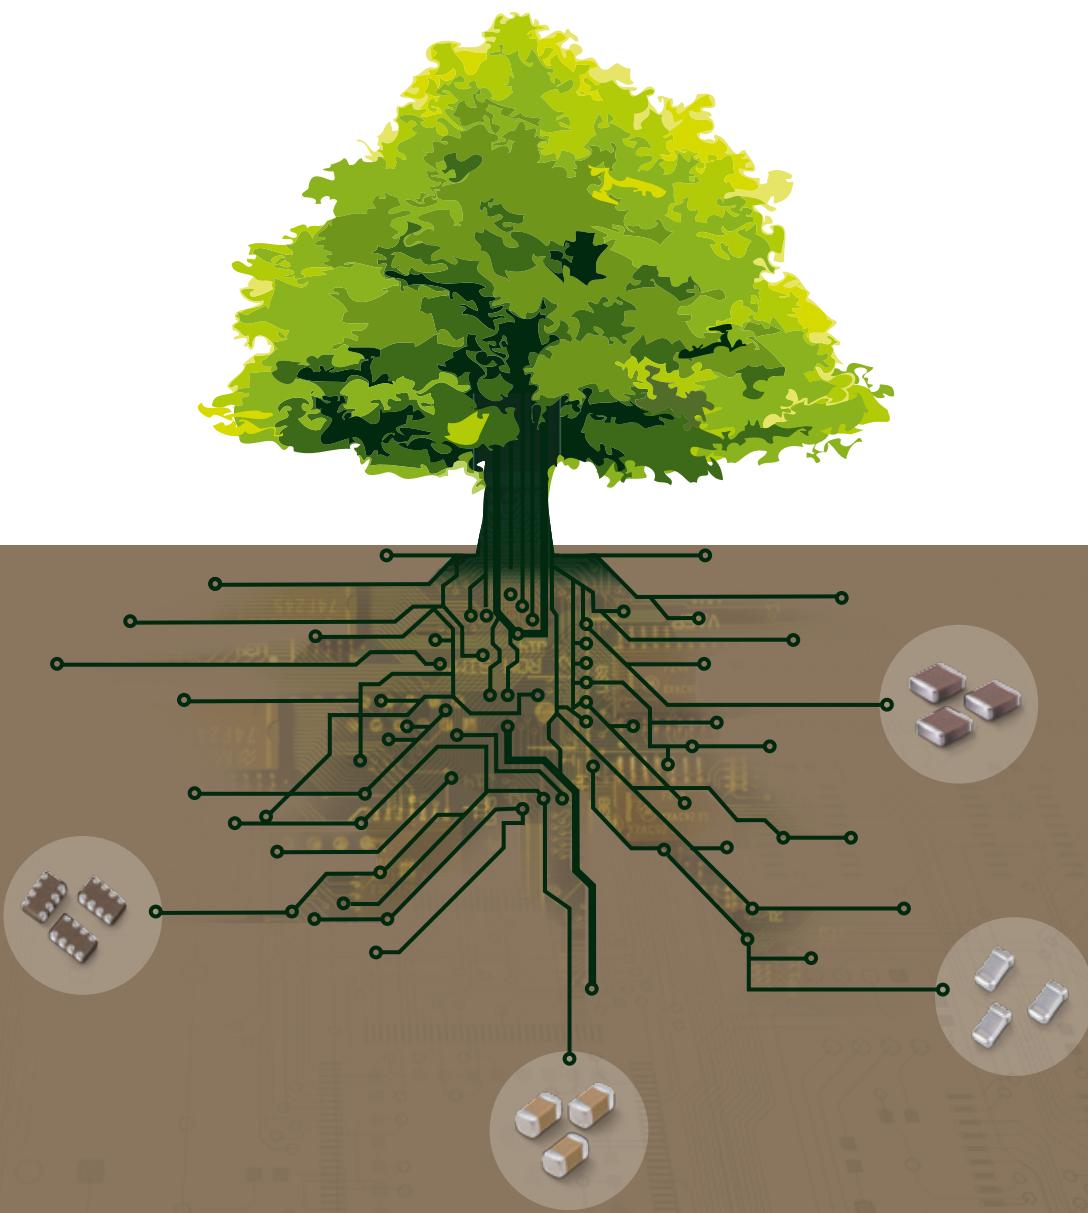

SAMSUNG
ELECTRO-MECHANICS

SAMSUNG



We declare that all our MLCCs are produced in accordance with EU ROHS and REACH Directive.

1. RoHS Compliance and restriction of Br

The following restricted materials are not used in packaging materials as well as products in compliance with the law and restriction.
- Cd, Pb, Hg, Cr6+, As, Br and the compounds, PCB, asbestos

2. No use of materials breaking Ozone layer

The following ODS materials are not used in our fabrication process.
- ODS material : Freon, Haron, 1-1-1 TCE, CCl₄, HCFC

If you want more detailed Information, Please Visit Samsung Electro-mechanics Website
[<http://www.semocr.com>]

Please, see the last page of this catalog for our environmental certification list.

CONTENTS

Part Numbering System	4	Part Numbering System
Standard & High Capacitors	6	Standard & High Capacitors
Super Small Size Capacitors	30	Super Small Size Capacitors
High-Q Capacitors	35	High-Q Capacitors
Medium-High Voltage Capacitors	36	Medium-High Voltage Capacitors
Array Type Capacitors	47	Array Type Capacitors
Low ESL Capacitors	50	Low ESL Capacitors
Reliability Test Condition	53	Reliability Test Condition
Premium Capacitors for Automotive Applications	60	Premium Capacitors for Automotive Applications
Packaging Specification	72	Packaging Specification
Application Manual for Surface Mounting	76	Application Manual for Surface Mounting

Part Numbering System

CL	10	A	106	M	P	8	N	N	N	C
1	2	3	4	5	6	7	8	9	10	11

1. SERIES CODE

CL = Multi layer Ceramic Capacitors

2. SIZE CODE — inch(mm)

02 = 01005(0402)	21 = 0805(2012)	43 = 1812(4532)
03 = 0201(0603)	31 = 1206(3216)	55 = 2220(5750)
05 = 0402(1005)	32 = 1210(3225)	
10 = 0603(1608)	42 = 1808(4520)	

3. DIELECTRIC CODE

Class I	Class II
C = COG	A = X5R F = Y5V
	B = X7R X = X6S
	Y = X7S Z = X7T

4. CAPACITANCE CODE

Capacitance expressed in pF. 2 significant digits plus number of zeros.
example) 106 = $10 \times 10^6 = 10000000$ pF

For Values < 10pF, Letter R denotes decimal point
example) 1R5 = 1.5pF

5. TOLERANCE CODE

B = $\pm 0.1\text{pF}$	F = $\pm 1\text{pF}, \pm 1\%$ *	K = $\pm 10\%$
C = $\pm 0.25\text{pF}$	G = $\pm 2\%$	M = $\pm 20\%$
D = $\pm 0.5\text{pF}$	J = $\pm 5\%$	Z = $+80/-20\%$

*For Values $\leq 10\text{pF}$, F = $\pm 1\text{pF}$

Values $> 10\text{pF}$, F = $\pm 1\%$

6. RATED VOLTAGE CODE

R = 4V	O = 16V	B = 50V	E = 250V	H = 630V	K = 3000V
Q = 6.3V	A = 25V	C = 100V	F = 350V	I = 1000V	
P = 10V	L = 35V	D = 200V	G = 500V	J = 2000V	

7. THICKNESS CODE

2 = 0.20mm	A = 0.65mm	F = 1.25mm	L = 3.20mm	S = 1.35mm
3 = 0.30mm	C = 0.85mm	H = 1.60mm	M = 1.15mm	U = 1.80mm
5 = 0.50mm	D = 1.00mm	I = 2.00mm	P = 1.15mm	V = 2.50mm
8 = 0.80mm	E = 1.10mm	J = 2.50mm	Q = 1.25mm	Y = 1.25mm
9 = 0.90mm				

8. INNER ELECTRODE / TERMINATION / PLATING CODE

A = Normal Product Pd / Ag / Ni barrier / Sn 100%
 N = Normal Product Ni / Cu / Ni barrier / Sn 100%
 G = Normal Product Cu / Cu / Ni barrier / Sn 100%
 L = Low profile Ni / Cu / Ni barrier / Sn 100%
 S = Nomal Product Ni / Cu / Soft termination / Ni barrier / Sn100%

9. PRODUCT CODE

N = Normal
 A = Array(4-element)
 B = Array(4-element)
 L = LICC
 J = SLIC

Size Code	*Size tolerance					
	01005(0402)	0201(0603)	0402(1005)	0603(1608)	0805(2012)	1206(3216)
S	± 0.03	± 0.05	± 0.07	± 0.07		± 0.30
Q	± 0.05	± 0.07	± 0.10	± 0.15	± 0.15	
R	± 0.07	± 0.09	± 0.15	± 0.20	± 0.20	
U	± 0.09		± 0.20	± 0.25	± 0.30	
Z			± 0.40	± 0.30		
9			± 0.30			

10. CONTROL CODE

N = Reserved for future use

11. PACKAGING CODE

B = Bulk
 P = Bulk Case
 C = Cardboard Tape, 7"Reel
 H = Cardboard Tape, 7"Reel(15,000ea)
 8= Cardboard Tape, 7"Reel

O = Cardboard Tape, 10"Reel	E = Embossed Type, 7"Reel
D = Cardboard Tape, 13"Reel(10,000ea)	G = Embossed Type, 7" Reel(3,000ea)
L = Cardboard Tape, 13"Reel(15,000ea)	F = Embossed Type, 13"Reel
	S = Embossed Type, 10"Reel
Z = Cardboard Type, 7"Reel(Chip aligned for horizontal SMT)	
Y = Cardboard Type, 7"Reel(Chip aligned for vertical SMT)	

Class I (Temperature Compensation)

Symbol	EIA Code	Operation Temperature Range(°C)	Temperature Coefficient Range(ppm/°C)
C	COG	-55 ~ +125	0±30

Class II (High Dielectric Constant)

Symbol	EIA Code	Operation Temperature Range(°C)	Capacitance Change(△°C %)
A	X5R	-55 ~ +85	±15
B	X7R	-55 ~ +125	±15
X	X6S	-55 ~ +105	±22
F	Y5V	-30 ~ +85	-82 ~ +22
Y	X7S	-55 ~ +125	±22
Z	X7T	-55 ~ +125	-33 ~ +22

Part Numbering System

Standard & High Capacitors

Super Small Size Capacitors

High-Q Capacitors

Medium-High Voltage Capacitors

Array Type Capacitors

Low ESL Capacitors

Reliability Test Condition

Premium Capacitors for Automotive Applications

Packaging Specification

Application Manual for Surface Mounting


Series	TC	Capacitance Step									
		1.0		2.2		4.7		6.8			
E-3	Y5V										
	X5R										
	X7R										
	X6S	1.0	1.5	2.2	3.3	4.7	6.8				
	X7S										
	X7T										
E-12	COG	1.0	1.2	1.5	1.8	2.2	2.7	3.3	3.9	4.7	5.6

Size	Code	Thickness(mm)	Spec(mm)	Size	Code	Thickness(mm)	Spec(mm)
01005(0402)	2	0.20	±0.02	1210(3225)	C	0.85	±0.10*
0201(0603)	3	0.30	±0.03		9	0.90	±0.10*
0402(1005)	3	0.30	±0.03*		F	1.25	±0.20
	5	0.50	±0.05		S	1.35	±0.15
0603(1608)	5	0.50	+0.0/-0.1*		H	1.60	±0.20
	8	0.80	±0.10		U	1.80	±0.20*
0805(2012)	A	0.65	±0.10		I	2.00	±0.20
	C	0.85	±0.10		J	2.50	±0.20
	C	0.85	±0.10*		V	2.50	±0.30
	M	1.15	±0.10		F	1.25	±0.20
	F	1.25	±0.10		H	1.60	±0.20
	Q	1.25	±0.15		I	2.00	±0.20
1206(3216)	Y	1.25	±0.20		F	1.25	±0.20
	C	0.85	±0.15		H	1.60	±0.20
	C	0.85	±0.10*		I	2.00	±0.20
	E	1.10	±0.15		J	2.50	±0.20
	E	1.10	±0.10*		L	3.20	±0.30
	P	1.15	±0.10*		H	1.60	±0.20
	M	1.15	±0.15		I	2.00	±0.20
	F	1.25	±0.15		J	2.50	±0.20
	H	1.60	±0.20		L	3.00	±0.30

■ * Mark is only applicable to "L" code, 12th code in part number.

■ Please discuss with sales person with regard to Pd products.

Standard & High Capacitors

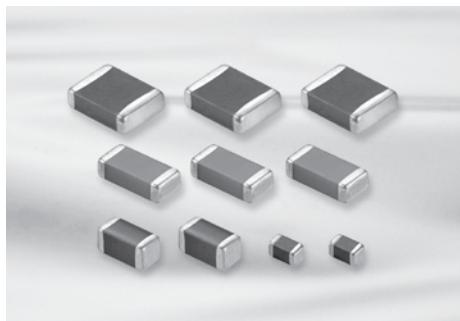


Feature

- Wide selection of size : from 0402 to 2220
- Highly reliable tolerance and high speed automatic chip placement on PCBs
- Wide capacitance range
- Wide temperature compensation and voltage range : from C0G to Y5V and from 6.3V to 50V
- Highly reliable performance
- Highly resistant termination metal
- Tape & reel for surface mount assembly

Application

- HHP, DSC, DVC, LCD, TV, Memory Module, PDA, Game Machine
- Tuner (Product code C is suitable.)
- Desktop PC, Note PC, HHP, DC-DC Converter, DSC

Structure and Dimensions

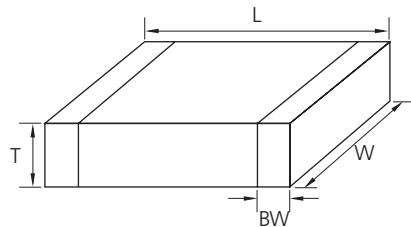

Size Code	EIA Code	Dimension(mm)				
		L	W	T	Thickness Code	BW
05	0402	1.00±0.05	0.50±0.05	0.50±0.05	5	0.25±0.10
10	0603	1.60±0.10	0.80±0.10	0.50+0.0/-0.1(*)	5	0.30±0.20
		1.60±0.10	0.80±0.10	0.80±0.10	8	
21	0805	2.00±0.10	1.25±0.10	0.85±0.10	C	0.5+0.2/-0.3
		2.00±0.10	1.25±0.10	1.15±0.10	M	
		2.00±0.10	1.25±0.10	1.25±0.10	F	
		2.00±0.15	1.25±0.15	1.25±0.15	Q	
		2.00±0.20	1.25±0.20	1.25±0.20	Y	
		3.20±0.20	1.60±0.20	0.60±0.10(*)	6	
		3.20±0.15	1.60±0.15	0.85±0.15	C	
31	1206	3.20±0.20	1.60±0.20	0.85±0.10(*)	C	0.50±0.30
		3.20±0.20	1.60±0.20	1.15±0.10(*)	P	
		3.20±0.15	1.60±0.15	1.25±0.15	F	
		3.20±0.20	1.60±0.20	1.60±0.20	H	
		3.20±0.30	2.50±0.20	0.85±0.10(*)	C	
		3.20±0.30	2.50±0.20	0.90±0.10(*)	9	
32	1210	3.20±0.30	2.50±0.20	1.60±0.20	H	0.60±0.30
		3.20±0.30	2.50±0.20	1.80±0.20(*)	U	
		3.20±0.30	2.50±0.20	2.00±0.20	I	
		3.20±0.30	2.50±0.20	2.50±0.20	J	
		3.20±0.40	2.50±0.30	2.50±0.30	V	
		4.50±0.40	2.00±0.20	1.25±0.20	F	
		4.50±0.40	2.00±0.20	1.40±0.20	G	
43	1812	4.50±0.40	2.00±0.20	2.00±0.20	I	0.80±0.30
		4.50±0.40	3.20±0.30	1.25±0.20	F	
		4.50±0.40	3.20±0.30	2.50±0.20	J	
		4.50±0.40	3.20±0.30	3.20±0.30	L	
		5.70±0.40	5.00±0.40	2.50±0.20	J	
55	2220	5.70±0.40	5.00±0.40	3.20±0.30	L	1.00±0.30

■ * Mark is only applicable to "L" code, 12th code in part number.

Standard & High Capacitance (C0G)

Size(mm)	Vr(V)	Capacitance																					
		pF										nF											
		0.5	1	10	22	47	100	220	330	470	560	1	2.2	3.3	4.7	6.8	10	22	27	33	47	68	100
0402(1005)	25																						
	50																						
0603(1608)	25																						
	50																						
0805(2012)	25																						
	50																						
1206(3216)	16																						
	25																						
	50																						
1210(3225)	50																						
1812(4532)	25																						
	50																						
2220(5750)	50																	43nF			130nF		

Part Numbering System

Standard & High Capacitors

Super Small Size Capacitors

High-Q Capacitors

Medium-High Voltage Capacitors

Array Type Capacitors

Low ESL Capacitors

Reliability Test Condition

Premium Capacitors for Automotive Applications

Packaging Specification

Application Manual for Surface Mounting



**SAMSUNG
ELECTRO-MECHANICS**

Standard & High Capacitance (X5R)

Standard & High Capacitance-Low Profile (X5R)

Size(mm)	Tmax (mm)	Vr(V)	Capacitance (μF)					
			1	2.2	4.7	10	22	47
0402(1005)	0.33	6.3	X6S		(Tmax=0.35)			
		10						
		16						
0603(1608)	0.5	6.3						
		10						
		16						
		25						
0805(2012)	0.7	10						
		16						
		25						
	0.85	25						
	0.95	4						(Tmax=1.0)
		6.3						(Tmax=1.0)
		10						
		16						
		25				X6S		
1206(3216)	0.7	10						
	0.95	6.3						
		10						
		16						
		25						
		50		(Tmax=1.0)	(Tmax=1.0)			
		100		(Tmax=1.0)				
1210(3225)	0.95	16						
	2.0	25						
		35						
		50						

Part Numbering System

Standard & High Capacitors

Super Small Size Capacitors

High-Q Capacitors

Medium-High Voltage Capacitors

Array Type Capacitors

Low ESL Capacitors

Reliability Test Condition

Premium Capacitors for Automotive Applications

Packaging Specification

Application Manual for Surface Mounting



SAMSUNG
ELECTRO-MECHANICS

Standard & High Capacitance (X6S)

Standard & High Capacitance (X7R)

Size(mm)	Vr(V)	Capacitance (μF)									
		0.1	0.22	0.47	1	2.2	4.7	10	22	47	100
0402(1005)	6.3				1						
	10			X7S							
	16										
0603(1608)	6.3										
	10										
	16										
	25										
	50										
0805(2012)	6.3										
	10										
	16										
	25					X7S					
	35										
	50										
1206(3216)	6.3										
	10										
	16										
	25										
	35										
	50										
1210(3225)	6.3									X7T	
	10										
	16										
	25										
	50										

Part Numbering System

Standard & High Capacitors

Super Small Size Capacitors

High-Q Capacitors

Medium-High Voltage Capacitors

Array Type Capacitors

Low ESL Capacitors

Reliability Test Condition

Premium Capacitors for Automotive Applications

Packaging Specification

Application Manual for Surface Mounting



Standard & High capacitance (Y5V)

Size(mm)	Vr(V)	Capacitance (μF)								
		0.1	0.22	0.47	1	2.2	4.7	10	22	47
0402(1005)	6.3									
	10									
	16									
	25									
0603(1608)	6.3									
	10									
	16									
	25									
	50									
0805(2012)	6.3									
	10									
	16									
	25									
	50									
1206(3216)	10									
	16									
	25									
	50				(Tmax=1.35)					
1210(3225)	6.3									
	10									
	16									
	25									
	35									
	50				(Tmax=1.45)					

Standard & High capacitance - Low Profile (Y5V)

Size(mm)	Vr(V)	Capacitance (μF)					
		1	2.2	4.7	10	22	47
0805(2012)	6.3						
	10						

Product Lineup (Standard & High Capacitors-C0G)

	Part Number	Size L x W (mm)	Capacitance	Rated Voltage (Vdc)	Capacitance Tolerance	Thickness Max.(mm)
1	CL05C0R5CB5NNN □	1.00×0.50	0.5pF	50	±0.25pF	0.55
2	CL05CR75CB5NNN □		0.75pF	50	±0.25pF	0.55
3	CL05C010CB5NNN □		1.0pF	50	±0.25pF	0.55
4	CL05C1R2CB5NNN □		1.2pF	50	±0.25pF	0.55
5	CL05C1R5CB5NNN □		1.5pF	50	±0.25pF	0.55
6	CL05C1R8CB5NNN □		1.8pF	50	±0.25pF	0.55
7	CL05C020CB5NNN □		2.0pF	50	±0.25pF	0.55
8	CL05C2R2CB5NNN □		2.2pF	50	±0.25pF	0.55
9	CL05C2R4CB5NNN □		2.4pF	50	±0.25pF	0.55
10	CL05C2R5CB5NNN □		2.5pF	50	±0.25pF	0.55
11	CL05C2R7CB5NNN □		2.7pF	50	±0.25pF	0.55
12	CL05C030CB5NNN □		3.0pF	50	±0.25pF	0.55
13	CL05C3R3CB5NNN □		3.3pF	50	±0.25pF	0.55
14	CL05C3R5CB5NNN □		3.5pF	50	±0.25pF	0.55
15	CL05C3R6CB5NNN □		3.6pF	50	±0.25pF	0.55
16	CL05C3R9CB5NNN □		3.9pF	50	±0.25pF	0.55
17	CL05C040CB5NNN □		4.0pF	50	±0.25pF	0.55
18	CL05C4R3CB5NNN □		4.3pF	50	±0.25pF	0.55
19	CL05C4R7CB5NNN □		4.7pF	50	±0.25pF	0.55
20	CL05C050DB5NNN □		5.0pF	50	±0.5pF	0.55
21	CL05C5R6DB5NNN □		5.6pF	50	±0.5pF	0.55
22	CL05C060DB5NNN □		6.0pF	50	±0.5pF	0.55
23	CL05C6R2DB5NNN □		6.2pF	50	±0.5pF	0.55
24	CL05C6R8DB5NNN □		6.8pF	50	±0.5pF	0.55
25	CL05C070DB5NNN □		7.0pF	50	±0.5pF	0.55
26	CL05C080DB5NNN □		8.0pF	50	±0.5pF	0.55
27	CL05C8R2DB5NNN □		8.2pF	50	±0.5pF	0.55
28	CL05C090DB5NNN □		9.0pF	50	±0.5pF	0.55
29	CL05C9R1DB5NNN □		9.1pF	50	±0.5pF	0.55
30	CL05C100JB5NNN □		10 pF	50	±5%	0.55
31	CL05C110JB5NNN □		11 pF	50	±5%	0.55
32	CL05C120JB5NNN □		12 pF	50	±5%	0.55
33	CL05C130JB5NNN □		13 pF	50	±5%	0.55
34	CL05C150JB5NNN □		15 pF	50	±5%	0.55
35	CL05C160JB5NNN □		16 pF	50	±5%	0.55
36	CL05C180JB5NNN □		18 pF	50	±5%	0.55
37	CL05C200JB5NNN □		20 pF	50	±5%	0.55
38	CL05C220JA5NNN □		22 pF	25	±5%	0.55
39	CL05C220JB5NNN □		22 pF	50	±5%	0.55
40	CL05C240JB5NNN □		24 pF	50	±5%	0.55
41	CL05C270JB5NNN □		27 pF	50	±5%	0.55
42	CL05C270JA5NNN □		27 pF	25	±5%	0.55
43	CL05C300JB5NNN □		30 pF	50	±5%	0.55
44	CL05C330JB5NNN □		33 pF	50	±5%	0.55
45	CL05C360JB5NNN □		36 pF	50	±5%	0.55
46	CL05C390JB5NNN □		39 pF	50	±5%	0.55
47	CL05C430JB5NNN □		43 pF	50	±5%	0.55
48	CL05C470JB5NNN □		47 pF	50	±5%	0.55
49	CL05C510JB5NNN □		51 pF	50	±5%	0.55
50	CL05C560JB5NNN □		56 pF	50	±5%	0.55

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p74.

Part Numbering System

Standard & High Capacitors

Super Small Size Capacitors

High-Q Capacitors

Medium-High Voltage Capacitors

Array Type Capacitors

Low ESL Capacitors

Reliability Test Condition

Premium Capacitors for Automotive Applications

Packaging Specification

Application Manual for Surface Mounting



Product Lineup (Standard & High Capacitors-C0G)

	Part Number	Size L x W (mm)	Capacitance	Rated Voltage (Vdc)	Capacitance Tolerance	Thickness Max.(mm)
51	CL05C620JB5NNN □	1.00 × 0.50	62pF	50	±5%	0.55
52	CL05C680JB5NNN □		68pF	50	±5%	0.55
53	CL05C750JB5NNN □		75pF	50	±5%	0.55
54	CL05C820JB5NNN □		82pF	50	±5%	0.55
55	CL05C910JB5NNN □		91pF	50	±5%	0.55
56	CL05C101JB5NNN □		100pF	50	±5%	0.55
57	CL05C121JB5NNN □		120pF	50	±5%	0.55
58	CL05C151JB5NNN □		150pF	50	±5%	0.55
59	CL05C181JB5NNN □		180pF	50	±5%	0.55
60	CL05C201JB5NNN □		200pF	50	±5%	0.55
61	CL05C221JB5NNN □		220pF	50	±5%	0.55
62	CL05C271JB5NNN □		270pF	50	±5%	0.55
63	CL05C331JB5NNN □		330pF	50	±5%	0.55
64	CL05C391JB5NNN □		390pF	50	±5%	0.55
65	CL05C471JB5NNN □		470pF	50	±5%	0.55
66	CL05C471JO5NNN □		470pF	16	±5%	0.55
67	CL05C681JB5NNN □		680pF	50	±5%	0.55
68	CL05C821JB5NNN □		820pF	50	±5%	0.55
69	CL05C102JB5NNN □		1nF	50	±5%	0.55
70	CL05C102JA5NNN □		1nF	25	±5%	0.55
71	CL05C102JO5NNN □		1nF	16	±5%	0.55
1	CL10C0R3CB8NNN □	1.60 × 0.80	0.3pF	50	±0.25pF	0.90
2	CL10C0R5CB8NNN □		0.5pF	50	±0.25pF	0.90
3	CL10CR75CB8NNN □		0.75pF	50	±0.25pF	0.90
4	CL10C010CB8NNN □		1.0pF	50	±0.25pF	0.90
5	CL10C1R2CB8NNN □		1.2pF	50	±0.25pF	0.90
6	CL10C1R5CB8NNN □		1.5pF	50	±0.25pF	0.90
7	CL10C1R8CB8NNN □		1.8pF	50	±0.25pF	0.90
8	CL10C020CB8NNN □		2.0pF	50	±0.25pF	0.90
9	CL10C2R2CB8NNN □		2.2pF	50	±0.25pF	0.90
10	CL10C2R4CB8NNN □		2.4pF	50	±0.25pF	0.90
11	CL10C2R5CB8NNN □		2.5pF	50	±0.25pF	0.90
12	CL10C2R7CB8NNN □		2.7pF	50	±0.25pF	0.90
13	CL10C030CB8NNN □		3.0pF	50	±0.25pF	0.90
14	CL10C3R3CB8NNN □		3.3pF	50	±0.25pF	0.90
15	CL10C3R5CB8NNN □		3.5pF	50	±0.25pF	0.90
16	CL10C3R6CB8NNN □		3.6pF	50	±0.25pF	0.90
17	CL10C3R9CB8NNN □		3.9pF	50	±0.25pF	0.90
18	CL10C040CB8NNN □		4.0pF	50	±0.25pF	0.90
19	CL10C4R3CB8NNN □		4.3pF	50	±0.25pF	0.90
20	CL10C4R7CB8NNN □		4.7pF	50	±0.25pF	0.90
21	CL10C050DB8NNN □		5.0pF	50	±0.5pF	0.90
22	CL10C5R6DB8NNN □		5.6pF	50	±0.5pF	0.90
23	CL10C060DB8NNN □		6.0pF	50	±0.5pF	0.90
24	CL10C6R2DB8NNN □		6.2pF	50	±0.5pF	0.90
25	CL10C6R8DB8NNN □		6.8pF	50	±0.5pF	0.90
26	CL10C070DB8NNN □		7.0pF	50	±0.5pF	0.90
27	CL10C7R5DB8NNN □		7.5pF	50	±0.5pF	0.90
28	CL10C080DB8NNN □		8.0pF	50	±0.5pF	0.90
29	CL10C8R2DB8NNN □		8.2pF	50	±0.5pF	0.90

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p74.

Product Lineup (Standard & High Capacitors-C0G)

	Part Number	Size L x W (mm)	Capacitance	Rated Voltage (Vdc)	Capacitance Tolerance	Thickness Max.(mm)
30	CL10C090DB8NNN □	1.60×0.80	9.0 pF	50	±0.5pF	0.90
31	CL10C9R1DB8NNN □		9.1 pF	50	±0.5pF	0.90
32	CL10C100JB8NNN □		10 pF	50	±5%	0.90
33	CL10C110JB8NNN □		11 pF	50	±5%	0.90
34	CL10C120JB8NNN □		12 pF	50	±5%	0.90
35	CL10C130JB8NNN □		13 pF	50	±5%	0.90
36	CL10C140JB8NNN □		14 pF	50	±5%	0.90
37	CL10C150JB8NNN □		15 pF	50	±5%	0.90
38	CL10C160JB8NNN □		16 pF	50	±5%	0.90
39	CL10C180JB8NNN □		18 pF	50	±5%	0.90
40	CL10C200JB8NNN □		20 pF	50	±5%	0.90
41	CL10C220JB8NNN □		22 pF	50	±5%	0.90
42	CL10C240JB8NNN □		24 pF	50	±5%	0.90
43	CL10C250JB8NNN □		25 pF	50	±5%	0.90
44	CL10C270JB8NNN □		27 pF	50	±5%	0.90
45	CL10C300JB8NNN □		30 pF	50	±5%	0.90
46	CL10C330JB8NNN □		33 pF	50	±5%	0.90
47	CL10C360JB8NNN □		36 pF	50	±5%	0.90
48	CL10C390JB8NNN □		39 pF	50	±5%	0.90
49	CL10C430JB8NNN □		43 pF	50	±5%	0.90
50	CL10C470JB8NNN □		47 pF	50	±5%	0.90
51	CL10C510JB8NNN □		51 pF	50	±5%	0.90
52	CL10C560JB8NNN □		56 pF	50	±5%	0.90
53	CL10C620JB8NNN □		62 pF	50	±5%	0.90
54	CL10C680JB8NNN □		68 pF	50	±5%	0.90
55	CL10C750JB8NNN □		75 pF	50	±5%	0.90
56	CL10C820JB8NNN □		82 pF	50	±5%	0.90
57	CL10C910JB8NNN □		91 pF	50	±5%	0.90
58	CL10C101JB8NNN □		100 pF	50	±5%	0.90
59	CL10C111JB8NNN □		110 pF	50	±5%	0.90
60	CL10C121JB8NNN □		120 pF	50	±5%	0.90
61	CL10C131JB8NNN □		130 pF	50	±5%	0.90
62	CL10C151JB8NNN □		150 pF	50	±5%	0.90
63	CL10C161JB8NNN □		160 pF	50	±5%	0.90
64	CL10C181JB8NNN □		180 pF	50	±5%	0.90
65	CL10C201JB8NNN □		200 pF	50	±5%	0.90
66	CL10C221JB8NNN □		220 pF	50	±5%	0.90
67	CL10C241JB8NNN □		240 pF	50	±5%	0.90
68	CL10C271JB8NNN □		270 pF	50	±5%	0.90
69	CL10C301JB8NNN □		300 pF	50	±5%	0.90
70	CL10C331JB8NNN □		330 pF	50	±5%	0.90
71	CL10C361JB8NNN □		360 pF	50	±5%	0.90
72	CL10C391JB8NNN □		390 pF	50	±5%	0.90
73	CL10C431JB8NNN □		430 pF	50	±5%	0.90
74	CL10C471JB8NNN □		470 pF	50	±5%	0.90
75	CL10C511JB8NNN □		510 pF	50	±5%	0.90
76	CL10C561JB8NNN □		560 pF	50	±5%	0.90
77	CL10C621JB8NNN □		620 pF	50	±5%	0.90
78	CL10C681JB8NNN □		680 pF	50	±5%	0.90
79	CL10C751JB8NNN □		750 pF	50	±5%	0.90

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p74.

Part Numbering System

Standard & High Capacitors

Super Small Size Capacitors

High-Q Capacitors

Medium-High Voltage Capacitors

Array Type Capacitors

Low ESL Capacitors

Reliability Test Condition

Premium Capacitors for Automotive Applications

Packaging Specification

Application Manual for Surface Mounting



Product Lineup (Standard & High Capacitors-C0G)

	Part Number	Size L x W (mm)	Capacitance	Rated Voltage (Vdc)	Capacitance Tolerance	Thickness Max.(mm)
80	CL10C821JB8NNN □	1.60×0.80	820 pF	50	±5%	0.90
81	CL10C102JB8NNN □		1 nF	50	±5%	0.90
82	CL10C182JB8NNN □		1.8 nF	50	±5%	0.90
83	CL10C222JB8NNN □		2.2 nF	50	±5%	0.90
84	CL10C562JB8NNN □		5.6 nF	50	±5%	0.90
85	CL10C103JA8NNN □		10 nF	25	±5%	0.90
1	CL21CR47CBANNNN □	2.00×1.25	0.47 pF	50	±0.25 pF	0.75
2	CL21C0R5CBANNNN □		0.5 pF	50	±0.25 pF	0.75
3	CL21C010CBANNNN □		1.0 pF	50	±0.25 pF	0.75
4	CL21C1R2CBANNNN □		1.2 pF	50	±0.25 pF	0.75
5	CL21C1R5CBANNNN □		1.5 pF	50	±0.25 pF	0.75
6	CL21C1R8CBANNNN □		1.8 pF	50	±0.25 pF	0.75
7	CL21C020CBANNNN □		2.0 pF	50	±0.25 pF	0.75
8	CL21C2R2CBANNNN □		2.2 pF	50	±0.25 pF	0.75
9	CL21C2R4CBANNNN □		2.4 pF	50	±0.25 pF	0.75
10	CL21C2R5CBANNNN □		2.5 pF	50	±0.25 pF	0.75
11	CL21C2R7CBANNNN □		2.7 pF	50	±0.25 pF	0.75
12	CL21C030CBANNNN □		3.0 pF	50	±0.25 pF	0.75
13	CL21C3R2CBANNNN □		3.2 pF	50	±0.25 pF	0.75
14	CL21C3R3CBANNNN □		3.3 pF	50	±0.25 pF	0.75
15	CL21C3R6CBANNNN □		3.6 pF	50	±0.25 pF	0.75
16	CL21C3R9CBANNNN □		3.9 pF	50	±0.25 pF	0.75
17	CL21C040CBANNNN □		4.0 pF	50	±0.25 pF	0.75
18	CL21C4R7CBANNNN □		4.7 pF	50	±0.25 pF	0.75
19	CL21C5R6DBANNNN □		5.6 pF	50	±0.5 pF	0.75
20	CL21C060DBANNNN □		6.0 pF	50	±0.5 pF	0.75
21	CL21C6R8DBANNNN □		6.8 pF	50	±0.5 pF	0.75
22	CL21C070DBANNNN □		7.0 pF	50	±0.5 pF	0.75
23	CL21C7R5DBANNNN □		7.5 pF	50	±0.5 pF	0.75
24	CL21C080DBANNNN □		8.0 pF	50	±0.5 pF	0.75
25	CL21C8R2DBANNNN □		8.2 pF	50	±0.5 pF	0.75
26	CL21C090DBANNNN □		9.0 pF	50	±0.5 pF	0.75
27	CL21C100JBANNNN □		10 pF	50	±5%	0.75
28	CL21C120JBANNNN □		12 pF	50	±5%	0.75
29	CL21C130JBANNNN □		13 pF	50	±5%	0.75
30	CL21C140JBANNNN □		14 pF	50	±5%	0.75
31	CL21C150JBANNNN □		15 pF	50	±5%	0.75
32	CL21C160JBANNNN □		16 pF	50	±5%	0.75
33	CL21C180JBANNNN □		18 pF	50	±5%	0.75
34	CL21C200JBANNNN □		20 pF	50	±5%	0.75
35	CL21C220JBANNNN □		22 pF	50	±5%	0.75
36	CL21C240JBANNNN □		24 pF	50	±5%	0.75
37	CL21C250JBANNNN □		25 pF	50	±5%	0.75
38	CL21C270JBANNNN □		27 pF	50	±5%	0.75
39	CL21C300JBANNNN □		30 pF	50	±5%	0.75
40	CL21C330JBANNNN □		33 pF	50	±5%	0.75
41	CL21C360JBANNNN □		36 pF	50	±5%	0.75
42	CL21C390JBANNNN □		39 pF	50	±5%	0.75
43	CL21C430JBANNNN □		43 pF	50	±5%	0.75
44	CL21C470JBANNNN □		47 pF	50	±5%	0.75
45	CL21C510JBANNNN □		51 pF	50	±5%	0.75

* □ mark means packaging code. If you want to learn the code or quantity in detail, please see p74.

Product Lineup (Standard & High Capacitors-C0G)

	Part Number	Size L x W (mm)	Capacitance	Rated Voltage (Vdc)	Capacitance Tolerance	Thickness Max.(mm)
46	CL21C560JBANNN □	2.00×1.25	56 pF	50	±5%	0.75
47	CL21C620JBANNN □		62 pF	50	±5%	0.75
48	CL21C680JBANNN □		68 pF	50	±5%	0.75
49	CL21C750JBANNN □		75 pF	50	±5%	0.75
50	CL21C820JBANNN □		82 pF	50	±5%	0.75
51	CL21C910JBANNN □		91 pF	50	±5%	0.75
52	CL21C101JBANNN □		100 pF	50	±5%	0.75
53	CL21C111JBANNN □		110 pF	50	±5%	0.75
54	CL21C121JBANNN □		120 pF	50	±5%	0.75
55	CL21C131JBANNN □		130 pF	50	±5%	0.75
56	CL21C151JBANNN □		150 pF	50	±5%	0.75
57	CL21C161JBANNN □		160 pF	50	±5%	0.75
58	CL21C181JBANNN □		180 pF	50	±5%	0.75
59	CL21C201JBANNN □		200 pF	50	±5%	0.75
60	CL21C221JBANNN □		220 pF	50	±5%	0.75
61	CL21C241JBANNN □		240 pF	50	±5%	0.75
62	CL21C271JBANNN □		270 pF	50	±5%	0.75
63	CL21C301JBANNN □		300 pF	50	±5%	0.75
64	CL21C331JBANNN □		330 pF	50	±5%	0.75
65	CL21C361JBANNN □		360 pF	50	±5%	0.75
66	CL21C391JBANNN □		390 pF	50	±5%	0.75
67	CL21C431JBANNN □		430 pF	50	±5%	0.75
68	CL21C471JBANNN □		470 pF	50	±5%	0.75
69	CL21C511JBANNN □		510 pF	50	±5%	0.75
70	CL21C561JBANNN □		560 pF	50	±5%	0.75
71	CL21C621JBCNNN □		620 pF	50	±5%	0.95
72	CL21C681JBCNNN □		680 pF	50	±5%	0.95
73	CL21C751JBCNNN □		750 pF	50	±5%	0.95
74	CL21C821JBCNNN □		820 pF	50	±5%	0.95
75	CL21C102JBCNNN □		1 nF	50	±5%	0.95
76	CL21C122JBFNNN □	3.20×1.60	1.2 nF	50	±5%	1.35
77	CL21C152JBFNNN □		1.5 nF	50	±5%	1.35
78	CL21C182JBFNNN □		1.8 nF	50	±5%	1.35
79	CL21C222JBFNNN □		2.2 nF	50	±5%	1.35
80	CL21C332JAFNNN □		3.3 nF	25	±5%	1.35
81	CL21C332JBFNNN □		3.3 nF	50	±5%	1.35
82	CL21C392JAANNN □		3.9 nF	25	±5%	0.75
83	CL21C392JBFNNN □		3.9 nF	50	±5%	1.35
84	CL21C472JBFNNN □		4.7 nF	50	±5%	1.35
85	CL21C562JBFNNN □		5.6 nF	50	±5%	1.35
86	CL21C822JAFNNN □		8.2 nF	25	±5%	1.35
87	CL21C103JBFNNN □		10 nF	50	±5%	1.35
88	CL21C333JAFNNN □		33 nF	25	±5%	1.35
1	CL31C0R5CBCNNN □		0.5 pF	50	±0.25 pF	1.00
2	CL31C010CBCNNN □		1.0 pF	50	±0.25 pF	1.00
3	CL31C1R5CBCNNN □		1.5 pF	50	±0.25 pF	1.00
4	CL31C1R8CBCNNN □		1.8 pF	50	±0.25 pF	1.00
5	CL31C020CBCNNN □		2.0 pF	50	±0.25 pF	1.00
6	CL31C2R2CBCNNN □		2.2 pF	50	±0.25 pF	1.00
7	CL31C2R7CBCNNN □		2.7 pF	50	±0.25 pF	1.00

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p74.

Part Numbering System

Standard & High Capacitors

Super Small Size Capacitors

High-Q Capacitors

Medium-High Voltage Capacitors

Array Type Capacitors

Low ESL Capacitors

Reliability Test Condition

Premium Capacitors for Automotive Applications

Packaging Specification

Application Manual for Surface Mounting



Product Lineup (Standard & High Capacitors-C0G)

	Part Number	Size L x W (mm)	Capacitance	Rated Voltage (Vdc)	Capacitance Tolerance	Thickness Max.(mm)
8	CL31C030CBCNNN □	3.20×1.60	3.0 pF	50	±0.25 pF	1.00
9	CL31C3R3CBCNNN □		3.3 pF	50	±0.25 pF	1.00
10	CL31C040CBCNNN □		4.0 pF	50	±0.25 pF	1.00
11	CL31C4R7CBCNNN □		4.7 pF	50	±0.25 pF	1.00
12	CL31C100JBCNNN □		10 pF	50	±5%	1.00
13	CL31C120JBCNNN □		12 pF	50	±5%	1.00
14	CL31C150JBCNNN □		15 pF	50	±5%	1.00
15	CL31C180JBCNNN □		18 pF	50	±5%	1.00
16	CL31C200JBCNNN □		20 pF	50	±5%	1.00
17	CL31C220JBCNNN □		22 pF	50	±5%	1.00
18	CL31C270JBCNNN □		27 pF	50	±5%	1.00
19	CL31C300JBCNNN □		30 pF	50	±5%	1.00
20	CL31C330JBCNNN □		33 pF	50	±5%	1.00
21	CL31C390JBCNNN □		39 pF	50	±5%	1.00
22	CL31C470JBCNNN □		47 pF	50	±5%	1.00
23	CL31C510JBCNNN □		51 pF	50	±5%	1.00
24	CL31C560JBCNNN □		56 pF	50	±5%	1.00
25	CL31C680JBCNNN □		68 pF	50	±5%	1.00
26	CL31C750JBCNNN □		75 pF	50	±5%	1.00
27	CL31C820JBCNNN □		82 pF	50	±5%	1.00
28	CL31C101JBCNNN □		100 pF	50	±5%	1.00
29	CL31C121JBCNNN □		120 pF	50	±5%	1.00
30	CL31C151JBCNNN □		150 pF	50	±5%	1.00
31	CL31C181JBCNNN □		180 pF	50	±5%	1.00
32	CL31C221JBCNNN □		220 pF	50	±5%	1.00
33	CL31C271JBCNNN □		270 pF	50	±5%	1.00
34	CL31C331JBCNNN □		330 pF	50	±5%	1.00
35	CL31C391JBCNNN □		390 pF	50	±5%	1.00
36	CL31C471JBCNNN □		470 pF	50	±5%	1.00
37	CL31C561JBCNNN □		560 pF	50	±5%	1.00
38	CL31C681JBCNNN □		680 pF	50	±5%	1.00
39	CL31C821JBCNNN □		820 pF	50	±5%	1.00
40	CL31C102JBCNNN □		1 nF	50	±5%	1.00
41	CL31C122JBCNNN □		1.2 nF	50	±5%	1.00
42	CL31C152JBCNNN □		1.5 nF	50	±5%	1.00
43	CL31C182JBCNNN □		1.8 nF	50	±5%	1.00
44	CL31C222JBCNNN □		2.2 nF	50	±5%	1.00
45	CL31C272JBFNNN □		2.7 nF	50	±5%	1.40
46	CL31C332JBFNNN □		3.3 nF	50	±5%	1.40
47	CL31C472JBFNNN □		4.7 nF	50	±5%	1.40
48	CL31C682JBHNNN □		6.8 nF	50	±5%	1.80
49	CL31C103JAFNNN □		10 nF	25	±5%	1.40
50	CL31C223JBHNNN □		22 nF	50	±5%	1.80
51	CL31C333JBHNNN □		33 nF	50	±5%	1.80
52	CL31C473JBHNNN □		47 nF	50	±5%	1.80
53	CL31C683JAHHNNN □		68 nF	25	±5%	1.80
54	CL31C104JAHHNNN □		100 nF	25	±5%	1.80
1	CL32C472JBFNNN □	3.20×2.50	4.7 nF	50	±5%	1.45
2	CL32C103JBFNNN □		10 nF	50	±5%	1.45
3	CL32C223JBHNNN □		22 nF	50	±5%	1.80
4	CL32C333JBHNNN □		33 nF	50	±5%	1.80
5	CL32C473JBHNNN □		47 nF	50	±5%	1.80

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p74.

Product Lineup (Standard & High Capacitors-X5R)

	Part Number	Size L x W (mm)	Capacitance	Rated Voltage (Vdc)	Capacitance Tolerance	Thickness Max.(mm)
1	CL05A223KO5NNN□	1.00×0.50	22 nF	16	±10%	0.55
2	CL05A104KA5NNN□		0.1 μF	25	±10%	0.55
3	CL05A104KO5NNN□		0.1 μF	16	±10%	0.55
4	CL05A104KP5NNN□		0.1 μF	10	±10%	0.55
5	CL05A224KA5NNN□		0.22 μF	25	±10%	0.55
6	CL05A224KP5NNN□		0.22 μF	10	±10%	0.55
7	CL05A334KA5NNN□		0.33 μF	25	±10%	0.55
8	CL05A334KP5NNN□		0.33 μF	10	±10%	0.55
9	CL05A474KA5NNN□		0.47 μF	25	±10%	0.55
10	CL05A474KO5NNN□		0.47 μF	16	±10%	0.55
11	CL05A474KP5NNN□		0.47 μF	10	±10%	0.55
12	CL05A474KQ5NNN□		0.47 μF	6.3	±10%	0.55
13	CL05A474KR5NNN□		0.47 μF	4	±10%	0.55
14	CL05A105KA5NQN□		1 μF	25	±10%	0.60
15	CL05A105KO5NNN□		1 μF	16	±10%	0.55
16	CL05A105KQ3LQN□		1 μF	16	±10%	0.33
17	CL05A105KP5NNN□		1 μF	10	±10%	0.55
18	CL05A105KP3LNN□		1 μF	10	±10%	0.33
19	CL05A105KQ5NNN□		1 μF	6.3	±10%	0.55
20	CL05A105KQ3LNN□		1 μF	6.3	±10%	0.33
21	CL05A105KR5NNN□		1 μF	4	±10%	0.55
22	CL05A105KR3LNN□		1 μF	4	±10%	0.33
23	CL05A225MA5NUN□		2.2 μF	25	±20%	0.70
24	CL05A225KO5NQN□		2.2 μF	16	±10%	0.60
25	CL05A225MP5NSN□		2.2 μF	10	±20%	0.57
26	CL05A225KP3LRN□		2.2 μF	10	±10%	0.33
27	CL05A225MQ5NNN□		2.2 μF	6.3	±20%	0.55
28	CL05A225KQ3LRN□		2.2 μF	6.3	±10%	0.33
29	CL05A225MR5NNN□		2.2 μF	4	±20%	0.55
30	CL05A225KR3LRN□		2.2 μF	4	±10%	0.33
31	CL05A475MO5NUN□		4.7 μF	16	±20%	0.70
32	CL05A475MP5NRN□		4.7 μF	10	±20%	0.65
33	CL05A475MQ5NRN□		4.7 μF	6.3	±20%	0.65
34	CL05A475MQ3LUN□		4.7 μF	6.3	±20%	0.35
35	CL05A106MP5NUN□		10 μF	10	±20%	0.70
36	CL05A106MQ5NUN□		10 μF	6.3	±20%	0.70
37	CL05A106MR5NRN□		10 μF	4	±20%	0.65
38	CL05A156MR5NUN□		15 μF	4	±20%	0.70
39	CL05A226MR5NZN□		22 μF	4	±20%	0.90
1	CL10A474KB8NNN□	1.60×0.80	0.47 μF	50	±10%	0.90
2	CL10A474KA8NNN□		0.47 μF	25	±10%	0.90
3	CL10A474KP8NNN□		0.47 μF	10	±10%	0.90
4	CL10A474KQ8NNN□		0.47 μF	6.3	±10%	0.90
5	CL10A474KR8NNN□		0.47 μF	4	±10%	0.90
6	CL10A105KB8NNN□		1 μF	50	±10%	0.90
7	CL10A105KA5LNN□		1 μF	25	±10%	0.50
8	CL10A105KA8NNN□		1 μF	25	±10%	0.90
9	CL10A105KO8NNN□		1 μF	16	±10%	0.90
10	CL10A105KO5LNN□		1 μF	16	±10%	0.50
11	CL10A105KP8NNN□		1 μF	10	±10%	0.90
12	CL10A105KP5LNN□		1 μF	10	±10%	0.50
13	CL10A105KQ8NNN□		1 μF	6.3	±10%	0.90
14	CL10A105KQ5LNN□		1 μF	6.3	±10%	0.50

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p74.

Part Numbering System

Standard & High Capacitors

Super Small Size Capacitors

High-Q Capacitors

Medium-High Voltage Capacitors

Array Type Capacitors

Low ESL Capacitors

Reliability Test Condition

Premium Capacitors for Automotive Applications

Packaging Specification

Application Manual for Surface Mounting



Product Lineup (Standard & High Capacitors-X5R)

	Part Number	Size L x W (mm)	Capacitance	Rated Voltage (Vdc)	Capacitance Tolerance	Thickness Max.(mm)
15	CL10A105KR8NNN □	1.60×0.80	1 μ F	4	$\pm 10\%$	0.90
16	CL10A105KR5LNN □		1 μ F	4	$\pm 10\%$	0.50
17	CL10A105KA5LNN □		1 μ F	25	$\pm 10\%$	0.50
18	CL10A225KA8NNN □		2.2 μ F	25	$\pm 10\%$	0.90
19	CL10A225KA5LNN □		2.2 μ F	25	$\pm 10\%$	0.50
20	CL10A225KO8NNN □		2.2 μ F	16	$\pm 10\%$	0.90
21	CL10A225KO5LNN □		2.2 μ F	16	$\pm 10\%$	0.50
22	CL10A225KP8NNN □		2.2 μ F	10	$\pm 10\%$	0.90
23	CL10A225KP5LNN □		2.2 μ F	10	$\pm 10\%$	0.50
24	CL10A225KQ8NNN □		2.2 μ F	6.3	$\pm 10\%$	0.90
25	CL10A225KQ5LNN □		2.2 μ F	6.3	$\pm 10\%$	0.50
26	CL10A225KR8NNN □		2.2 μ F	4	$\pm 10\%$	0.90
27	CL10A225KR5LNN □		2.2 μ F	4	$\pm 10\%$	0.50
28	CL10A335KQ8NNN □		3.3 μ F	6.3	$\pm 10\%$	0.90
29	CL10A335KR8NNN □		3.3 μ F	4	$\pm 10\%$	0.90
30	CL10A475KA8NQN □		4.7 μ F	25	$\pm 10\%$	0.95
31	CL10A475KO8NNN □		4.7 μ F	16	$\pm 10\%$	0.90
32	CL10A475KP8NNN □		4.7 μ F	10	$\pm 10\%$	0.90
33	CL10A475KP5LNN □		4.7 μ F	10	$\pm 10\%$	0.50
34	CL10A475KQ5LNN □		4.7 μ F	6.3	$\pm 10\%$	0.50
35	CL10A475KQ8NNN □		4.7 μ F	6.3	$\pm 10\%$	0.90
36	CL10A475KR5LNN □		4.7 μ F	4	$\pm 10\%$	0.50
37	CL10A475KR8NNN □		4.7 μ F	4	$\pm 10\%$	0.90
38	CL10A106KR8NNN □		10 μ F	4	$\pm 10\%$	0.90
39	CL10A106MR5LRN □		10 μ F	4	$\pm 20\%$	0.50
40	CL10A106KQ8NNN □		10 μ F	6.3	$\pm 10\%$	0.90
41	CL10A106MQ5LRN □		10 μ F	6.3	$\pm 20\%$	0.50
42	CL10A106MP8NNN □		10 μ F	10	$\pm 20\%$	0.90
43	CL10A106MO8NQN □		10 μ F	16	$\pm 20\%$	0.95
44	CL10A106MA8NRN □		10 μ F	25	$\pm 20\%$	1.00
45	CL10A226MR8NRN □		22 μ F	4	$\pm 20\%$	1.00
46	CL10A226MQ8NRN □		22 μ F	6.3	$\pm 20\%$	1.00
47	CL10A226MP8NRN □		22 μ F	10	$\pm 20\%$	1.00
48	CL10A226MP8NUN □		22 μ F	10	$\pm 20\%$	1.05
49	CL10A476MR8NZN □		47 μ F	4	$\pm 20\%$	1.10
50	CL10A476MQ8CZN □		47 μ F	6.3	$\pm 20\%$	1.10
1	CL21A105KBQNNN □	2.00×1.25	1 μ F	50	$\pm 10\%$	1.40
2	CL21A105KAFNNN □		1 μ F	25	$\pm 10\%$	1.35
3	CL21A105KA6LNN □		1 μ F	25	$\pm 10\%$	0.70
4	CL21A105KOFNNN □		1 μ F	16	$\pm 10\%$	1.35
5	CL21A105KO6LNN □		1 μ F	16	$\pm 10\%$	0.70
6	CL21A105KQFNNN □		1 μ F	6.3	$\pm 10\%$	1.35
7	CL21A105KRFNNN □		1 μ F	4	$\pm 10\%$	1.35
8	CL21A225KBQNNN □		2.2 μ F	50	$\pm 10\%$	1.40
9	CL21A225KAFNNN □		2.2 μ F	25	$\pm 10\%$	1.35
10	CL21A225KO6LNN □		2.2 μ F	16	$\pm 10\%$	0.70
11	CL21A225KOFNNN □		2.2 μ F	16	$\pm 10\%$	1.35
12	CL21A225KPFNNN □		2.2 μ F	10	$\pm 10\%$	1.35
13	CL21A225KQFNNN □		2.2 μ F	6.3	$\pm 10\%$	1.35
14	CL21A225KRFNNN □		2.2 μ F	4	$\pm 10\%$	1.35
15	CL21A475KBQNNN □		4.7 μ F	50	$\pm 10\%$	1.40

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p74.

Product Lineup (Standard & High Capacitors-X5R)

	Part Number	Size L x W (mm)	Capacitance	Rated Voltage (Vdc)	Capacitance Tolerance	Thickness Max.(mm)
16	CL21A475KAQNNN □	2.00 × 1.25	4.7 μ F	25	±10%	1.40
17	CL21A475KACLRN □		4.7 μ F	25	±10%	0.95
18	CL21A475KOFNNN □		4.7 μ F	16	±10%	1.35
19	CL21A475KOCLNN □		4.7 μ F	16	±10%	0.95
20	CL21A475KPFNNN □		4.7 μ F	10	±10%	1.35
21	CL21A475KPCLNN □		4.7 μ F	10	±10%	0.95
22	CL21A475KQFNNN □		4.7 μ F	6.3	±10%	1.35
23	CL21A475KQCLNN □		4.7 μ F	6.3	±10%	0.95
24	CL21A475KRFNNN □		4.7 μ F	4	±10%	1.35
25	CL21A475KRCLNN □		4.7 μ F	4	±10%	0.95
26	CL21A106KAYNNN □		10 μ F	25	±10%	1.45
27	CL21A106KACLRN □		10 μ F	25	±10%	0.95
28	CL21A106KA7LQN □		10 μ F	25	±10%	0.80
29	CL21A106KOFNNN □		10 μ F	16	±10%	1.35
30	CL21A106KOQNNN □		10 μ F	16	±10%	1.40
31	CL21A106KOCLR □		10 μ F	16	±10%	0.95
32	CL21A106KOCL3R □		10 μ F	16	±10%	0.95
33	CL21A106KPFNNN □		10 μ F	10	±10%	1.35
34	CL21A106KPCLQN □		10 μ F	10	±10%	0.95
35	CL21A106KQFNNN □		10 μ F	6.3	±10%	1.35
36	CL21A106KQCLNN □		10 μ F	6.3	±10%	0.95
37	CL21A106KRFNNN □		10 μ F	4	±10%	1.35
38	CL21A106KRCNN □		10 μ F	4	±10%	0.95
39	CL21A226MAQNNN □		22 μ F	25	±20%	1.40
40	CL21A226MPQNNN □		22 μ F	10	±20%	1.40
41	CL21A226MPCLRN □		22 μ F	10	±20%	0.95
42	CL21A226MQQNNN □		22 μ F	6.3	±20%	1.40
43	CL21A226MQCLRN □		22 μ F	6.3	±20%	0.95
44	CL21A226MRQNNN □		22 μ F	4	±20%	1.40
45	CL21A226MRCLRN □		22 μ F	4	±20%	0.95
46	CL21A336MQELNN □		33 μ F	6.3	±20%	1.20
47	CL21A336MQ9LNN □		33 μ F	6.3	±20%	1.00
48	CL21A336MRELNN □		33 μ F	4	±20%	1.20
49	CL21A336MR9LNN □		33 μ F	4	±20%	1.00
50	CL21A476MQYNNN □		47 μ F	6.3	±20%	1.45
51	CL21A476MRYNNN □		47 μ F	4	±20%	1.45
52	CL21A476MQ9LRN □		47 μ F	6.3	±20%	1.00
1	CL31A225KC9LNN □	3.20 × 1.60	2.2 μ F	100	±10%	1.00
2	CL31A475KBHNNN □		4.7 μ F	50	±10%	1.80
3	CL31A475KB9LNN □		4.7 μ F	50	±10%	1.00
4	CL31A475KAHNNN □		4.7 μ F	25	±10%	1.80
5	CL31A475KACLRN □		4.7 μ F	25	±10%	0.95
6	CL31A475KOHN>NN □		4.7 μ F	16	±10%	1.80
7	CL31A475KOCLNN □		4.7 μ F	16	±10%	0.95
8	CL31A475KPHNNN □		4.7 μ F	10	±10%	1.80
9	CL31A475KQHNNN □		4.7 μ F	6.3	±10%	1.80
10	CL31A475KRHNNN □		4.7 μ F	4	±10%	1.80
11	CL31A106KBHNNN □		10 μ F	50	±10%	1.80
12	CL31A106KAHNNN □		10 μ F	25	±10%	1.80
13	CL31A106KACLRN □		10 μ F	25	±10%	0.95
14	CL31A106KOHN>NN □		10 μ F	16	±10%	1.80

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p74.

Part Numbering System

Standard & High Capacitors

Super Small Size Capacitors

High-Q Capacitors

Medium-High Voltage Capacitors

Array Type Capacitors

Low ESL Capacitors

Reliability Test Condition

Premium Capacitors for Automotive Applications

Packaging Specification

Application Manual for Surface Mounting

Product Lineup (Standard & High Capacitors-X5R)

	Part Number	Size L x W (mm)	Capacitance	Rated Voltage (Vdc)	Capacitance Tolerance	Thickness Max.(mm)
15	CL31A106KOCLNN □	3.20×1.60	10 μ F	16	$\pm 10\%$	0.95
16	CL31A106KPHNNN □		10 μ F	10	$\pm 10\%$	1.80
17	CL31A106KPCLNN □		10 μ F	10	$\pm 10\%$	0.95
18	CL31A106KQHNNN □		10 μ F	6.3	$\pm 10\%$	1.80
19	CL31A106KRHNNN □		10 μ F	4	$\pm 10\%$	1.80
20	CL31A156KQHNNN □		15 μ F	6.3	$\pm 10\%$	1.80
21	CL31A156KRHNNN □		15 μ F	4	$\pm 10\%$	1.80
22	CL31A226KAHNNN □		22 μ F	25	$\pm 10\%$	1.80
23	CL31A226KOHNNN □		22 μ F	16	$\pm 10\%$	1.80
24	CL31A226KOCLNN □		22 μ F	16	$\pm 10\%$	0.95
25	CL31A226KPHNNN □		22 μ F	10	$\pm 10\%$	1.80
26	CL31A226KPCLNN □		22 μ F	10	$\pm 10\%$	0.95
27	CL31A226KQHNNN □		22 μ F	6.3	$\pm 10\%$	1.80
28	CL31A476KPHNNN □		47 μ F	10	$\pm 10\%$	1.80
29	CL31A476MQHNNN □		47 μ F	6.3	$\pm 20\%$	1.80
30	CL31A476MRHNNN □		47 μ F	4	$\pm 20\%$	1.80
31	CL31A107MQHNNN □		100 μ F	6.3	$\pm 20\%$	1.80
32	CL31A107MRHNNN □		100 μ F	4	$\pm 20\%$	1.80
33	CL31A107MPHNNN □		100 μ F	10	$\pm 20\%$	1.80
1	CL32A106KQCLNN □	3.20×2.50	10 μ F	6.3	$\pm 10\%$	0.95
2	CL32A106KRCLNN □		10 μ F	4	$\pm 10\%$	0.95
3	CL32A106KBULNN □		10 μ F	50	$\pm 10\%$	2.00
4	CL32A106KAJNNN □		10 μ F	25	$\pm 10\%$	2.70
5	CL32A106KAULNN □		10 μ F	25	$\pm 10\%$	2.00
6	CL32A106KOJNNN □		10 μ F	16	$\pm 10\%$	2.70
7	CL32A106KPJNNN □		10 μ F	10	$\pm 10\%$	2.70
8	CL32A226KAJNNN □		22 μ F	25	$\pm 10\%$	2.70
9	CL32A226KOJNNN □		22 μ F	16	$\pm 10\%$	2.70
10	CL32A226KOCLNN □		22 μ F	16	$\pm 10\%$	0.95
11	CL32A226KPJNNN □		22 μ F	10	$\pm 10\%$	2.70
12	CL32A226KQJNNN □		22 μ F	6.3	$\pm 10\%$	2.70
13	CL32A226MQCLNN □		22 μ F	6.3	$\pm 20\%$	0.95
14	CL32A226KRJNNN □		22 μ F	4	$\pm 10\%$	2.70
15	CL32A226MRCLNN □		22 μ F	4	$\pm 20\%$	0.95
16	CL32A476KOJNNN □		47 μ F	16	$\pm 10\%$	2.70
17	CL32A476KPJNNN □		47 μ F	10	$\pm 10\%$	2.70
18	CL32A476MQJNNN □		47 μ F	6.3	$\pm 20\%$	2.70
19	CL32A476MRJNNN □		47 μ F	4	$\pm 20\%$	2.70
20	CL32A107MPVNNN □		100 μ F	10	$\pm 20\%$	2.80
21	CL32A107MQVNNN □		100 μ F	6.3	$\pm 20\%$	2.80
22	CL32A107MRVNNN □		100 μ F	4	$\pm 20\%$	2.80
23	CL32A157MQVNNN □		150 μ F	6.3	$\pm 20\%$	2.80
24	CL32A227MQVNNN □		220 μ F	6.3	$\pm 20\%$	2.80
1	CL43A476MQJNNN □	4.50×3.20	47 μ F	6.3	$\pm 20\%$	2.70
2	CL43A476MRJNNN □		47 μ F	4	$\pm 20\%$	2.70
3	CL43A107KQLNNN □		100 μ F	6.3	$\pm 10\%$	3.50
4	CL43A107KRLNNN □		100 μ F	4	$\pm 10\%$	3.50

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p74.

Product Lineup (Standard & High Capacitors-X6S)

	Part Number	Size L x W (mm)	Capacitance	Rated Voltage (Vdc)	Capacitance Tolerance	Thickness Max.(mm)
1	CL05X224KP5NNN □	1.00×0.50	0.22 µF	10	±10%	0.55
2	CL05X224KQ5NNN □		0.22 µF	6.3	±10%	0.55
3	CL05X474KP5NNN □		0.47 µF	10	±10%	0.55
4	CL05X474KQ5NNN □		0.47 µF	6.3	±10%	0.55
5	CL05X474MR5NNN □		0.47 µF	4	±20%	0.55
6	CL05X684JQ5NNN □		0.68 µF	6.3	±5%	0.55
7	CL05X105KA5NQN □		1 µF	25	±10%	0.60
8	CL05X105KP5NNN □		1 µF	10	±10%	0.55
9	CL05X105MQ3LNN □		1 µF	6.3	±20%	0.33
10	CL05X225MP5NUN □		2.2 µF	10	±20%	0.70
11	CL05X475MQ5NUN □		4.7 µF	6.3	±20%	0.70
12	CL05X106MR5NUN □		10 µF	4	±20%	0.70
1	CL10X474KA8NNN □	1.60×0.80	0.47 µF	25	±10%	0.90
2	CL10X474KO8NNN □		0.47 µF	16	±10%	0.90
3	CL10X474KP8NNN □		0.47 µF	10	±10%	0.90
4	CL10X474KQ8NNN □		0.47 µF	6.3	±10%	0.90
5	CL10X474KR8NNN □		0.47 µF	4	±10%	0.90
6	CL10X105KA8NNN □		1 µF	25	±10%	0.90
7	CL10X105KO8NNN □		1 µF	16	±10%	0.90
8	CL10X105KP8NNN □		1 µF	10	±10%	0.90
9	CL10X105KQ8NNN □		1 µF	6.3	±10%	0.90
10	CL10X105KR8NNN □		1 µF	4	±10%	0.90
11	CL10X225KO8NNN □		2.2 µF	16	±10%	0.90
12	CL10X225KP8NNN □		2.2 µF	10	±10%	0.90
13	CL10X225KQ8NNN □		2.2 µF	6.3	±10%	0.90
14	CL10X225KR8NNN □		2.2 µF	4	±10%	0.90
15	CL10X475KA8NQN □		4.7 µF	25	±10%	0.95
16	CL10X475KO8NQN □		4.7 µF	16	±10%	0.95
17	CL10X475KP5NNN □		4.7 µF	10	±10%	0.90
18	CL10X475KQ8NNN □		4.7 µF	6.3	±10%	0.90
19	CL10X475KR8NNN □		4.7 µF	4	±10%	0.90
20	CL10X106MP8NNN □		10 µF	10	±20%	0.90
21	CL10X106KQ8NNN □		10 µF	6.3	±10%	0.90
22	CL10X106KR8NNN □		10 µF	4	±10%	0.90
1	CL21X105KAFNNN □	2.00×1.25	1 µF	25	±10%	1.35
2	CL21X105KOFNNN □		1 µF	16	±10%	1.35
3	CL21X105KPFNNN □		1 µF	10	±10%	1.35
4	CL21X105KQFNNN □		1 µF	6.3	±10%	1.35
5	CL21X105KRFNNN □		1 µF	4	±10%	1.35
6	CL21X225KAFNNN □		2.2 µF	25	±10%	1.35
7	CL21X225KOFNNN □		2.2 µF	16	±10%	1.35
8	CL21X225KPFNNN □		2.2 µF	10	±10%	1.35
9	CL21X225KQFNNN □		2.2 µF	6.3	±10%	1.35
10	CL21X225KRFNNN □		2.2 µF	4	±10%	1.35
11	CL21X475KAQNNN □		4.7 µF	25	±10%	1.40
12	CL21X475KOFNNN □		4.7 µF	16	±10%	1.35
13	CL21X475KPFNNN □		4.7 µF	10	±10%	1.35
14	CL21X475KQFNNN □		4.7 µF	6.3	±10%	1.35

* □ mark means packaging code. If you want to learn the code or quantity in detail, please see p74.

Part Numbering System

Standard & High Capacitors

Super Small Size Capacitors

High-Q Capacitors

Medium-High Voltage Capacitors

Array Type Capacitors

Low ESL Capacitors

Reliability Test Condition

Premium Capacitors for Automotive Applications

Packaging Specification

Application Manual for Surface Mounting



Product Lineup (Standard & High Capacitors-X6S)

	Part Number	Size L x W (mm)	Capacitance	Rated Voltage (Vdc)	Capacitance Tolerance	Thickness Max.(mm)
15	CL21X475KRFNNN □	2.00×1.25	4.7μF	4	±10%	1.35
16	CL21X106KACLRН □		10μF	25	±10%	0.95
17	CL21X106KAYNNN □		10μF	25	±10%	1.45
18	CL21X106KOYNNN □		10μF	16	±10%	1.45
19	CL21X106KPCLNN □		10μF	10	±10%	0.95
20	CL21X106KPYNNN □		10μF	10	±10%	1.45
21	CL21X106KQQNNN □		10μF	6.3	±10%	1.40
22	CL21X106KRQNNN □		10μF	4	±10%	1.40
23	CL21X106KRCLNN □		10μF	4	±10%	0.95
24	CL21X226MQQNNN □		22μF	6.3	±20%	1.40
25	CL21X226MRQNNN □		22μF	4	±20%	1.40
26	CL21X476MRYNNN □		47μF	4	±20%	1.45
1	CL31X475KAHNНН □	3.20×1.60	4.7μF	25	±10%	1.80
2	CL31X475KA CLRН □		4.7μF	25	±10%	0.95
3	CL31X475KOHННН □		4.7μF	16	±10%	1.80
4	CL31X475KPHННН □		4.7μF	10	±10%	1.80
5	CL31X475MQHННН □		4.7μF	6.3	±20%	1.80
6	CL31X475KRHННН □		4.7μF	4	±10%	1.80
7	CL31X106KA CLRН □		10μF	25	±10%	0.95
8	CL31X106KAHNНН □		10μF	25	±10%	1.80
9	CL31X106KOHННН □		10μF	16	±10%	1.80
10	CL31X106KPHННН □		10μF	10	±10%	1.80
11	CL31X106KQHННН □		10μF	6.3	±10%	1.80
12	CL31X106KRHННН □		10μF	4	±10%	1.80
13	CL31X226KOHННН □		22μF	16	±10%	1.80
14	CL31X226KPHННН □		22μF	10	±10%	1.80
15	CL31X226KQHННН □		22μF	6.3	±10%	1.80
16	CL31X226KRHННН □		22μF	4	±10%	1.80
17	CL31X107MQHННН □		100μF	6.3	±20%	1.80
18	CL31X107MRHННН □		100μF	4	±20%	1.80
1	CL32X106KAUNНН □	3.20×2.50	10μF	25	±10%	2.00
2	CL32X106KOJННН □		10μF	16	±10%	2.70
3	CL32X106KPJННН □		10μF	10	±10%	2.70
4	CL32X106KQJННН □		10μF	6.3	±10%	2.70
5	CL32X106KRJННН □		10μF	4	±10%	2.70
6	CL32X226KAJННН □		22μF	25	±10%	2.70
7	CL32X226KOJННН □		22μF	16	±10%	2.70
8	CL32X226KPJННН □		22μF	10	±10%	2.70
9	CL32X226KQJННН □		22μF	6.3	±10%	2.70
10	CL32X226KRJННН □		22μF	4	±10%	2.70
11	CL32X476MPJННН □		47μF	10	±20%	2.70
12	CL32X476KQJННН □		47μF	6.3	±10%	2.70
13	CL32X476KRJННН □		47μF	4	±10%	2.70
14	CL32X107MQVННН □		100μF	6.3	±20%	2.80
15	CL32X107MRVННН □		100μF	4	±20%	2.80

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p74.

Product Lineup (Standard & High Capacitors-X7R, X7S)

	Part Number	Size L x W (mm)	Capacitance	Rated Voltage (Vdc)	Capacitance Tolerance	Thickness Max.(mm)
1	CL05B151KB5NNN □	1.00×0.50	150pF	50	±10%	0.55
2	CL05B181KB5NNN □		180pF	50	±10%	0.55
3	CL05B221KB5NNN □		220pF	50	±10%	0.55
4	CL05B271KB5NNN □		270pF	50	±10%	0.55
5	CL05B331KB5NNN □		330pF	50	±10%	0.55
6	CL05B391KB5NNN □		390nF	50	±10%	0.55
7	CL05B471KB5NNN □		470pF	50	±10%	0.55
8	CL05B561KB5NNN □		560pF	50	±10%	0.55
9	CL05B681KB5NNN □		680pF	50	±10%	0.55
10	CL05B102KB5NNN □		1nF	50	±10%	0.55
11	CL05B122KB5NNN □		1.2nF	50	±10%	0.55
12	CL05B152KB5NNN □		1.5nF	50	±10%	0.55
13	CL05B182KB5NNN □		1.8nF	50	±10%	0.55
14	CL05B222KB5NNN □		2.2nF	50	±10%	0.55
15	CL05B272KB5NNN □		2.7nF	50	±10%	0.55
16	CL05B332KB5NNN □		3.3nF	50	±10%	0.55
17	CL05B472KB5NNN □		4.7nF	50	±10%	0.55
18	CL05B562KB5NNN □		5.6nF	50	±10%	0.55
19	CL05B682KB5NNN □		6.8nF	50	±10%	0.55
20	CL05B822KB5NNN □		8.2nF	50	±10%	0.55
21	CL05B103KB5NNN □		10nF	50	±10%	0.55
22	CL05B123KA5NNN □		12nF	25	±10%	0.55
23	CL05B153KA5NNN □		15nF	25	±10%	0.55
24	CL05B223KA5NNN □		22nF	25	±10%	0.55
25	CL05B273KO5NNN □		27nF	16	±10%	0.55
26	CL05B333KO5NNN □		33nF	16	±10%	0.55
27	CL05B393KO5NNN □		39nF	16	±10%	0.55
28	CL05B473KO5NNN □		47nF	16	±10%	0.55
29	CL05B563KO5NNN □		56nF	16	±10%	0.55
30	CL05B683KO5NNN □		68nF	16	±10%	0.55
31	CL05B823KO5NNN □		82nF	16	±10%	0.55
32	CL05B104KO5NNN □		100nF	16	±10%	0.55
33	CL05B224KO5NNN □		220nF	16	±10%	0.55
34	CL05B474KP5NNN □		470nF	10	±10%	0.55
35	CL05B105KQ5NQN □		1μF	6.3	±10%	0.60
1	CL05Y474KP5NNN □	1.00×0.50	470nF	10	±10%	0.55
37	CL10B101KB8NNN □	1.60×0.80	100pF	50	±10%	0.90
38	CL10B121KB8NNN □		120pF	50	±10%	0.90
39	CL10B151KB8NNN □		150pF	50	±10%	0.90
40	CL10B181KB8NNN □		180pF	50	±10%	0.90
41	CL10B201KB8NNN □		200pF	50	±10%	0.90
42	CL10B221KB8NNN □		220pF	50	±10%	0.90
43	CL10B271KB8NNN □		270pF	50	±10%	0.90
44	CL10B331KB8NNN □		330pF	50	±10%	0.90
45	CL10B391KB8NNN □		390pF	50	±10%	0.90
46	CL10B471KB8NNN □		470pF	50	±10%	0.90
47	CL10B561KB8NNN □		560pF	50	±10%	0.90
48	CL10B681KB8NNN □		680pF	50	±10%	0.90
49	CL10B751KB8NNN □		750pF	50	±10%	0.90
50	CL10B821KB8NNN □		820pF	50	±10%	0.90
51	CL10B102KB8NNN □		1nF	50	±10%	0.90
52	CL10B122KB8NNN □		1.2nF	50	±10%	0.90

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p74.

Part Numbering System

Standard & High Capacitors

Super Small Size Capacitors

High-Q Capacitors

Medium-High Voltage Capacitors

Array Type Capacitors

Low ESL Capacitors

Reliability Test Condition

Premium Capacitors for Automotive Applications

Packaging Specification

Application Manual for Surface Mounting



Product Lineup (Standard & High Capacitors-X7R)

	Part Number	Size L x W (mm)	Capacitance	Rated Voltage (Vdc)	Capacitance Tolerance	Thickness Max.(mm)
53	CL10B152KB8NNN □	1.60×0.80	1.5nF	50	±10%	0.90
54	CL10B182KB8NNN □		1.8nF	50	±10%	0.90
55	CL10B202KB8NNN □		2nF	50	±10%	0.90
56	CL10B222KB8NNN □		2.2nF	50	±10%	0.90
57	CL10B332KB8NNN □		3.3nF	50	±10%	0.90
58	CL10B392KB8NNN □		3.9nF	50	±10%	0.90
59	CL10B472KB8NNN □		4.7nF	50	±10%	0.90
60	CL10B562KB8NNN □		5.6nF	50	±10%	0.90
61	CL10B682KB8NNN □		6.8nF	50	±10%	0.90
62	CL10B822KB8NNN □		8.2nF	50	±10%	0.90
63	CL10B103JB8NNN □		10nF	50	±5%	0.90
64	CL10B123KB8NNN □		12nF	50	±10%	0.90
65	CL10B153KB8NNN □		15nF	50	±10%	0.90
66	CL10B183KB8NNN □		18nF	50	±10%	0.90
67	CL10B223KB8NNN □		22nF	50	±10%	0.90
68	CL10B273KB8NNN □		27nF	50	±10%	0.90
69	CL10B333JB8NNN □		33nF	50	±5%	0.90
70	CL10B393KB8NNN □		39nF	50	±10%	0.90
71	CL10B473KB8NNN □		47nF	50	±10%	0.90
72	CL10B563KB8NNN □		56nF	50	±10%	0.90
73	CL10B683KB8NNN □		68nF	50	±10%	0.90
74	CL10B823KB8NNN □		82nF	50	±10%	0.90
75	CL10B104KB8NNN □		100nF	50	±10%	0.90
76	CL10B124KO8NNN □		120nF	16	±10%	0.90
77	CL10B154KA8NNN □		150nF	25	±10%	0.90
78	CL10B224KA8NNN □		220nF	25	±10%	0.90
79	CL10B474KA8NNN □		470nF	25	±10%	0.90
80	CL10B684KO8NNN □		680nF	16	±10%	0.90
81	CL10B105KA8NNN □		1μF	25	±10%	0.90
82	CL10B225KP8NNN □		2.2μF	10	±10%	0.90
1	CL21B151KBANN □	2.00×1.25	150pF	50	±10%	0.75
2	CL21B181KBANN □		180pF	50	±10%	0.75
3	CL21B221KBANN □		220pF	50	±10%	0.75
4	CL21B331KBANN □		330pF	50	±10%	0.75
5	CL21B391KBANN □		390pF	50	±10%	0.75
6	CL21B471KBANN □		470pF	50	±10%	0.75
7	CL21B511KBANN □		510pF	50	±10%	0.75
8	CL21B561KBANN □		560pF	50	±10%	0.75
9	CL21B681KBANN □		680pF	50	±10%	0.75
10	CL21B821KBANN □		820pF	50	±10%	0.75
11	CL21B102KBANN □		1nF	50	±10%	0.75
12	CL21B122KBANN □		1.2nF	50	±10%	0.75
13	CL21B152KBANN □		1.5nF	50	±10%	0.75
14	CL21B182KBANN □		1.8nF	50	±10%	0.75
15	CL21B202KBANN □		2nF	50	±10%	0.75
16	CL21B222KBANN □		2.2nF	50	±10%	0.75
17	CL21B272KBANN □		2.7nF	50	±10%	0.75
18	CL21B332KBANN □		3.3nF	50	±10%	0.75
19	CL21B472KBANN □		4.7nF	50	±10%	0.75
20	CL21B562KBANN □		5.6nF	50	±10%	0.75
21	CL21B682KBANN □		6.8nF	50	±10%	0.75

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p74.

Product Lineup (Standard & High Capacitors-X7R)

	Part Number	Size L x W (mm)	Capacitance	Rated Voltage (Vdc)	Capacitance Tolerance	Thickness Max.(mm)
22	CL21B103KBANNNN □	2.00×1.25	10nF	50	±10%	0.75
23	CL21B123KBANNNN □		12nF	50	±10%	0.75
24	CL21B153KBANNNN □		15nF	50	±10%	0.75
25	CL21B333KBANNNN □		33nF	50	±10%	0.75
26	CL21B393KBANNNN □		39nF	50	±10%	0.75
27	CL21B473KBANNNN □		47nF	50	±10%	0.75
28	CL21B563KBCNNNN □		56nF	50	±10%	0.95
29	CL21B683KAANNNN □		68nF	25	±10%	0.75
30	CL21B683JBCNNNN □		68nF	50	±5%	0.95
31	CL21B683KBFNNNN □		68nF	50	±10%	1.35
32	CL21B823KBCNNNN □		82nF	50	±10%	0.95
33	CL21B823KBFNNNN □		82nF	50	±10%	1.35
34	CL21B104KACNNNN □		100nF	25	±10%	0.95
35	CL21B104KBCNNNN □		100nF	50	±10%	0.95
36	CL21B104KBFNNNN □		100nF	50	±10%	1.35
37	CL21B124KBFNNNN □		120nF	50	±10%	1.35
38	CL21B124KACNNNN □		120nF	25	±10%	0.95
39	CL21B154KOANNNN □		150nF	16	±10%	0.75
40	CL21B154KBFNNNN □		150nF	50	±10%	1.35
41	CL21B224KBFNNNN □		220nF	50	±10%	1.35
42	CL21B334KAFNNNN □		330nF	25	±10%	1.35
43	CL21B474KAFNNNN □		470nF	25	±10%	1.35
44	CL21B684KOFNNNN □		680nF	16	±10%	1.35
45	CL21B105KBFNNNN □	3.20×1.60	1μF	50	±10%	1.35
46	CL21B155KAFNNNN □		1.5μF	25	±10%	1.35
47	CL21B225KAFNNNN □		2.2μF	25	±10%	1.35
48	CL21B475KQQNNNN □		4.7μF	6.3	±10%	1.40
49	CL21B475KAFNNNN □		4.7μF	25	±10%	1.35
50	CL21B106KOQNNNN □		10μF	16	±10%	1.40
1	CL31B221KBCNNNN □		220pF	50	±10%	1.00
2	CL31B331KBCNNNN □		330pF	50	±10%	1.00
3	CL31B471KBCNNNN □		470pF	50	±10%	1.00
4	CL31B561KBCNNNN □		560pF	50	±10%	1.00
5	CL31B152KBCNNNN □		1.5nF	50	±10%	1.00
6	CL31B222KBCNNNN □		2.2nF	50	±10%	1.00
7	CL31B332KBCNNNN □		3.3nF	50	±10%	1.00
8	CL31B472KBCNNNN □		4.7nF	50	±10%	1.00
9	CL31B473KBCNNNN □		47nF	50	±10%	1.00
10	CL31B562KBCNNNN □		5.6nF	50	±10%	1.00
11	CL31B682KBCNNNN □		6.8nF	50	±10%	1.00
12	CL31B822KBCNNNN □		8.2nF	50	±10%	1.00
13	CL31B103KBCNNNN □		10nF	50	±10%	1.00
14	CL31B123KBCNNNN □		12nF	50	±10%	1.00
15	CL31B153KBCNNNN □		15nF	50	±10%	1.00
16	CL31B223KBCNNNN □		22nF	50	±10%	1.00
17	CL31B333KBCNNNN □		33nF	50	±10%	1.00
18	CL31B683KBCNNNN □		68nF	50	±10%	1.00
19	CL31B104KBCNNNN □		100nF	50	±10%	1.00
20	CL31B154KBCNNNN □		150nF	50	±10%	1.00
21	CL31B224KBFNNNN □		220nF	50	±10%	1.40
22	CL31B334KBFNNNN □		330nF	50	±10%	1.40

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p74.

Part Numbering System

Standard & High Capacitors

Super Small Size Capacitors

High-Q Capacitors

Medium-High Voltage Capacitors

Array Type Capacitors

Low ESL Capacitors

Reliability Test Condition

Premium Capacitors for Automotive Applications

Packaging Specification

Application Manual for Surface Mounting



Product Lineup (Standard & High Capacitors-X7R)

	Part Number	Size L x W (mm)	Capacitance	Rated Voltage (Vdc)	Capacitance Tolerance	Thickness Max.(mm)
23	CL31B334KACNNN □	3.20×1.60	330nF	25	±10%	1.00
24	CL31B474KBHNNN □		470nF	50	±10%	1.80
25	CL31B474MAFNNN □		470nF	25	±20%	1.40
26	CL31B684KOCNNN □		680nF	16	±10%	1.00
27	CL31B684KBHNNN □		680nF	50	±10%	1.80
28	CL31B105KBHNNN □		1µF	50	±10%	1.80
29	CL31B225KAHNNN □		2.2µF	25	±10%	1.80
30	CL31B335KAHNNN □		3.3µF	25	±10%	1.80
31	CL31B475KBHNNN □		4.7µF	50	±10%	1.80
32	CL31B106KBHNNN □		10µF	50	±10%	1.80
33	CL31B226KPHNNN □		22µF	10	±10%	1.80
1	CL32B104KBFNNN □	3.20×2.50	100nF	50	±10%	1.45
2	CL32B154KBFNNN □		150nF	50	±10%	1.45
3	CL32B224KBFNNN □		220nF	50	±10%	1.45
4	CL32B334KBFNNN □		330nF	50	±10%	1.45
5	CL32B474KBFNNN □		470nF	50	±10%	1.45
6	CL32B105KBHNNN □		1µF	50	±10%	1.80
7	CL32B225KBJNNN □		2.2µF	50	±10%	2.70
8	CL32B225KAINNN □		2.2µF	25	±10%	2.20
9	CL32B475KBJNNN □		4.7µF	50	±10%	2.70
10	CL32B475KBUYNN □		4.7µF	50	±10%	2.00
11	CL32B475KOINNN □		4.7µF	16	±10%	2.20
12	CL32B106KLJNNN □		10µF	35	±10%	2.70
13	CL32B106KAULNN □		10µF	25	±10%	2.00
14	CL32B106KPINNN □		10µF	10	±10%	2.20
15	CL32B226KAJNNN □		22µF	25	±10%	2.70
16	CL32B476MQJNN □		47µF	6.3	±20%	2.70

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p74.

Product Lineup (Standard & High Capacitors-Y5V)

	Part Number	Size L x W (mm)	Capacitance	Rated Voltage (Vdc)	Capacitance Tolerance	Thickness Max.(mm)
1	CL05F224Z05NNN □	1.00×0.50	0.22 μ F	16	+80/-20%	0.55
2	CL05F224ZP5NNN □		0.22 μ F	10	+80/-20%	0.55
3	CL05F224ZQ5NNN □		0.22 μ F	6.3	+80/-20%	0.55
4	CL05F474ZP5NNN □		0.47 μ F	10	+80/-20%	0.55
5	CL05F474ZQ5NNN □		0.47 μ F	6.3	+80/-20%	0.55
6	CL05F105ZQ5NNN □		1 μ F	6.3	+80/-20%	0.55
1	CL10F474ZB8NNN □	1.60×0.80	0.47 μ F	50	+80/-20%	0.90
2	CL10F474ZA8NNN □		0.47 μ F	25	+80/-20%	0.90
3	CL10F474Z08NNN □		0.47 μ F	16	+80/-20%	0.90
4	CL10F474ZP8NNN □		0.47 μ F	10	+80/-20%	0.90
5	CL10F105Z08NNN □		1 μ F	16	+80/-20%	0.90
6	CL10F105ZP8NNN □		1 μ F	10	+80/-20%	0.90
7	CL10F225ZP8NNN □		2.2 μ F	10	+80/-20%	0.90
8	CL10F225ZQ8NNN □		2.2 μ F	6.3	+80/-20%	0.90
9	CL10F475ZQ8NNN □		4.7 μ F	6.3	+80/-20%	0.90
1	CL21F105ZBFNNN □	2.00×1.25	1 μ F	50	+80/-20%	1.35
2	CL21F105ZAFNNN □		1 μ F	25	+80/-20%	1.35
3	CL21F105ZOFNNN □		1 μ F	16	+80/-20%	1.35
4	CL21F225ZAFNNN □		2.2 μ F	25	+80/-20%	1.35
5	CL21F225ZOFNNN □		2.2 μ F	16	+80/-20%	1.35
6	CL21F475ZQFNNN □		4.7 μ F	6.3	+80/-20%	1.35
7	CL21F475ZOFNNN □		4.7 μ F	16	+80/-20%	1.35
8	CL21F475ZPFNNN □		4.7 μ F	10	+80/-20%	1.35
9	CL21F106ZPFNNN □		10 μ F	10	+80/-20%	1.35
10	CL21F106ZPCLNN □		10 μ F	10	+80/-20%	0.95
11	CL21F106ZQFNNN □		10 μ F	6.3	+80/-20%	1.35
12	CL21F106ZQCLNN □		10 μ F	6.3	+80/-20%	0.95
1	CL31F475ZOFNNN □	3.20×1.60	4.7 μ F	16	+80/-20%	1.40
2	CL31F475ZPFNNN □		4.7 μ F	10	+80/-20%	1.40
3	CL31F475ZQFNNN □		4.7 μ F	6.3	+80/-20%	1.40
4	CL31F106ZOHNNN □		10 μ F	16	+80/-20%	1.80
5	CL31F106ZPHNNN □		10 μ F	10	+80/-20%	1.80
6	CL31F106ZQHNNN □		10 μ F	6.3	+80/-20%	1.80
7	CL31F226ZPHNNN □		22 μ F	10	+80/-20%	1.80
8	CL31F226ZQHNNN □		22 μ F	6.3	+80/-20%	1.80
1	CL32F106ZAHNNN □	3.20×2.50	10 μ F	25	+80/-20%	1.80
2	CL32F106ZOELNN □		10 μ F	16	+80/-20%	1.20
3	CL32F226ZPJNNN □		22 μ F	10	+80/-20%	2.70
4	CL32F226ZPJLNN □		22 μ F	10	+80/-20%	2.70
5	CL32F476ZQINNN □		47 μ F	6.3	+80/-20%	2.20
6	CL32F107ZQJNNN □		100 μ F	6.3	+80/-20%	2.70

* □ mark means packaging code. If you want to learn the code or quantity in detail, please see p74.

Part Numbering System

Standard & High Capacitors

Super Small Size Capacitors

High-Q Capacitors

Medium-High Voltage Capacitors

Array Type Capacitors

Low ESL Capacitors


Reliability Test Condition

Premium Capacitors for Automotive Applications

Packaging Specification

Application Manual for Surface Mounting

Super Small Size Capacitors

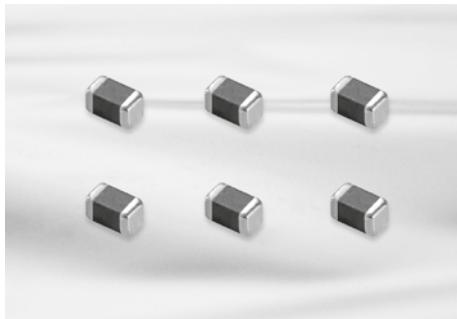


Feature

- Small chip size
- 02 and 03 series (High-Q) MLCC shows very low ESR value.
- 02 and 03 Series are suited to only reflow soldering
- 02 and 03 Series are suited to miniature RF module, portable equipment and high frequency circuit

Application

- VCO, Tuner, RF Module
- MCM Module
- Mobile phone, Wireless LAN, Note PC

Structure and Dimensions

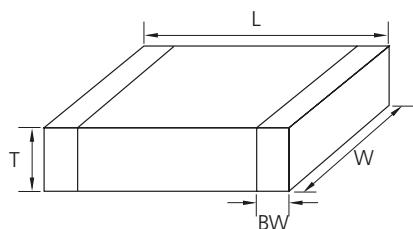

Code	EIA Code	Dimension (mm)			
		L	W	T	BW
02	01005	0.4±0.02	0.2±0.02	0.2±0.02	0.10±0.03
03	0201	0.6±0.03	0.3±0.03	0.3±0.03	0.15±0.05

Super Small Size Capacitance Table (C0G)

TC	Size (mm)	Vr(V)	Capacitance (pF)							
			0.5	1	10	22	47	100	220	330
C0G	01005(0402)	6.3								
		16								
	0201(0603)	25								
		50								

Super Small Size Capacitance Table (High-Q)

TC	Size (mm)	Vr(V)	Capacitance (pF)							
			0.2	1	10	15	27	33	47	100
C0G	01005(0402)	25								
		25								
	0201(0603)	50								

Super Small Size Capacitance Table (X7R,X6S)

TC	Size (mm)	Vr(V)	Capacitance (nF)							
			0.1	0.22	0.47	1	2.2	3.3	4.7	10
X7R	0201(0603)	10								
		10								
		16								
		25								
		50								
X6S	0201(0603)	4								

Super Small Size Capacitance Table (X5R, Y5V)

TC	Size (mm)	Vr(V)	Capacitance (μ F)							
			0.01	0.1	0.22	0.47	1	2.2	4.7	10
X5R	01005(0402)	6.3								
		10								
		16								
	0201(0603)	4		X5R or X6S						
		6.3								
	0201(0603)	10								
		16								
		25								
Y5V	0201(0603)	6.3								

Part Numbering System

Standard & High Capacitors

Super Small Size Capacitors

High-Q Capacitors

Medium-High Voltage Capacitors

Array Type Capacitors

Low ESL Capacitors

Reliability Test Condition

Premium Capacitors for Automotive Applications

Packaging Specification

Application Manual for Surface Mounting



Product Lineup (Super Small Size Capacitors-C0G)

	Part Number	Size L x W (mm)	Capacitance	Rated Voltage (Vdc)	Capacitance Tolerance	Thickness Max.(mm)	
1	CL02C0R5CO2ANN □	0.40×0.20	0.5 pF	16	±0.25 pF	0.22	
2	CL02C010CO2ANN □		1.0 pF	16	±0.25 pF	0.22	
3	CL02C1R2CO2ANN □		1.2 pF	16	±0.25 pF	0.22	
4	CL02C1R5CO2ANN □		1.5 pF	16	±0.25 pF	0.22	
5	CL02C1R8CO2ANN □		1.8 pF	16	±0.25 pF	0.22	
6	CL02C20CO2ANN □		2.0 pF	16	±0.25 pF	0.22	
7	CL02C2R2CO2ANN □		2.2 pF	16	±0.25 pF	0.22	
8	CL02C2R7CO2ANN □		2.7 pF	16	±0.25 pF	0.22	
9	CL02C30CO2ANN □		3.0 pF	16	±0.25 pF	0.22	
10	CL02C3R3CO2ANN □		3.3 pF	16	±0.25 pF	0.22	
11	CL02C3R9CO2ANN □		3.9 pF	16	±0.25 pF	0.22	
12	CL02C4R7CO2ANN □		4.7 pF	16	±0.25 pF	0.22	
13	CL02C5R6DO2ANN □		5.6 pF	16	±0.5 pF	0.22	
14	CL02C6R8DO2ANN □		6.8 pF	16	±0.5 pF	0.22	
15	CL02C8R2DO2ANN □		8.2 pF	16	±0.5 pF	0.22	
16	CL02C090DO2ANN □		9.0 pF	16	±0.5 pF	0.22	
17	CL02C100J02ANN □		10 pF	16	±5%	0.22	
18	CL02C150J02ANN □		15 pF	16	±5%	0.22	
19	CL02C180J02ANN □		18 pF	16	±5%	0.22	
20	CL02C220J02ANN □		22 pF	16	±5%	0.22	
21	CL02C270J02ANN □		27 pF	16	±5%	0.22	
22	CL02C330J02ANN □		33 pF	16	±5%	0.22	
23	CL02C390J02ANN □		39 pF	16	±5%	0.22	
24	CL02C470J02ANN □		47 pF	16	±5%	0.22	
25	CL02C560JQ2ANN □		56 pF	6.3	±5%	0.22	
26	CL02C680JQ2ANN □		68 pF	6.3	±5%	0.22	
27	CL02C820JQ2ANN □		82 pF	6.3	±5%	0.22	
28	CL02C101J02ANN □		100 pF	16	±5%	0.22	
29	CL02C101JQ2ANN □		100 pF	6.3	±5%	0.22	
1	CL02C0R5BO2GNN □	0.40×0.20	0.5 pF	16	±0.25 pF	0.22	High-Q
2	CL02C010BO2GNN □		1.0 pF	16	±0.25 pF	0.22	High-Q
3	CL02C1R2BO2GNN □		1.2 pF	16	±0.25 pF	0.22	High-Q
4	CL02C1R5BO2GNN □		1.5 pF	16	±0.25 pF	0.22	High-Q
5	CL02C1R8BO2GNN □		1.8 pF	16	±0.25 pF	0.22	High-Q
6	CL02C2R2BO2GNN □		2.2 pF	16	±0.25 pF	0.22	High-Q
7	CL02C2R7BO2GNN □		2.7 pF	16	±0.25 pF	0.22	High-Q
8	CL02C3R3BO2GNN □		3.3 pF	16	±0.25 pF	0.22	High-Q
9	CL02C3R9BO2GNN □		3.9 pF	16	±0.25 pF	0.22	High-Q
10	CL02C4R7BO2GNN □		4.7 pF	16	±0.25 pF	0.22	High-Q
11	CL02C5R6BO2GNN □		5.6 pF	16	±0.25 pF	0.22	High-Q
12	CL02C6R8BO2GNN □		6.8 pF	16	±0.25 pF	0.22	High-Q
13	CL02C8R2BO2GNN □		8.2 pF	16	±0.25 pF	0.22	High-Q
14	CL02C100JO2GNN □		10 pF	16	±5%	0.22	High-Q
15	CL02C120JO2GNN □		12 pF	16	±5%	0.22	High-Q
16	CL02C150JO2GNN □		15 pF	16	±5%	0.22	High-Q
17	CL02C180JO2GNN □		18 pF	16	±5%	0.22	High-Q
18	CL02C220JO2GNN □		22 pF	16	±5%	0.22	High-Q
19	CL02C270JO2GNN □		27 pF	16	±5%	0.22	High-Q
1	CL03C0R5CA3GNN □	0.60×0.30	0.5 pF	25	±0.25 pF	0.33	High-Q
2	CL03C010CA3GNN □		1.0 pF	25	±0.25 pF	0.33	High-Q
3	CL03C1R2CA3GNN □		1.2 pF	25	±0.25 pF	0.33	High-Q
4	CL03C1R5CA3GNN □		1.5 pF	25	±0.25 pF	0.33	High-Q

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p74.

Product Lineup (Super Small Size Capacitors-COG)

	Part Number	Size L x W (mm)	Capacitance	Rated Voltage (Vdc)	Capacitance Tolerance	Thickness Max.(mm)	
5	CL03C1R8CA3GNN □	0.60×0.30	1.8pF	25	±0.25pF	0.33	High-Q
6	CL03C020CA3GNN □		2.0pF	25	±0.25pF	0.33	High-Q
7	CL03C2R2CA3GNN □		2.2pF	25	±0.25pF	0.33	High-Q
8	CL03C2R7CA3GNN □		2.7pF	25	±0.25pF	0.33	High-Q
9	CL03C030CA3GNN □		3.0pF	25	±0.25pF	0.33	High-Q
10	CL03C3R3CA3GNN □		3.3pF	25	±0.25pF	0.33	High-Q
11	CL03C3R9CA3GNN □		3.9pF	25	±0.25pF	0.33	High-Q
12	CL03C4R7CA3GNN □		4.7pF	25	±0.25pF	0.33	High-Q
13	CL03C5R6DA3GNN □		5.6pF	25	±0.5pF	0.33	High-Q
14	CL03C6R8DA3GNN □		6.8pF	25	±0.5pF	0.33	High-Q
15	CL03C8R2DA3GNN □		8.2pF	25	±0.5pF	0.33	High-Q
16	CL03C090DA3GNN □		9.0pF	25	±0.5pF	0.33	High-Q
17	CL03C100JA3GNN □		10pF	25	±5%	0.33	High-Q
18	CL03C150JA3ANN □		15pF	25	±5%	0.33	
19	CL03C180JA3ANN □		18pF	25	±5%	0.33	
20	CL03C220JA3ANN □		22pF	25	±5%	0.33	
21	CL03C270JA3ANN □		27pF	25	±5%	0.33	
22	CL03C330JA3ANN □		33pF	25	±5%	0.33	
23	CL03C390JA3ANN □		39pF	25	±5%	0.33	
24	CL03C470JA3ANN □		47pF	25	±5%	0.33	
25	CL03C101JB3ANN □		100pF	50	±5%	0.33	
26	CL03C101JA3ANN □		100pF	25	±5%	0.33	

Part Numbering System

Standard & High Capacitors

Super Small Size Capacitors

High-Q Capacitors

Medium-High Voltage Capacitors

Array Type Capacitors

Low ESL Capacitors

Reliability Test Condition

Premium Capacitors for Automotive Applications

Packaging Specification

Application Manual for Surface Mounting

Product Lineup (Super Small Size Capacitors-X7R,X6S)

	Part Number	Size L x W (mm)	Capacitance	Rated Voltage (Vdc)	Capacitance Tolerance	Thickness Max.(mm)	
1	CL02B101KP2NNN □	0.40×0.20	100pF	10	±10%	0.22	
2	CL02B221KP2NNN □		220pF	10	±10%	0.22	
3	CL02B271KP2NNN □		270pF	10	±10%	0.22	
4	CL02B331KP2NNN □		330pF	10	±10%	0.22	
5	CL02B391KP2NNN □		390pF	10	±10%	0.22	
6	CL02B471KP2NNN □		470pF	10	±10%	0.22	
7	CL02B681KP2NNN □		680pF	10	±10%	0.22	
8	CL02B102KP2NNN □		1nF	10	±10%	0.22	
1	CL03B151KA3NNNN □	0.60×0.30	150pF	25	±10%	0.33	
2	CL03B221KA3NNNN □		220pF	25	±10%	0.33	
3	CL03B271KO3NNNN □		270pF	16	±10%	0.33	
4	CL03B331KA3NNNN □		330pF	25	±10%	0.33	
5	CL03B471KA3NNNN □		470pF	25	±10%	0.33	
6	CL03B561KO3NNNN □		560pF	16	±10%	0.33	
7	CL03B681KA3NNNN □		680pF	25	±10%	0.33	
8	CL03B821KO3NNNN □		820pF	16	±10%	0.33	
9	CL03B102KA3NNNN □		1nF	25	±10%	0.33	
10	CL03B152KP3NNNN □		1.5nF	10	±10%	0.33	
11	CL03B332KP3NNNN □		3.3nF	10	±10%	0.33	
12	CL03B392KP3NNNN □		3.9nF	10	±10%	0.33	
13	CL03B472KP3NNNN □		4.7nF	10	±10%	0.33	
14	CL03B682KP3NNNN □		6.8nF	10	±10%	0.33	
15	CL03B103KP3NNNN □		10nF	10	±10%	0.33	
1	CL03X104KQ3NNN □		100nF	6.3	±20%	0.33	
2	CL03X105MR3CSN □		1μF	4	±20%	0.35	
3	CL03X105MR3NRN □		1μF	4	±20%	0.39	

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p74.



Product Lineup (Super Small Size Capacitors-X5R)

	Part Number	Size L x W (mm)	Capacitance	Rated Voltage (Vdc)	Capacitance Tolerance	Thickness Max.(mm)
1	CL02A151KQ2NNN □	0.40×0.20	150 pF	6.3	±10%	0.22
2	CL02A221KQ2NNN □		220 pF	6.3	±10%	0.22
3	CL02A331KQ2NNN □		330 pF	6.3	±10%	0.22
4	CL02A471KQ2NNN □		470 pF	6.3	±10%	0.22
5	CL02A681KQ2NNN □		680 pF	6.3	±10%	0.22
6	CL02A102KQ2NNN □		1 nF	6.3	±10%	0.22
7	CL02A152KQ2NNN □		1.5 nF	6.3	±10%	0.22
8	CL02A222KQ2NNN □		2.2 nF	6.3	±10%	0.22
9	CL02A332KQ2NNN □		3.2 nF	6.3	±10%	0.22
10	CL02A472KQ2NNN □		4.7 nF	6.3	±10%	0.22
11	CL02A682KQ2NNN □		6.8 nF	6.3	±10%	0.22
12	CL02A103KQ2NNN □		10 nF	6.3	±10%	0.22
13	CL02A104KQ2NNN □		100 nF	6.3	±10%	0.22
14	CL02A224MR2NNN □		220 nF	4	±20%	0.22
15	CL02A224MQ2NNN □		220 nF	6.3	±20%	0.22
1	CL03A103KA3NNN □	0.60×0.30	10 nF	25	±10%	0.33
2	CL03A223KQ3NNN □		22 nF	6.3	±10%	0.33
3	CL03A473KQ3NNN □		47 nF	6.3	±10%	0.33
4	CL03A104MA3NNN □		100 nF	25	±20%	0.33
5	CL03A104KO3NNN □		100 nF	16	±10%	0.33
6	CL03A104KP3NNN □		100 nF	10	±10%	0.33
7	CL03A104KQ3NNN □		100 nF	6.3	±10%	0.33
8	CL03A224KQ3NNN □		220 nF	6.3	±10%	0.33
9	CL03A224KP3NNN □		220 nF	10	±10%	0.33
10	CL03A105MO3NRN □		1 nF	16	±20%	0.39
11	CL03A105MQ3CSN □		1 μF	6.3	±20%	0.35
12	CL03A105MP3NSN □		1 μF	10	±20%	0.35
13	CL03A225MR3CRN □		2.2 μF	4	±20%	0.39
14	CL03A225MQ3CRN □		2.2 μF	6.3	±20%	0.39

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p74.



Feature

- High Q and low ESR in high frequency range
- Tight tolerance available
- High efficiency and low power consumption in RF circuit
- Can be applied to power amplifier module for base-station and GHz range communications

Part Numbering System

Standard & High Capacitors

Super Small Size Capacitors

High-Q Capacitors

Medium-High Voltage Capacitors

Array Type Capacitors



Low ESL Capacitors

Reliability Test Condition

Premium Capacitors for Automotive Applications

Packaging Specification

Application Manual for Surface Mounting

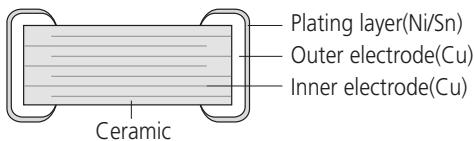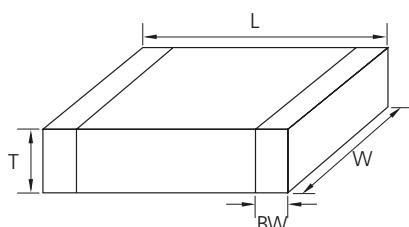


Code	EIA Code	Rated Voltage	Dimension (mm)			
			L	W	T	BW
05	0402	50V	1.00±0.05	0.50±0.05	0.50±0.05	0.25±0.10
10	0603	50/100V	1.60±0.10	0.80±0.10	0.80±0.10	0.30±0.20
		250V	1.60±0.15	0.80±0.15	0.65±0.10	0.30±0.20
21	0805	250V	2.00±0.15	1.25±0.15	0.85±0.15	0.50+0.20/-0.30

Capacitance Table (High-Q capacitor)

TC	Size (mm)	Vr(V)	Capacitance (pF)									
			0.2	0.5	1	10	15	27	33	47	68	100
COG	0402(1005)	50										
	0603(1608)	50										
		100										
		250										
	0805(2012)	250										

Medium-High Voltage Capacitors

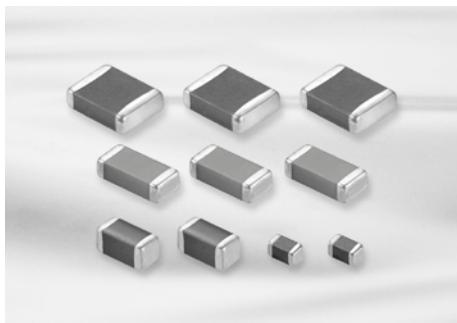


Feature

- Highly reliable performance
- Operating at high voltage level
- Wide voltage level: from 100V to 3000V
- High withstand voltage
- Tape & reel surface mount assembly

Application

- Switching Power Circuit(SMPS)
- Lighting Ballast, LCD back lighting inverter
- DC-DC converter input filter, snubber circuit
- Phone, Fax, Modem
- Network(IEEE802.3)

Structure and Dimensions

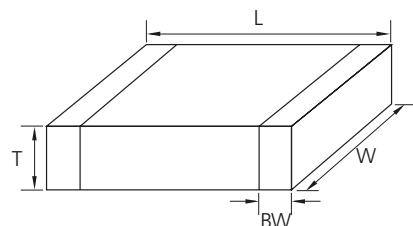

Code	EIA Code	Dimension (mm)				
		L	W	T	Thickness Code	BW
10	0603	1.60±0.10	0.80±0.10	0.80±0.10	8	0.3±0.2
21	0805	2.00±0.10	1.25±0.10	1.25±0.10	F	0.5+0.2/-0.3
		2.00±0.10	1.25±0.10	0.85±0.10	C	
		2.00±0.10	1.25±0.10	0.65±0.10	A	
		3.20±0.20	1.60±0.20	1.60±0.20	H	
31	1206	3.20±0.15	1.60±0.15	1.25±0.15	F	0.5±0.3
		3.20±0.15	1.60±0.15	0.85±0.15	C	
		3.20±0.30	2.50±0.20	2.50±0.20	J	
32	1210	3.20±0.30	2.50±0.20	1.60±0.20	H	0.6±0.3
		3.20±0.30	2.50±0.20	1.25±0.20	F	
		4.50±0.40	2.00±0.20	2.00±0.20	I	
42	1808	4.50±0.40	2.00±0.20	1.60±0.20	H	0.8±0.3
		4.50±0.40	2.00±0.20	1.25±0.20	F	
		4.50±0.40	3.20±0.30	2.50±0.20	J	
43	1812	4.50±0.40	3.20±0.30	1.60±0.20	H	0.8±0.3
		4.50±0.40	3.20±0.30	1.25±0.20	F	
		5.70±0.40	5.00±0.40	2.50±0.20	J	
55	2220	5.70±0.40	5.00±0.40	1.60±0.20	H	1.0±0.3

Medium-High Voltage capacitance Table (C0G)

Vr(V)	Size(mm)	Capacitance																										
		(pF)		(nF)																								
		330	390	470	560	680	820	1	1.2	1.5	1.8	2.2	2.7	3.3	3.9	4.7	5.6	6.8	8.2	10	12	15	18	22	27	33	47	56
100V	0603(1608)																											
	0805(2012)																											
	1206(3216)																											
	1210(3225)																											
	1812(4532)																											
	2220(5750)																											
200V	0603(1608)																											
	0805(2012)																											
	1206(3216)																											
	1210(3225)																											
	1812(4532)																											
	2220(5750)																											
250V	0603(1608)																											
	0805(2012)																											
	1206(3216)																											
	1210(3225)																											
	1812(4532)																											
	2220(5750)																											
500V	1206(3216)																											
	1210(3225)																											
	1812(4532)																											
	2220(5750)																											
630V	0805(2012)																											
	1206(3216)																											
	1210(3225)																											
	1812(4532)																											
	2220(5750)																											

Part Numbering System

Standard & High Capacitors

Super Small Size Capacitors

High-Q Capacitors

Medium-High Voltage Capacitors

Array Type Capacitors

Low ESL Capacitors

Reliability Test Condition

Premium Capacitors for Automotive Applications

Packaging Specification

Application Manual for Surface Mounting



**SAMSUNG
ELECTRO-MECHANICS**

Medium-High Voltage capacitance Table (C0G)

Medium-High Voltage capacitance Table (X7R)

Vr(V)	Size(mm)	Capacitance (nF)															
		4.7	10	15	22	33	47	68	100	150	220	330	470	680	1000	1500	2200
100V	0603(1608)								100	130							
	0805(2012)										220	250					
	1206(3216)																240
	1210(3225)																240
	1812(4532)															100	
	2220(5750)												680	750	800	850	900
200V	0805(2012)				170												
	1206(3216)								130	150	170						
	1210(3225)										220	250					
	1812(4532)																750
	2220(5750)											220	250	280	300	320	350
250V	0805(2012)				170												
	1206(3216)								130	150	170						
	1210(3225)										220	250					
	1812(4532)											220	250	280	300	320	350
	2220(5750)											220	250	280	300	320	350
350V	1206(3216)		(Tmax=1.0)		(Tmax=1.25)	(Tmax=1.8)											
500V	1206(3216)																
	1210(3225)																
	1812(4532)																
	2220(5750)																
630V	1206(3216)																
	1210(3225)																
	1812(4532)																
	2220(5750)																

Part Numbering System

Standard & High Capacitors

Super Small Size Capacitors

High-Q Capacitors

Medium-High Voltage Capacitors

Array Type Capacitors

Low ESL Capacitors

Reliability Test Condition

Premium Capacitors for Automotive Applications

Packaging Specification

Application Manual for Surface Mounting



**SAMSUNG
ELECTRO-MECHANICS**

Medium-High Voltage capacitance Table (X7R)

Product Lineup (Medium-High Voltage Capacitors-C0G)

	Part Number	Size L x W (mm)	Capacitance	Rated Voltage (Vdc)	Capacitance Tolerance	Thickness Max.(mm)
1	CL10C100JC8NNN □	1.60×0.80	10 pF	100	±5%	0.90
2	CL10C150JC8NNN □		15 pF	100	±5%	0.90
3	CL10C330JC8NNN □		33 pF	100	±5%	0.90
4	CL10C390JC8NNN □		39 pF	100	±5%	0.90
5	CL10C470JC8NNN □		47 pF	100	±5%	0.90
6	CL10C560JC8NNN □		56 pF	100	±5%	0.90
7	CL10C101JC8NNN □		100 pF	100	±5%	0.90
8	CL10C121JC8NNN □		120 pF	100	±5%	0.90
9	CL10C151JC8NNN □		150 pF	100	±5%	0.90
10	CL10C331JC8NNN □		330 pF	100	±5%	0.90
11	CL10C331JD8NNN □		330 pF	200	±5%	0.90
12	CL10C331JE8NNN □		330 pF	250	±5%	0.90
13	CL10C391JD8NNN □		390 pF	200	±5%	0.90
14	CL10C391JE8NNN □		390 pF	250	±5%	0.90
15	CL10C471JC8NNN □		470 pF	100	±5%	0.90
16	CL10C471JD8NNN □		470 pF	200	±5%	0.90
17	CL10C471JE8NNN □		470 pF	250	±5%	0.90
18	CL10C561JD8NNN □		560 pF	200	±5%	0.90
19	CL10C561JE8NNN □		560 pF	250	±5%	0.90
20	CL10C681JC8NNN □		680 pF	100	±5%	0.90
21	CL10C681JD8NNN □		680 pF	200	±5%	0.90
22	CL10C681JE8NNN □		680 pF	250	±5%	0.90
23	CL10C821JC8NNN □		820 pF	100	±5%	0.90
24	CL10C102JC8NNN □		1 nF	100	±5%	0.90
25	CL10C122JC8NNN □		1.2 nF	100	±5%	0.90
1	CL21C100JCANNN □	2.00×1.25	10 pF	100	±5%	0.75
2	CL21C120JCANNN □		12 pF	100	±5%	0.75
3	CL21C150JCANNN □		15 pF	100	±5%	0.75
4	CL21C150JDCANNN □		15 pF	200	±5%	0.95
5	CL21C180JCANNN □		18 pF	100	±5%	0.75
6	CL21C180JDCANNN □		18 pF	200	±5%	0.95
7	CL21C220JCANNN □		22 pF	100	±5%	0.75
8	CL21C270JCANNN □		27 pF	100	±5%	0.75
9	CL21C270JHFNNN □		27 pF	630	±5%	1.35
10	CL21C330JCANNN □		33 pF	100	±5%	0.75
11	CL21C330JDCANNN □		33 pF	200	±5%	0.95
12	CL21C330JHFNNN □		33 pF	630	±5%	1.35
13	CL21C390JDCANNN □		39 pF	200	±5%	0.95
14	CL21C470JCANNN □		47 pF	100	±5%	0.75
15	CL21C470JDCANNN □		47 pF	200	±5%	0.95
16	CL21C470JHFNNN □		47 pF	630	±5%	1.35
17	CL21C560JCCANNN □		56 pF	100	±5%	0.95
18	CL21C560JDCANNN □		56 pF	200	±5%	0.95
19	CL21C680JCANNN □		68 pF	100	±5%	0.75
20	CL21C680JDCANNN □		68 pF	200	±5%	0.95
21	CL21C680JHFNNN □		68 pF	630	±5%	1.35
22	CL21C820JCCANNN □		82 pF	100	±5%	0.95
23	CL21C101JCANNN □		100 pF	100	±5%	0.75
24	CL21C101JDCANNN □		100 pF	200	±5%	0.95
25	CL21C101JECANNN □		100 pF	250	±5%	0.95

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p74.

Part Numbering System

Standard & High Capacitors

Super Small Size Capacitors

High-Q Capacitors

Medium-High Voltage Capacitors

Array Type Capacitors

Low ESL Capacitors

Reliability Test Condition

Premium Capacitors for Automotive Applications

Packaging Specification

Application Manual for Surface Mounting



Product Lineup (Medium-High Voltage Capacitors-C0G)

	Part Number	Size L x W (mm)	Capacitance	Rated Voltage (Vdc)	Capacitance Tolerance	Thickness Max.(mm)
26	CL21C121JDCNNN □	2.00×1.25	120pF	200	±5%	0.95
27	CL21C151JCANNN □		150pF	100	±5%	0.75
28	CL21C151JHFNNN □		150pF	630	±5%	1.35
29	CL21C221JCANNN □		220pF	100	±5%	0.75
30	CL21C221JDCNNN □		220pF	200	±5%	0.95
31	CL21C331JCANNN □		330pF	100	±5%	0.75
32	CL21C471JCCNNN □		470pF	100	±5%	0.95
33	CL21C561JCCNNN □		560pF	100	±5%	0.95
34	CL21C561JHFNNN □		560pF	630	±5%	1.35
35	CL21C681JCCNNN □		680pF	100	±5%	0.95
36	CL21C102JCFNNN □		1nF	100	±5%	1.35
37	CL21C102JDFNNN □		1nF	200	±5%	1.35
38	CL21C272JDFNNN □		2.7nF	200	±5%	1.35
39	CL21C272JEFNNN □		2.7nF	250	±5%	1.35
40	CL21C472JCFNNN □		4.7nF	100	±5%	1.35
1	CL31C150JGFNNN □	3.20×1.60	15pF	500	±5%	1.40
2	CL31C180JGFNNN □		18pF	500	±5%	1.40
3	CL31C220JGFNNN □		22pF	500	±5%	1.40
4	CL31C220JJHFN		22pF	2000	±5%	1.80
5	CL31C270JGFNNN □		27pF	500	±5%	1.40
6	CL31C330JGFNNN □		33pF	500	±5%	1.40
7	CL31C390JGFNNN □		39pF	500	±5%	1.40
8	CL31C470JGFNNN □		47pF	500	±5%	1.40
9	CL31C470JHFNNN □		47pF	630	±5%	1.40
10	CL31C470JIFNNN □		47μF	1000	±5%	1.40
11	CL31C470JJHFN		47pF	2000	±5%	1.80
12	CL31C560JGFNNN □		56pF	500	±5%	1.40
13	CL31C680JCCNNN □		68pF	100	±5%	1.00
14	CL31C680JGFNNN □		68pF	500	±5%	1.40
15	CL31C680JHFNNN □		68pF	630	±5%	1.40
16	CL31C680JIFNNN □		68pF	1000	±5%	1.40
17	CL31C820JGFNCN □		82pF	500	±5%	1.40
18	CL31C101JGFNNN □		100pF	500	±5%	1.40
19	CL31C101JHFNNN □		100pF	630	±5%	1.40
20	CL31C101JIFNNN □		100pF	1000	±5%	1.40
21	CL31C101JJHFN		100pF	2000	±5%	1.80
22	CL31C121JGFNNN □		120pF	500	±5%	1.40
23	CL31C151JGFNNN □		150pF	500	±5%	1.40
24	CL31C181JGFNNN □		180pF	500	±5%	1.40
25	CL31C221JGFNNN □		220pF	500	±5%	1.40
26	CL31C271JGFNNN □		270pF	500	±5%	1.40
27	CL31C271JCCNNN □		270pF	100	±5%	1.00
28	CL31C331JGFNNN □		330pF	500	±5%	1.40
29	CL31C331JIHFN		330pF	1000	±5%	1.80
30	CL31C391JCCNNN □		390pF	100	±5%	1.00
31	CL31C471JGFNNN □		470pF	500	±5%	1.40
32	CL31C471JHFNNN □		470pF	630	±5%	1.40
33	CL31C471JIFNNN □		470pF	1000	±5%	1.40
34	CL31C561JCCNNN □		560pF	100	±5%	1.00
35	CL31C561JGFNNN □		560pF	500	±5%	1.40
36	CL31C681JGFNNN □		680pF	500	±5%	1.80
37	CL31C821JHHFN		820pF	630	5%	1.80

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p74.

Product Lineup (Medium-High Voltage Capacitors-C0G)

	Part Number	Size L x W (mm)	Capacitance	Rated Voltage (Vdc)	Capacitance Tolerance	Thickness Max.(mm)
36	CL31C102JCCNNN □	3.20×1.60	1nF	100	±5%	1.00
37	CL31C102JGHNNN □		1nF	500	±5%	1.80
38	CL31C152JCCNNN □		1.5nF	100	±5%	1.00
39	CL31C222JCCNNN □		2.2nF	100	±5%	1.00
40	CL31C332JGHNNN □		3.3nF	500	±5%	1.80
41	CL31C332JHHNNN □		3.3nF	630	±5%	1.80
42	CL31C392JCHNNN □		3.9nF	100	±5%	1.80
43	CL31C822JDHNNN □		8.2nF	200	±5%	1.80
44	CL31C822JEHNNN □		8.2nF	250	±5%	1.80
45	CL31C183JCHNNN □		18nF	100	±5%	1.80
1	CL32C101JJFNNN □	3.20×2.50	100pF	2000	±5%	1.45
2	CL32C471JJJNNN □		470pF	2000	±5%	2.70
3	CL32C821JJJNNN □		820pF	1000	±5%	2.70
4	CL32C103JGJNNN □		10nF	500	±5%	2.70
5	CL32C103JHJNNN □		10nF	630	±5%	2.70
6	CL32C273JDJNNN □		27nF	200	±5%	2.70
7	CL32C273JEJNNN □		27nF	250	±5%	2.70
8	CL32C563JCJNNN □		56nF	100	±5%	2.70
1	CL42C100JKFNNN □	4.50×2.00	10pF	3000	±5%	1.45
2	CL42C151JKINNN □		150pF	3000	±5%	2.20
3	CL42C221JJHJNNN □		220pF	2000	±5%	1.80
1	CL43C391JKJNNN □	4.50×3.20	390pF	3000	±5%	2.70
2	CL43C102 JIHJNNN □		1nF	1000	±5%	1.80
3	CL43C122 JIIJNNN □		1.2nF	1000	±5%	2.20
4	CL43C182 JIJJNNN □		1.8nF	1000	±5%	2.70
5	CL43C182JJJNNN □		1.8nF	2000	±5%	2.70
6	CL43C223JGJNNN □		22nF	500	±5%	2.70
7	CL43C223JHJNNN □		22nF	630	±5%	2.70
8	CL43C473JDJNNN □		47nF	200	±5%	2.70
9	CL43C473JEJNNN □		47nF	250	±5%	2.70
10	CL43C563JCJNNN □		56nF	100	±5%	2.70
1	CL55C102JJJNNN □	5.70×5.00	1nF	2000	±5%	2.70
2	CL55C102JKJNNN □		1nF	3000	±5%	2.70
3	CL55C362JIJNNN □		3.6nF	1000	±5%	2.70
4	CL55C223JGJNNN □		22nF	500	±5%	2.70
5	CL55C223JHJNNN □		22nF	630	±5%	2.70
6	CL55C473JDJNNN □		47nF	200	±5%	2.70
7	CL55C473JEJNNN □		47nF	250	±5%	2.70
8	CL55C683JCJNNN □		68nF	100	±5%	2.70

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p74.

Part Numbering System

Standard & High Capacitors

Super Small Size Capacitors

High-Q Capacitors

Medium-High Voltage Capacitors

Array Type Capacitors

Low ESL Capacitors

Reliability Test Condition

Premium Capacitors for Automotive Applications

Packaging Specification

Application Manual for Surface Mounting



Product Lineup (Medium-High Voltage Capacitors-X7R)

	Part Number	Size L x W (mm)	Capacitance	Rated Voltage (Vdc)	Capacitance Tolerance	Thickness Max.(mm)
1	CL10B102KC8NNN □	1.60 x 0.80	1nF	100	±10%	0.90
2	CL10B472KC8NNN □		4.7nF	100	±10%	0.90
3	CL10B103KC8NNN □		10nF	100	±10%	0.90
4	CL10B104KC8NNN □		100nF	100	±10%	0.90
1	CL21B221KDCNNN □	2.00×1.25	220pF	200	±10%	0.95
2	CL21B221KCANNNN □		220pF	100	±10%	0.75
3	CL21B331KDCNNN □		330pF	200	±10%	0.95
4	CL21B471KCANNNN □		470pF	100	±10%	0.75
5	CL21B102KDCNNN □		1nF	200	±10%	0.95
6	CL21B102KCANNNN □		1nF	100	±10%	0.75
7	CL21B222KDCNNN □		2.2nF	200	±10%	0.95
8	CL21B222KCANNNN □		2.2nF	100	±10%	0.75
9	CL21B332KCANNNN □		3.3nF	100	±10%	0.75
10	CL21B472KDCNNN □		4.7nF	200	±10%	0.95
11	CL21B472KCANNNN □		4.7nF	100	±10%	0.75
12	CL21B682KCANNNN □		6.8nF	100	±10%	0.75
13	CL21B103KDCNNN □		10nF	200	±10%	0.95
14	CL21B103KCANNNN □		10nF	100	±10%	0.75
15	CL21B153KEFNNN □		15nF	250	±10%	1.35
16	CL21B153KDFNNN □		15nF	200	±10%	1.35
17	CL21B153KCCNNN □		15nF	100	±10%	0.95
18	CL21B223KCFNNN □		22nF	100	±10%	1.35
19	CL21B473KCFNNN □		47nF	100	±10%	1.35
20	CL21B683KCFNNN □		68nF	100	±10%	1.35
21	CL21B154KCFNNN □		150nF	100	±10%	1.35
22	CL21B224KCFNNN □		220nF	100	±10%	1.35
1	CL31B221KGFFNNN □	3.20×1.60	220pF	500	±10%	1.40
2	CL31B471KGFFNNN □		470pF	500	±10%	1.40
3	CL31B471KDCNNN □		470pF	200	±10%	1.00
4	CL31B102KJHNNN □		1nF	2000	±10%	1.80
5	CL31B102KI FNNN □		1nF	1000	±10%	1.40
6	CL31B102KGFFNNN □		1nF	500	±10%	1.40
7	CL31B102KHFNNN □		1nF	630	±10%	1.40
8	CL31B152KGFFNNN □		1.5nF	500	±10%	1.40
9	CL31B152KJHNNN □		1.5nF	2000	±10%	1.80
10	CL31B222KIFNNN □		2.2nF	1000	±10%	1.40
11	CL31B222KDCNNN □		2.2nF	200	±10%	1.00
12	CL31B222KGFFNNN □		2.2nF	500	±10%	1.40
13	CL31B222KJHNNN □		2.2nF	2000	±10%	1.80
14	CL31B332KGFFNNN □		3.3nF	500	±10%	1.40
15	CL31B332KIFNNN □		3.3nF	1000	±10%	1.40
16	CL31B472KGFFNNN □		4.7nF	500	±10%	1.40

* □ mark means packaging code. If you want to learn the code or quantity in detail, please see p74.

Product Lineup (Medium-High Voltage Capacitors-X7R)

	Part Number	Size L x W (mm)	Capacitance	Rated Voltage (Vdc)	Capacitance Tolerance	Thickness Max.(mm)
17	CL31B472KDCNNN □	3.20×1.60	4.7nF	200	±10%	1.00
18	CL31B682KGFNNN □		6.8nF	500	±10%	1.40
19	CL31B103KHFNNN □		10nF	630	±10%	1.40
20	CL31B103KGFNNN □		10nF	500	±10%	1.40
21	CL31B103KFCSSN □		10nF	350	±10%	1.00
22	CL31B153KDCNNN □		15nF	200	±10%	1.00
23	CL31B153KFCSSN □		15nF	350	±10%	1.00
24	CL31B153KCCNNN □		15nF	100	±10%	1.00
25	CL31B153KGFNNN □		15nF	500	±10%	1.40
26	CL31B153KHFNNN □		15nF	630	±10%	1.40
27	CL31B223KDCNNN □		22nF	200	±10%	1.00
28	CL31B223KCCNNN □		22nF	100	±10%	1.00
29	CL31B223KFCSSN □		22nF	350	±10%	1.00
30	CL31B223KGHN NN □		22nF	500	±10%	1.80
31	CL31B223KHHNNN □		22nF	630	±10%	1.80
32	CL31B333KDFNNN □		33nF	200	±10%	1.40
33	CL31B333KFESNN □		33nF	350	±10%	1.25
34	CL31B333KCCNNN □		33nF	100	±10%	1.00
35	CL31B333KGHN NN □		33nF	500	±10%	1.80
36	CL31B333KHHNNN □		33nF	630	±10%	1.80
37	CL31B473KDFNNN □		47nF	200	±10%	1.40
38	CL31B473KFHSNN □		47nF	350	±10%	1.80
39	CL31B473KCCNNN □		47nF	100	±10%	1.00
40	CL31B473KEHNNN □		47nF	250	±10%	1.80
41	CL31B683KEHNNN □		68nF	250	±10%	1.80
42	CL31B104KDHNNN □		100nF	200	±10%	1.80
43	CL31B104KCFNNN □		100nF	100	±10%	1.40
44	CL31B104KEHNNN □		100nF	250	±10%	1.80
45	CL31B154KCHNNN □		150nF	100	±10%	1.80
46	CL31B105KCHNNN □		1μF	100	±10%	1.80
47	CL31B155KCHNNN □		1.5μF	100	±10%	1.80
48	CL31B225KCHNNN □		2.2μF	100	±10%	1.80
1	CL32B102KJFNNN □	3.20×2.50	1nF	2000	±10%	1.45
2	CL32B472KHFNNN □		4.7nF	630	±10%	1.45
3	CL32B472KIFNNN □		4.7nF	1000	±10%	1.45
4	CL32B682KIFNNN □		6.8nF	1000	±10%	1.45
5	CL32B103KCFNNN □		10nF	100	±10%	1.45
6	CL32B153KGFNNN □		15nF	500	±10%	1.45
7	CL32B223KGFNNN □		22nF	500	±10%	1.45
8	CL32B333KHHNNN □		33nF	630	±10%	1.80
9	CL32B333KGHN NN □		33nF	500	±10%	1.80
10	CL32B473KHHNNN □		47nF	630	±10%	1.80

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p74.

Part Numbering System

Standard & High Capacitors

Super Small Size Capacitors

High-Q Capacitors

Medium-High Voltage Capacitors

Array Type Capacitors

Low ESL Capacitors

Reliability Test Condition

Premium Capacitors for Automotive Applications

Packaging Specification


Application Manual for Surface Mounting

Product Lineup (Medium-High Voltage Capacitors-X7R)

	Part Number	Size L x W (mm)	Capacitance	Rated Voltage (Vdc)	Capacitance Tolerance	Thickness Max.(mm)
11	CL32B473KDHNNN □	3.20×2.50	47nF	200	±10%	1.80
12	CL32B473KGHNNN □		47nF	500	±10%	1.80
13	CL32B683KDINNN □		68nF	200	±10%	2.20
14	CL32B104KEJNNN □		100nF	250	±10%	2.70
15	CL32B104KDINNN □		100nF	200	±10%	2.20
16	CL32B154KCFNNN □		150nF	100	±10%	1.45
17	CL32B154KDJNNN □		150nF	200	±10%	2.70
18	CL32B154KEJNNN □		150nF	250	±10%	2.70
19	CL32B224KCHNNN □		220nF	100	±10%	1.80
20	CL32B224KDJNNN □		220nF	200	±10%	2.70
21	CL32B224KEJNNN □		220nF	250	±10%	2.70
22	CL32B334KCHNNN □		330nF	100	±10%	1.80
23	CL32B474KCINNN □		470nF	100	±10%	2.20
24	CL32B105KCJNNN □		1μF	100	±10%	2.70
25	CL32B155KCHNNN □		1.5μF	100	±10%	1.80
26	CL32B225KCJNNN □		2.2μF	100	±10%	2.70
1	CL43B102KJFNNN □	4.50×3.20	1nF	2000	±10%	1.45
2	CL43B152KJFNNN □		1.5nF	2000	±10%	1.45
3	CL43B222KIFNNN □		2.2nF	1000	±10%	1.45
4	CL43B222KJFNNN □		2.2nF	2000	±10%	1.45
5	CL43B332KJFNNN □		3.3nF	2000	±10%	1.45
6	CL43B103KIFNNN □		10nF	1000	±10%	1.45
7	CL43B333KIJNNN □		33nF	1000	±10%	2.70
8	CL43B473KGFFNNN □		47nF	500	±10%	1.45
9	CL43B473KHFNNN □		47nF	630	±10%	1.45
10	CL43B104KGINNN □		100nF	500	±10%	2.20
11	CL43B104KDFNNN □		100nF	200	±10%	1.45
12	CL43B104KHINNN □		100nF	630	±10%	2.20
13	CL43B224KCFNNN □		220nF	100	±10%	1.45
14	CL43B334KCFNNN □		330nF	100	±10%	1.45
15	CL43B474KEJNNN □		470nF	250	±10%	2.70
16	CL43B474KCHNNN □		470nF	100	±10%	1.80
17	CL43B474KDJNNN □		470nF	200	±10%	2.70
18	CL43B105KCJNNN □		1μF	100	±10%	2.70
1	CL55B103KJHNNN □	5.70×5.00	10nF	2000	±10%	1.80
2	CL55B473KIINNN □		47nF	1000	±10%	2.20
3	CL55B224KGJNNN □		220nF	500	±10%	2.70
4	CL55B224KHJNNN □		220nF	630	±10%	2.70
5	CL55B105KCHNNN □		1μF	100	±10%	1.80
6	CL55B105KDJNNN □		1μF	200	±10%	2.70
7	CL55B105KEJNNN □		1μF	250	±10%	2.70
8	CL55B475KCJNNN □		4.7μF	100	±10%	2.70

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p74.

Array Type Capacitors

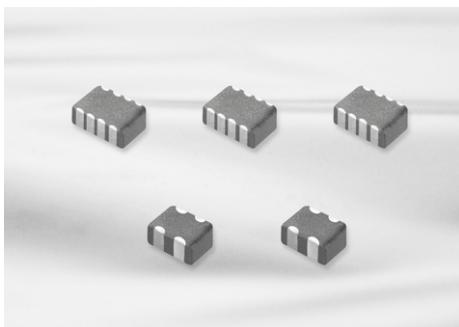

Feature

- Reduction in required space(more than 50%)
- Reduction in cost and time for replacement of PCB
- Reduction in amount of solder joints
- Easier PCB design
- Reduced waste from tape and reel packaging process
- It protect EMI bypassing digital signal line noise

Part Numbering System

Standard & High Capacitors

Super Small Size Capacitors

High-Q Capacitors

Medium-High Voltage Capacitors

Array Type Capacitors

Low ESL Capacitors

Reliability Test Condition

Premium Capacitors for Automotive Applications


Packaging Specification

Application Manual for Surface Mounting

Application

- A bypass for digital and analog signal line noise generated by telecommunication equipment and other common electronic circuits


Structure and Dimensions

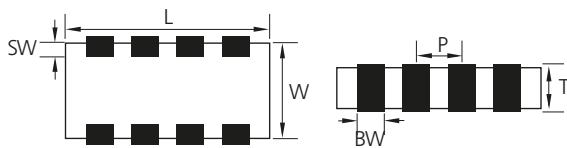


Code	Size (mm)	EIA Code	Dimension(mm)					
			L	W	T	BW	SW	P
A	0906	0302	0.90±0.05	0.60±0.05	0.45±0.05	0.25±0.05	0.15±0.1	0.45±0.05
A	1410	0504	1.37±0.15	1.0±0.15	0.35±0.05 0.50±0.05 0.60±0.06 0.80±0.08	0.36±0.1	0.2±0.1	0.64±0.1
A	2012	0805	2.0±0.15	1.25±0.15	0.85±0.1	0.5±0.2	0.25±0.15	1.0±0.1
B	2012	0805	2.0±0.15	1.25±0.15	0.85±0.1	0.25±0.1	0.25±0.15	0.5±0.1
B	3216	1206	3.2±0.15	1.6±0.15	0.85±0.15	0.4±0.2	0.3±0.15	0.8±0.2

Structure and Control Code

■ A : ARRAY(2-element)

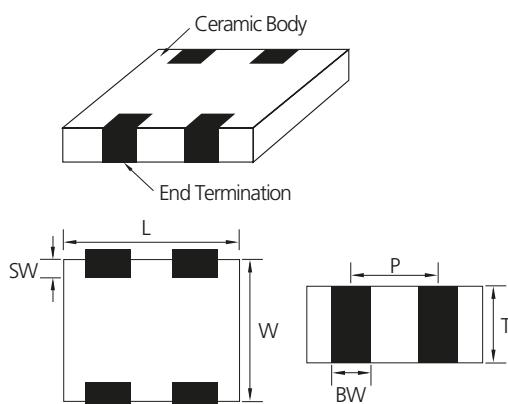

■ B : ARRAY(4-element)

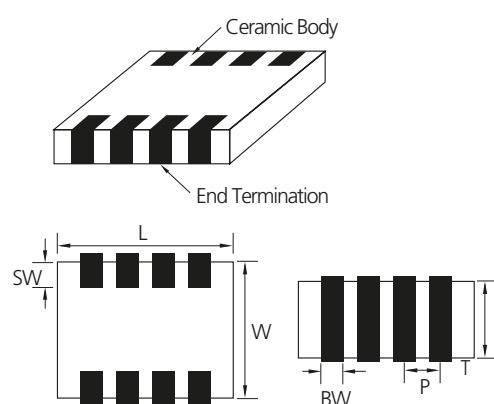



Array Type capacitance Table (C0G, X5R, X7R, Y5V)

TC	Size(mm)	Type	Vr(V)	Tmax (mm)	Capacitance(pF)					
					10	22	27	47	100	470
C0G	0504(1410)	2-element	25	0.88						
	1206(3216)	4-element	50	1.00						
X5R	0504(1410)	2-element	6.3	0.50	Capacitance(nF)					
					1	2.2	4.7	10	22	47
										100
			10	0.88						220
										470
										1000
										2200
			16	0.66						
X7R	0805(2012)	2-element	25	0.95						
			16	0.95						
Y5V	1206(3216)	4-element	10	0.95						
			16	1.00						
			25	1.00						

Product Lineup (Array Type Capacitors)

	Part Number	Element Type	Size L x W (mm)	Capacitance	Rated Voltage (Vdc)	Capacitance Tolerance	Thickness Max.(mm)
1	CL14C270KA6NAN □	2-Array	1.40×1.00	27pF	25	±10%	0.66
1	CL31C100JBCNBN □			10pF	50	±5%	1.00
2	CL31C150JBCNBN □			15pF	50	±5%	1.00
3	CL31C220JBCNBN □			22pF	50	±5%	1.00
4	CL31C270JBCNBN □			27pF	50	±5%	1.00
5	CL31C330KBCNBN □			33pF	50	±10%	1.00
6	CL31C390KBCNBN □			39pF	50	±10%	1.00
7	CL31C680JBCNBN □			68pF	50	±5%	1.00
8	CL31C820JBCNBN □			82pF	50	±5%	1.00
9	CL31C101JBCNBN □			100pF	50	±5%	1.00
10	CL31C151KBCNBN □			150pF	50	±10%	1.00
11	CL31C181JBCNBN □			180pF	50	±5%	1.00
12	CL31C331JBCNBN □			330pF	50	±5%	1.00
13	CL31C471JBCNBN □			470pF	50	±5%	1.00
1	CL21B471KBCNBN □	4-Array	3.20×1.60	470pF	50	±10%	0.95
2	CL21B104KOCNBN □			100nF	16	±10%	0.95
3	CL21B104MPCNBN □			100nF	10	±20%	0.95
1	CL31B102MBCNBN □	4-Array	3.20×1.60	1nF	50	±20%	1.00
2	CL31B103MBCNBN □			10nF	50	±20%	1.00
3	CL31B153KBCNBN □			15nF	50	±10%	1.00
4	CL31B473KACNBN □			47nF	25	±10%	1.00
5	CL31B104KACNBN □			100nF	25	±10%	1.00
6	CL31B104KOCNBN □			100nF	16	±10%	1.00
1	CL09A104KP4SAN □	2-Array	0.90×0.60	100nF	10	±10%	0.50
2	CL09A104KQ4SAN □			100nF	6.3	±10%	0.50
3	CL09A105MQ4NAN □			1μF	6.3	±20%	0.50
4	CL09A105MR4NAN □			1μF	4	±20%	0.50
1	CL14A104KA6NAN □	2-Array	1.40×1.00	100nF	25	±10%	0.66
2	CL14A104KO6NAN □			100nF	16	±10%	0.66
3	CL14A104KP6NAN □			100nF	10	±10%	0.66
4	CL14A105MA5NAN □			1μF	25	±20%	0.55
5	CL14A105KP8NAN □			1μF	10	±10%	0.88
6	CL14A105MO3NAN □			1μF	16	±20%	0.40
7	CL14A105MO8NAN □			1μF	16	±20%	0.88
8	CL14A105MO5NAN □			1μF	16	±20%	0.55
9	CL14A105MP3NAN □			1μF	10	±20%	0.40
10	CL14A105MP5NAN □			1μF	10	±20%	0.55
11	CL14A225KP8NAN □			2.2μF	10	±10%	0.88
12	CL14A225KQ8NAN □			2.2μF	6.3	±10%	0.88
1	CL21A105KOCNAN □	2-Array	2.00×1.25	1μF	16	±10%	0.95
2	CL21A105MPCNAN □			1μF	10	±20%	0.95
1	CL31F473ZBCNBN □	4-Array	3.20×1.60	47nF	50	+80/-20%	1.00
2	CL31F104ZACNBN □			100nF	25	+80/-20%	1.00

* □ mark means packaging code. If you want to learn the code or quantity in detail, please see p74.

Part Numbering System

Standard & High Capacitors

Super Small Size Capacitors

High-Q Capacitors

Medium-High Voltage Capacitors

Array Type Capacitors

Low ESL Capacitors


Reliability Test Condition

Premium Capacitors for Automotive Applications

Packaging Specification

Application Manual for Surface Mounting

Low ESL Capacitors

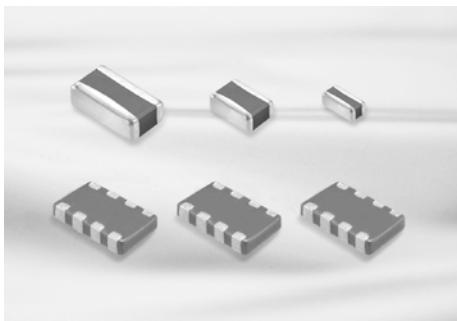


Feature

- Low ESL, good for noise reduction for high frequency
- Highly reliable tolerance and high speed automatic chip placement on PCBs
- Highly reliable performance
- Highly resistant termination metal
- Tape & reel for surface mount assembly

Application


- High Speed Microprocessor
- High Frequency Digital Equipment

LICC(Low Inductance Ceramic Capacitors)



Code	Size (mm)	EIA Code	Dimension(mm)			
			L	W	T	BW
L5	0510	0204	0.52±0.05	1.0±0.05	0.3±0.05	0.18±0.06
01	0816	0306	0.8±0.15	1.6±0.2	0.5+0.05/-0.1	0.25±0.15

SLIC(Super Low Inductance Capacitors)

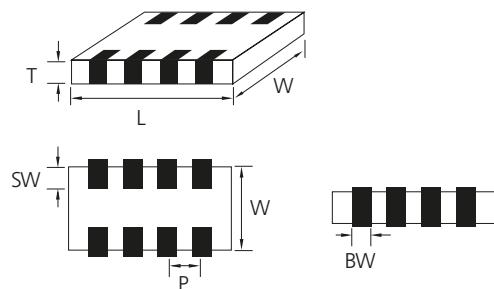

Code	Size (mm)	EIA Code	Dimension(mm)					
			L	W	T	BW	SW	P
10	1608	0603	1.6±0.1	0.8±0.1	0.5+0.05-0.1	0.25±0.1	0.15±0.1	0.4±0.1
21	2012	0805	2.0±0.1	1.25±0.1	0.5+0.05-0.1	0.25+0.15-0.1	0.2+0.15-0.1	0.5±0.1

Low ESL capacitance Table (LICC)

TC	Size(mm)	Tmax(mm)	Vr(V)	Capacitance(μF)									
				0.01	0.022	0.047	0.1	0.22	0.47	1	2.2	4.7	10
X6S /X7S /X7T	0204(0510)	0.35	2.5							X7T			
			4				X7S	X6S					
			6.3				X7S						
	0306(0816)	0.55	4							X7S			

Part Numbering System

Standard & High Capacitors

Super Small Size Capacitors

High-Q Capacitors

Medium-High Voltage Capacitors

Array Type Capacitors

Low ESL Capacitors

Reliability Test Condition

Premium Capacitors for Automotive Applications

Packaging Specification

Application Manual for Surface Mounting

Low ESL capacitance Table (SLIC)

TC	Size(mm)	Tmax(mm)	Vr(V)	Capacitance(μF)							
				0.1	0.47	0.68	1	2.2	4.7	10	22
X7R /X7S /X7T	0805(2012)	0.55	4			X7S					
			4		X7R			X7S			
			6.3		X7R						
			16		X7R						



Product Lineup (Low ESL Capacitors-X7R, X6S, X7S, X7T)

	Part Number	Size L x W (mm)	Capacitance	Rated Voltage (Vdc)	Capacitance Tolerance	Thickness Max.(mm)
1	CL21B104M05NJP □	2.00×1.25	100nF	16	± 20%	0.55
2	CL21B684M05NJP □		680nF	16	± 20%	0.55
3	CL21B684MQ5NJP □		680nF	6.3	± 20%	0.55
1	CLL5X224MR3NLN □	0.50×1.00	220nF	4	± 20%	0.35
2	CLL5X474MR3NLN □		470nF	4	± 20%	0.35
3	CLL5X105MR3NLN □		1 μ F	4	± 20%	0.35
1	CLL5Y104MQ3NLN □	0.50×1.00	100nF	6.3	± 20%	0.35
1	CL01Y105MR5NLN □	0.80×1.60	1 μ F	4	± 20%	0.55
2	CL01Y225MR5NLN □		2.2 μ F	4	± 20%	0.55
1	CL10Y474MR5NJP □	1.60×0.80	470nF	4	± 20%	0.55
2	CL10Y105MR5NJP □		1 μ F	4	± 20%	0.55
3	CL10Y225MR5NJP □		2.2 μ F	4	± 20%	0.55
1	CL21Y105MR5NJP □	2.00×1.25	1 μ F	4	± 20%	0.55
2	CL21Y225MR5NJP □		2.2 μ F	4	± 20%	0.55
1	CLL5Z105MS3NLN □	0.50×1.00	1 μ F	2.5	± 20%	0.35

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p74.

No	Item	Performance	Test Condition																																																
1	Appearance	No abnormal exterior appearance	Visual Inspection through Microscope (x10)																																																
2	Insulation Resistance	10,000MΩ min. or 500MΩ · μF min. (or *100MΩ · μF) product whichever is smaller (Rated voltage ≤ 16V: 10,000MΩ min. or 100MΩ · μF min. product whichever is smaller)	Apply the rated voltage for 60~120 sec. Rated voltage > 500V: Insulation Resistance shall be measured with 500 ± 50Vdc																																																
3	Withstanding Voltage	No dielectric breakdown or mechanical breakdown	Apply the specified voltage* for 1~5 sec. Charge / Discharge current limit: 50mA max. *CLASS I (Rated Voltage < 100V) : 300% of the rated Voltage CLASS II (Rated Voltage < 100V) : 250% of the rated Voltage In the case of $V_r \geq 100V$ products, following condition should be applied. 100V ≤ Rated Voltage < 500V : 200% of the rated Voltage 500V ≤ Rated Voltage < 1000V : 150% of the rated Voltage Rated Voltage ≥ 1000V : 120% of the rated Voltage																																																
4	Capacitance	CLASS I Within the specified tolerance CLASS II Within the specified tolerance	<table border="1"> <thead> <tr> <th>Capacitance</th> <th>Frequency</th> <th>Voltage</th> </tr> </thead> <tbody> <tr> <td>≤1,000 pF</td> <td>1MHz ± 10%</td> <td rowspan="2">0.5 ~ 5 Vrms</td> </tr> <tr> <td>>1,000 pF</td> <td>1kHz ± 10%</td> </tr> </tbody> </table> <table border="1"> <thead> <tr> <th>Capacitance</th> <th>Frequency</th> <th>Voltage</th> </tr> </thead> <tbody> <tr> <td>≤10 μF</td> <td>1kHz ± 10%</td> <td>1.0 ± 0.2 Vrms</td> </tr> <tr> <td>>10 μF</td> <td>120Hz ± 20%</td> <td>0.5 ± 0.1 Vrms</td> </tr> <tr> <td>*</td> <td>1kHz ± 10%</td> <td>0.5 ± 0.1 Vrms</td> </tr> </tbody> </table> <p>* A capacitor prior to measuring the capacitance is heat treated at 150°C +0/-10°C and maintained in ambient air for 24±2 hours.</p>	Capacitance	Frequency	Voltage	≤1,000 pF	1MHz ± 10%	0.5 ~ 5 Vrms	>1,000 pF	1kHz ± 10%	Capacitance	Frequency	Voltage	≤10 μF	1kHz ± 10%	1.0 ± 0.2 Vrms	>10 μF	120Hz ± 20%	0.5 ± 0.1 Vrms	*	1kHz ± 10%	0.5 ± 0.1 Vrms																												
Capacitance	Frequency	Voltage																																																	
≤1,000 pF	1MHz ± 10%	0.5 ~ 5 Vrms																																																	
>1,000 pF	1kHz ± 10%																																																		
Capacitance	Frequency	Voltage																																																	
≤10 μF	1kHz ± 10%	1.0 ± 0.2 Vrms																																																	
>10 μF	120Hz ± 20%	0.5 ± 0.1 Vrms																																																	
*	1kHz ± 10%	0.5 ± 0.1 Vrms																																																	
5	Tanδ	Q CLASS I CLASS II CLASS II	<table border="1"> <thead> <tr> <th>Capacitance</th> <th>Frequency</th> <th>Voltage</th> </tr> </thead> <tbody> <tr> <td>≤1,000 pF</td> <td>1MHz ± 10%</td> <td rowspan="2">0.5 ~ 5 Vrms</td> </tr> <tr> <td>>1,000 pF</td> <td>1kHz ± 10%</td> </tr> </tbody> </table> <table border="1"> <thead> <tr> <th>Capacitance</th> <th>Frequency</th> <th>Voltage</th> </tr> </thead> <tbody> <tr> <td>≤10 μF</td> <td>1kHz ± 10%</td> <td>1.0 ± 0.2 Vrms</td> </tr> <tr> <td>>10 μF</td> <td>120Hz ± 20%</td> <td>0.5 ± 0.1 Vrms</td> </tr> <tr> <td>*</td> <td>1kHz ± 10%</td> <td>0.5 ± 0.1 Vrms</td> </tr> </tbody> </table> <p>1. Characteristic : A(X5R)</p> <table border="1"> <thead> <tr> <th>Rated Voltage</th> <th>Spec</th> </tr> </thead> <tbody> <tr> <td>50V / 35V</td> <td>0.025 max / 0.05 max*</td> </tr> <tr> <td>25V</td> <td>0.025 max / 0.05 max* / 0.10 max*</td> </tr> <tr> <td>16V</td> <td>0.035 max / 0.05 max* / 0.10 max*</td> </tr> <tr> <td>≤10V</td> <td>0.05 max / 0.10 max*</td> </tr> </tbody> </table> <p>2. Characteristic : B(X7R), X(X6S), Y(X7S)</p> <table border="1"> <thead> <tr> <th>Rated Voltage</th> <th>Spec</th> </tr> </thead> <tbody> <tr> <td>50V ≥ / 35V / 25V</td> <td>0.025 max / 0.05 max* / 0.10 max*</td> </tr> <tr> <td>16V</td> <td>0.035 max / 0.10 max*</td> </tr> <tr> <td>≤10V</td> <td>0.05 max / 0.10 max*</td> </tr> </tbody> </table> <p>3. Characteristic : F(Y5V)</p> <table border="1"> <thead> <tr> <th>Rated Voltage</th> <th>Spec</th> </tr> </thead> <tbody> <tr> <td>50V / 35V / 25V</td> <td>0.05 max / 0.07 max* / 0.09 max*</td> </tr> <tr> <td>16V</td> <td>0.07 max / 0.09 max* / 0.125 max*</td> </tr> <tr> <td>10V</td> <td>0.125 max / 0.16 max*</td> </tr> <tr> <td>≤6.3V</td> <td>0.16 max</td> </tr> </tbody> </table> <p>You can check the specification at the web site or contact sales people for each product with mark*.</p>	Capacitance	Frequency	Voltage	≤1,000 pF	1MHz ± 10%	0.5 ~ 5 Vrms	>1,000 pF	1kHz ± 10%	Capacitance	Frequency	Voltage	≤10 μF	1kHz ± 10%	1.0 ± 0.2 Vrms	>10 μF	120Hz ± 20%	0.5 ± 0.1 Vrms	*	1kHz ± 10%	0.5 ± 0.1 Vrms	Rated Voltage	Spec	50V / 35V	0.025 max / 0.05 max*	25V	0.025 max / 0.05 max* / 0.10 max*	16V	0.035 max / 0.05 max* / 0.10 max*	≤10V	0.05 max / 0.10 max*	Rated Voltage	Spec	50V ≥ / 35V / 25V	0.025 max / 0.05 max* / 0.10 max*	16V	0.035 max / 0.10 max*	≤10V	0.05 max / 0.10 max*	Rated Voltage	Spec	50V / 35V / 25V	0.05 max / 0.07 max* / 0.09 max*	16V	0.07 max / 0.09 max* / 0.125 max*	10V	0.125 max / 0.16 max*	≤6.3V	0.16 max
Capacitance	Frequency	Voltage																																																	
≤1,000 pF	1MHz ± 10%	0.5 ~ 5 Vrms																																																	
>1,000 pF	1kHz ± 10%																																																		
Capacitance	Frequency	Voltage																																																	
≤10 μF	1kHz ± 10%	1.0 ± 0.2 Vrms																																																	
>10 μF	120Hz ± 20%	0.5 ± 0.1 Vrms																																																	
*	1kHz ± 10%	0.5 ± 0.1 Vrms																																																	
Rated Voltage	Spec																																																		
50V / 35V	0.025 max / 0.05 max*																																																		
25V	0.025 max / 0.05 max* / 0.10 max*																																																		
16V	0.035 max / 0.05 max* / 0.10 max*																																																		
≤10V	0.05 max / 0.10 max*																																																		
Rated Voltage	Spec																																																		
50V ≥ / 35V / 25V	0.025 max / 0.05 max* / 0.10 max*																																																		
16V	0.035 max / 0.10 max*																																																		
≤10V	0.05 max / 0.10 max*																																																		
Rated Voltage	Spec																																																		
50V / 35V / 25V	0.05 max / 0.07 max* / 0.09 max*																																																		
16V	0.07 max / 0.09 max* / 0.125 max*																																																		
10V	0.125 max / 0.16 max*																																																		
≤6.3V	0.16 max																																																		

※ The conditions of measurement may be altered upon request.

Part Numbering System

Standard & High Capacitors

Super Small Size Capacitors

High-Q Capacitors

Medium-High Voltage Capacitors

Array Type Capacitors

Low ESL Capacitors

Reliability Test Condition

Premium Capacitors for Automotive Applications

Packaging Specification

Application Manual for Surface Mounting

No	Item	Performance		Test Condition							
6	Temperature Characteristics of Capacitance	CLASS I	<table border="1"> <tr> <td>Characteristic</td><td>Temp.Coefficient(PPM/°C)</td></tr> <tr> <td>C</td><td>0±30</td></tr> </table>		Characteristic	Temp.Coefficient(PPM/°C)	C	0±30			
Characteristic	Temp.Coefficient(PPM/°C)										
C	0±30										
<table border="1"> <tr> <td>Characteristic</td><td>Capacitance Change(%) with No bias</td></tr> <tr> <td>A(X5R)/ B(X7R)</td><td>±15%</td></tr> <tr> <td>X(X6S), Y(X7S)</td><td>±22%</td></tr> <tr> <td>Z(X7T)</td><td>+22%~−33%</td></tr> <tr> <td>F(Y5V)</td><td>+22%~−82%</td></tr> </table>		Characteristic	Capacitance Change(%) with No bias	A(X5R)/ B(X7R)	±15%	X(X6S), Y(X7S)	±22%	Z(X7T)	+22%~−33%	F(Y5V)	+22%~−82%
Characteristic	Capacitance Change(%) with No bias										
A(X5R)/ B(X7R)	±15%										
X(X6S), Y(X7S)	±22%										
Z(X7T)	+22%~−33%										
F(Y5V)	+22%~−82%										
<p>(1) CLASS I Temperature Coefficient shall be calculated from the formula as below</p> $\text{Temp. Coefficient} = \frac{C_2 - C_1}{C_1 \times \Delta T} \times 10^6 [\text{ppm}/\text{C}]$ <p>C1: Capacitance at step 3 C2: Capacitance at 125°C ΔT: 100°C (=125°C − 25°C)</p>											
<p>(2) CLASS II Capacitance Change shall be calculated from the formula as below</p> $\Delta C = \frac{C_2 - C_1}{C_1} \times 100(%)$ <p>C1: Capacitance at step 3 C2: Capacitance at step 2 or 4</p>											
<p>Apply 500g.f* pressure for 10±1 sec. *200g.f for 0201 *100g.f for 01005</p>											
Appearance	No indication of peeling shall occur										
	<table border="1"> <tr> <td>Characteristic</td><td>Capacitance Change</td></tr> <tr> <td>CLASS I</td><td>±5% or ± 0.5 pF whichever is larger</td></tr> </table>		Characteristic	Capacitance Change	CLASS I	±5% or ± 0.5 pF whichever is larger					
Characteristic	Capacitance Change										
CLASS I	±5% or ± 0.5 pF whichever is larger										
Capacitance	<table border="1"> <tr> <td>CLASS II</td><td>A(X5R), B(X7R), X(X6S), Y(X7S) Z(X7T)</td><td>±12.5%</td></tr> <tr> <td></td><td>F(Y5V)</td><td>±30%</td></tr> </table>		CLASS II	A(X5R), B(X7R), X(X6S), Y(X7S) Z(X7T)	±12.5%		F(Y5V)	±30%			
CLASS II	A(X5R), B(X7R), X(X6S), Y(X7S) Z(X7T)	±12.5%									
	F(Y5V)	±30%									
<ul style="list-style-type: none"> Bending Limit: 1mm • Test Speed: 1.0mm/sec. Keep the test board at the limit point in 5 sec. Then Measure Capacitance 											
Solderability	More than 75% of the terminal surface is to be soldered newly, so metal part does not come out or dissolve										
9	Resistance to Soldering Heat	Appearance	No mechanical damage shall occur								
			<table border="1"> <tr> <td>Characteristic</td><td>Capacitance Change</td></tr> <tr> <td>CLASS I</td><td>±2.5% or ± 0.25 pF whichever is larger</td></tr> </table>		Characteristic	Capacitance Change	CLASS I	±2.5% or ± 0.25 pF whichever is larger			
Characteristic	Capacitance Change										
CLASS I	±2.5% or ± 0.25 pF whichever is larger										
Capacitance	<table border="1"> <tr> <td>CLASS II</td><td>A(X5R), B(X7R), X(X6S), Y(X7S) Z(X7T)</td><td>±7.5%</td></tr> <tr> <td></td><td>F(Y5V)</td><td>±20%</td></tr> </table>		CLASS II	A(X5R), B(X7R), X(X6S), Y(X7S) Z(X7T)	±7.5%		F(Y5V)	±20%			
CLASS II	A(X5R), B(X7R), X(X6S), Y(X7S) Z(X7T)	±7.5%									
	F(Y5V)	±20%									
<p>Solder temperature: 270±5°C DIP TIME:10 ±1 sec. Each termination shall be fully immersed and preheated as below:</p> <table border="1"> <tr> <th>Step</th><th>Temperature(°C)</th><th>Time (sec.)</th></tr> <tr> <td>1</td><td>80~100</td><td>60</td></tr> <tr> <td>2</td><td>150~180</td><td>60</td></tr> </table>		Step	Temperature(°C)	Time (sec.)	1	80~100	60	2	150~180	60	
Step	Temperature(°C)	Time (sec.)									
1	80~100	60									
2	150~180	60									
Q (CLASS I)	Within the specified initial value										
Tanδ (CLASS II)	Within the specified initial value										
Insulation resistance	Within the specified initial value										
Withstanding voltage	Within the specified initial value										
Leave the capacitor in ambient condition for specified time* before measurement *24 ± 2 hours(CLASS I) 24 ± 2 hours(CLASSII)											

No	Item	Performance			Test Condition	
11	Vibration Test	Appearance			The capacitor shall be subjected to a harmonic motion having a total amplitude of 1.5mm changing frequency from 10Hz to 55Hz and back to 10Hz in about 1 min.	
		Characteristic		Capacitance Change	Repeat this for 2hours each in 3 mutually perpendicular directions.	
		CLASS I		±2.5% or ± 0.25 pF whichever is larger		
		CLASS II	A(X5R), B(X7R)	±5%		
			X(X6S), Y(X7S) Z(X7T)	±10%		
			F(Y5V)	±20%		
		Q (CLASS I)	Within the specified initial value			
		Tanδ (CLASS II)	Within the specified initial value			
		Insulation resistance	Within the specified initial value			
12	Moisture Resistance	Appearance			<p>Applied Voltage: rated voltage Temperature: 40±2°C Humidity: 90~95% RH Duration Time: 500+12/-0 Hr. Charge/Discharge Current: 50mA max.</p> <p>Perform the initial measurement according to Note1. Perform the final measurement according to Note2.</p> <p>This test is only applied to $V_r \leq 500V$ products. You can check the specification at the web site or contact sales people for each product with mark*</p>	
		Characteristic		Capacitance Change		
		CLASS I		±7.5% or ± 0.75pF whichever is larger		
		CLASS II	A(X5R), B(X7R), X(X6S), Y(X7S) Z(X7T)	±12.5%		
			F(Y5V)	±30%		
		Q (CLASS I)	Capacitance $\geq 30pF$: $Q \geq 200$ $< 30pF$: $Q \geq 100 + 10/3 \times C$ (C: Capacitance)			
		Tanδ (CLASS II)	1. Capacitance: A(X5R) 0.05 max / 0.075 max* (35V / 50V) 0.05 max / 0.075 max* / 0.125 max* (16V / 25V) 0.075 max / 0.125 max* ($\leq 10V$)			
			2. Capacitance: B(X7R), X(X6S) 0.05 max / 0.125 max* (16V / 25V / 35V / 50V \geq) 0.075 max / 0.125 max* ($\leq 10V$)			
			3. Capacitance: F(Y5V) 0.09 max (50V) 0.09 max / 0.125 max* (25V / 35V) 0.09 max / 0.125 max* / 0.16 max* (16V) 0.16 max / 0.195 max* (10V) 0.195 max (4V / 6.3V)			
13	High Temperature Resistance	Insulation resistance			<p>Temperature : max. operating temperature Duration Time: 1000+48/-0 Hr. Charge/Discharge Current: 50mA max.</p> <p>$V_r \leq 200V$: 200% of the rated Voltage $250V \leq V_r \leq 500V$: 150% of the rated Voltage $V_r = 630V$: 120% of the rated Voltage $1000V \leq V_r \leq 3000V$: 100% of the rated Voltage * : 150% or 100% of the rated Voltage</p> <p>Perform the initial measurement according to Note1 for class II Perform the final measurement according to Note2.</p> <p>You can check the specification at the web site or contact sales people for each product with mark*</p>	
		Appearance				
		Characteristic		Capacitance Change		
		CLASS I		±3% or ± 0.3 pF whichever is larger		
		CLASS II	A(X5R), B(X7R), X(X6S), Y(X7S) Z(X7T)	±12.5%		
			F(Y5V)	±30%		
		Q (CLASS I)	Capacitance $\geq 30pF$: $Q \geq 350$ $10 \leq \text{Capacitance} < 30pF$: $Q \geq 275 + 2.5 \times C$ $\text{Capacitance} < 10pF$: $Q \geq 200 + 10 \times C$ (C: Capacitance)			
		Tanδ (CLASS II)	1. Capacitance : A(X5R) 0.05 max / 0.075 max* (35V / 50V) 0.05 max / 0.075 max* / 0.125 max* (16V / 25V) 0.075 max / 0.125 max* ($\leq 10V$)			
			2. Capacitance : B(X7R), X(X6S) 0.05 max / 0.125 max* (16V / 25V / 35V / 50V \geq) 0.075 max / 0.125 max* ($\leq 10V$)			
			3. Capacitance : F(Y5V) 0.09 max (50V) 0.09 max / 0.125 max* (25V / 35V) 0.09 max / 0.125 max* / 0.16 max* (16V) 0.16 max / 0.195 max* (10V) 0.195 max (4V / 6.3V)			
		Insulation resistance	1,000MΩ min. or 50MΩ · μF min. product whichever is smaller / 25MΩ · μF or over*			

Part Numbering System

Standard & High Capacitors

Super Small Size Capacitors

High-Q Capacitors

Medium-High Voltage Capacitors

Array Type Capacitors

Low ESL Capacitors

Reliability Test Condition

Premium Capacitors for Automotive Applications

Packaging Specification

Application Manual for Surface Mounting



No	Item	Performance		Test Condition		
14	Temperature Cycle	Appearance	No mechanical damage shall occur		Capacitor shall be subjected to 5 cycles. Condition for 1 cycle:	
		Capacitance	Characteristic	Capacitance Change		
			CLASS I	$\pm 2.5\%$ or $\pm 0.25\text{pF}$ whichever is larger		
		CLASS II	A(X5R), B(X7R)	$\pm 7.5\%$		
			X(X6S), Y(X7S) Z(X7T)	$\pm 15\%$		
			F(Y5V)	$\pm 20\%$		
		Q (CLASS I)	Within the specified initial value		Leave the capacitor in ambient condition for specified time* before measurement * 24 ± 2 hours(CLASS I) 24 ± 2 hours(CLASS II)	
		Tan δ (CLASS II)	Within the specified initial value			
		Insulation resistance	Within the specified initial value			

No	Recommended Soldering Method					
15	Recommended Soldering Method By Size & Capacitance	Size inch(mm)	Temperature Characteristic	Capacitance	Condition	
					Flow	Reflow
		01005(0402)	—	—	—	○
		0201 (0603)				
		0402 (1005)				
		0603(1608)	Class I	—	○	○
			Class II	$C < 1\text{ }\mu\text{F}$	○	○
				$C \geq 1\text{ }\mu\text{F}$	—	○
		0805 (2012)	Class I	—	○	○
			Class II	$C < 4.7\text{ }\mu\text{F}$	○	○
				$C \geq 4.7\text{ }\mu\text{F}$	—	○
		1206 (3216)	Array	—	—	○
			Class I	—	○	○
			Class II	$C < 10\text{ }\mu\text{F}$	○	○
				$C \geq 10\text{ }\mu\text{F}$	—	○
			Array	—	—	○
		1210 (3225)	—	—	—	○
		1808 (4520)				○
		1812 (4532)				○
		2220 (5750)				○

Note 1. Initial Measurement For Class II

Perform the heat treatment at $150^\circ\text{C} +0/-10^\circ\text{C}$ for 1 hour. Then Leave the capacitor in ambient condition for 24 ± 2 hours before measurement. Then perform the measurement.

Note 2. Latter Measurement

1. CLASS I

Leave the capacitor in ambient condition for 24 ± 2 hours before measurement. Then perform the measurement.

2. CLASS II

Perform the heat treatment at $150^\circ\text{C} +0/-10^\circ\text{C}$ for 1 hour. Then Leave the capacitor in ambient condition for 24 ± 2 hours before measurement. Then perform the measurement.

Note 3. All Size in Reliability Test Condition Section is "inch"

Note 4. Camera Strobe Circuit Capacitors Should be Following a Special Reliability Test Condition.

Please check with our sales representatives or product engineers.



SAMSUNG
ELECTRO-MECHANICS



Premium Capacitors for Automotive Applications

Part Numbering System (Automotive Capacitors)

CL	10	B	104	K	B	8	W	P	N	C
1	2	3	4	5	6	7	8	9	10	11

1. SERIES CODE

CL = Multi layer Ceramic Capacitors

2. SIZE CODE — inch(mm)

05 = 1005(0402) 10 = 1608(0603) 21 = 2012(0805)
31 = 3216(1206) 32 = 3225(1210)

3. DIELECTRIC CODE

C = C0G (Class I) B = X7R (Class II)

4. CAPACITANCE CODE

Capacitance expressed in pF. 2 significant digits plus number of zeros.
example) 106 = $10 \times 10^6 = 10,000,000$ pF

For Values <10pF, Letter R denotes decimal point
example) 1R5 = 1.5pF

5. TOLERANCE CODE

C = ± 0.25 pF D = ± 0.5 pF F = ± 1 pF, $\pm 1\%$ * G = $\pm 2\%$
J = $\pm 5\%$ K = $\pm 10\%$ M = $\pm 20\%$

*For Values 10pF, F = ± 1 pF, Values >10pF, F = $\pm 1\%$

※ This code has only typical specifications. Please refer to individual specifications.

6. RATED VOLTAGE CODE

P = 10V O = 16V
A = 25V B = 50V C = 100V

7. THICKNESS CODE

5 = 0.50 mm 6 = 0.60 mm 8 = 0.80 mm C = 0.85 mm
P = 1.15 mm F,Q = 1.25 mm H = 1.60 mm J = 2.50 mm

※ This code has only typical specifications. Please refer to individual specifications.

8. DESIGN CODE

1 = Ni / Cu / Ni Barrier / Sn 100% / Standard
V = Ni / Cu+Soft termination / Ni Barrier / Sn 100% / Standard
W = Ni / Cu+Soft termination / Ni Barrier / Sn 100% / Open Mode

※ This code has only typical specifications. Please refer to individual specifications.

9. PRODUCT CODE

P = Automotive product meet AEC-Q-200.

※ If orders are placed without returned specification, please allow us to judge that specification is accepted by your side.

10. GRADE CODE

N = Standard

11. PACKAGING CODE

B = Bulk
P = Bulk Case
C = Cardboard Tape, 7" Reel
H = Cardboard Tape, 7" Reel(15,000ea)

O = Cardboard Tape, 10" Reel
D = Cardboard Tape, 13" Reel(10,000ea)
L = Cardboard Tape, 13" Reel(15,000ea)

E = Embossed Type, 7" Reel
G = Embossed Type, 7" Reel(3,000ea)
F = Embossed Type, 13" Reel
S = Embossed Type, 10" Reel

Class I

Symbol	EIA Code	Operation Temperature Range(°C)	Temperature Coefficient Range(ppm/°C)
C	COG	-55~+125	0±30

Class II

Symbol	EIA Code	Operation Temperature Range(°C)	Capacitance Change(△°C %)
B	X7R	-55~+125	0±15

Capacitance Tolerance

Code	Capacitance Tolerance	TC	Capacitance Step	Rated Capacitance
C	±0.25pF	COG	Under 5pF	E-12 series *
D	±0.5pF	COG	6.0 to 9.0pF	E-12 series *
J	±5%	COG	Over 10pF	E-12 series
K	±10%	X7R	Under 0.01μF	E-3 series
			Over 0.01μF	E-6 series
M	±20%	X7R	Under 0.01μF	E-3 series
			Over 0.01μF	E-6 series

* E-24 series is also available

Series	Capacitance Step									
E-3	1.0			2.2			4.7			
E-6	1.0		1.5		2.2		3.3		4.7	
E-12	1.0	1.2	1.5	1.8	2.2	2.7	3.3	3.9	4.7	5.6
E-24	1.0	1.1	1.2	1.3	2.2	2.4	2.7	3.0	4.7	5.1
	1.5	1.6	1.8	2.0	3.3	3.6	3.9	4.3	6.8	7.5
									8.2	9.1

Size	Code	Thickness(mm)		Spec(mm) *
0402(1005)	5	0.50		±0.05
0603(1608)	8	0.80		±0.10
0805(2012)	6	0.60		±0.10
	C	0.85		±0.10
	F	1.25		±0.10
	Q	1.25		±0.15
1206(3216)	C	0.85		±0.15
	P	1.15		±0.10
	H	1.60		±0.20
1210(3225)	I	2.00		±0.20
	J	2.50		±0.20

Part Numbering System

Standard & High Capacitors

Super Small Size Capacitors

High-Q Capacitors

Medium-High Voltage Capacitors

Array Type Capacitors

Low ESL Capacitors


Reliability Test Condition

Premium Capacitors for Automotive Applications

Packaging Specification

Application Manual for Surface Mounting

Premium Capacitors for Automotive Applications

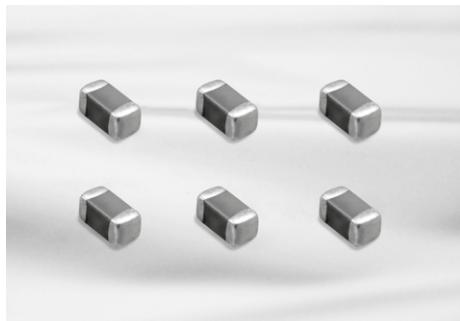


Feature

- Automotive products are manufactured in state of the art facilities recommended for registration to ISO/TS 16949:2002.
- Automotive products meet AEC-Q-200 requirements.
- Automotive products are RoHS compliant.
- Samsung terminations are suitable for all flow and reflow soldering systems. (10/21/31 size type only)
- Automotive products meet JEDEC-020-D requirements.
- C0G dielectric components contain BME and copper terminations with a Ni/Sn plated overcoat.
- X7R dielectric components have BME and soft terminations with a Ni/Sn plated overcoat.

Application

- Automotive Electronic Equipment
(Powertrain, Safety, Body & Chassis, Convenience, Infotainment)

Structure and Dimensions



Code	EIA Code	Dimension(mm)			
		L	W	T	BW
05	0402	1.00±0.05	0.50±0.05	0.50(± 0.05)	0.25±0.10
10	0603	1.60±0.10	0.80±0.10	0.80(± 0.10)	0.30±0.20
21	0805	2.00±0.10	1.25±0.10	0.60(± 0.10)	0.5+0.2/-0.3
				0.85(± 0.10)	
				1.25(± 0.10)	
		2.00±0.15	1.25±0.15	1.25(± 0.15)	
31	1206	3.20±0.20	1.60±0.20	0.85(± 0.15)	0.50±0.30
				1.15(± 0.10)	
				1.60(± 0.20)	
32	1210	3.20±0.30	2.50±0.20	2.00(± 0.20)	0.60±0.30
				2.50(± 0.20)	

Automotive Capacitors Table (C0G, X7R)

TC	Size (mm)	Thickness (mm)	Vr	Capacitance (pF)			Capacitance (nF)						
				100	220	470	1	2.2	4.7	10	22	47	100
COG	0402(1005)	0.50	50										
			100										
	0603(1608)	0.80	50										
			100		271								
	0805(2012)	0.60	50										
		0.85											
		1.25	100										
X7R	0402(1005)	0.50	10										
			16										
			25										
			50										
	0603(1608)	0.80	10										
			16										
			25										
			50										
			100										
	0805(2012)	1.25	10										
		0.85	16										
		1.25											
		0.60	25										
		0.85											
		1.25											
		0.60	50										
		0.85											
		1.25											
	1206(3216)	0.60	100										
		1.15	16										
		1.60											
		0.85	25										
		1.15											
		1.60											
		0.85	50										
		1.15											
		1.60											
	3225(1210)	2.70	16										61

Part Numbering System

Standard & High Capacitors

Super Small Size Capacitors

High-Q Capacitors

Medium-High Voltage Capacitors

Array Type Capacitors

Low ESL Capacitors

Reliability Test Condition

Premium Capacitors for Automotive Applications

Packaging Specification

Application Manual for Surface Mounting



Product Lineup (Automotive Capacitors-COG)

	Part Number	Size L x W (mm)	Capacitance	Rated Voltage (Vdc)	Capacitance Tolerance	Thickness Max.(mm)
1	CL05C4R7CB51PN □	1.00×0.50	4.7pF	50	±0.25pF	0.55
2	CL05C4R7CC51PN □		4.7pF	100	±0.25pF	0.55
3	CL05C6R8DB51PN □		6.8pF	50	±0.5pF	0.55
4	CL05C6R8DC51PN □		6.8pF	100	±0.5pF	0.55
5	CL05C100JB51PN □		10pF	50	±5%	0.55
6	CL05C100JC51PN □		10pF	100	±5%	0.55
7	CL05C120JB51PN □		12pF	50	±5%	0.55
8	CL05C120JC51PN □		12pF	100	±5%	0.55
9	CL05C150JB51PN □		15pF	50	±5%	0.55
10	CL05C150JC51PN □		15pF	100	±5%	0.55
11	CL05C180JB51PN □		18pF	50	±5%	0.55
12	CL05C180JC51PN □		18pF	100	±5%	0.55
13	CL05C220JB51PN □		22pF	50	±5%	0.55
14	CL05C220JC51PN □		22pF	100	±5%	0.55
15	CL05C270JB51PN □		27pF	50	±5%	0.55
16	CL05C270JC51PN □		27pF	100	±5%	0.55
17	CL05C330JB51PN □		33pF	50	±5%	0.55
18	CL05C330JC51PN □		33pF	100	±5%	0.55
19	CL05C390JB51PN □		39pF	50	±5%	0.55
20	CL05C390JC51PN □		39pF	100	±5%	0.55
21	CL05C470JB51PN □		47pF	50	±5%	0.55
22	CL05C470JC51PN □		47pF	100	±5%	0.55
23	CL05C560JB51PN □		56pF	50	±5%	0.55
24	CL05C560JC51PN □		56pF	100	±5%	0.55
25	CL05C680JB51PN □		68pF	50	±5%	0.55
26	CL05C680JC51PN □		68pF	100	±5%	0.55
27	CL05C820JB51PN □		82pF	50	±5%	0.55
28	CL05C820JC51PN □		82pF	100	±5%	0.55
29	CL05C101JB51PN □		100pF	50	±5%	0.55
30	CL05C101JC51PN □		100pF	100	±5%	0.55
31	CL05C121JB51PN □		120pF	50	±5%	0.55
32	CL05C151JB51PN □		150pF	50	±5%	0.55
33	CL05C221JB51PN □		220pF	50	±5%	0.55
1	CL10C4R7CB81PN □	1.60×0.80	4.7pF	50	±0.25pF	0.90
2	CL10C4R7CC81PN □		4.7pF	100	±0.25pF	0.90
3	CL10C6R8DB81PN □		6.8pF	50	±0.5pF	0.90
4	CL10C6R8DC81PN □		6.8pF	100	±0.5pF	0.90
5	CL10C100JB81PN □		10pF	50	±5%	0.90
6	CL10C100JC81PN □		10pF	100	±5%	0.90
7	CL10C120JB81PN □		12pF	50	±5%	0.90
8	CL10C120JC81PN □		12pF	100	±5%	0.90
9	CL10C150JB81PN □		15pF	50	±5%	0.90
10	CL10C150JC81PN □		15pF	100	±5%	0.90
11	CL10C180JB81PN □		18pF	50	±5%	0.90
12	CL10C180JC81PN □		18pF	100	±5%	0.90
13	CL10C220JB81PN □		22pF	50	±5%	0.90
14	CL10C220JC81PN □		22pF	100	±5%	0.90
15	CL10C270JB81PN □		27pF	50	±5%	0.90
16	CL10C270JC81PN □		27pF	100	±5%	0.90
17	CL10C330JB81PN □		33pF	50	±5%	0.90

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p74.

Product Lineup (Automotive Capacitors-COG)

	Part Number	Size L x W (mm)	Capacitance	Rated Voltage (Vdc)	Capacitance Tolerance	Thickness Max.(mm)
18	CL10C330JC81PN □	1.60×0.80	33pF	100	±5%	0.90
19	CL10C390JB81PN □		39pF	50	±5%	0.90
20	CL10C390JC81PN □		39pF	100	±5%	0.90
21	CL10C470JB81PN □		47pF	50	±5%	0.90
22	CL10C470JC81PN □		47pF	100	±5%	0.90
23	CL10C560JB81PN □		56pF	50	±5%	0.90
24	CL10C560JC81PN □		56pF	100	±5%	0.90
25	CL10C680JB81PN □		68pF	50	±5%	0.90
26	CL10C680JC81PN □		68pF	100	±5%	0.90
27	CL10C820JB81PN □		82pF	50	±5%	0.90
28	CL10C820JC81PN □		82pF	100	±5%	0.90
29	CL10C101JB81PN □		100pF	50	±5%	0.90
30	CL10C101JC81PN □		100pF	100	±5%	0.90
31	CL10C121JB81PN □		120pF	50	±5%	0.90
32	CL10C151JB81PN □		150pF	50	±5%	0.90
33	CL10C221JB81PN □		220pF	50	±5%	0.90
34	CL10C221JC81PN □		220pF	100	±5%	0.90
35	CL10C271JB81PN □		270pF	50	±5%	0.90
36	CL10C331JB81PN □		330pF	50	±5%	0.90
37	CL10C391JB81PN □		390pF	50	±5%	0.90
38	CL10C471JB81PN □		470pF	50	±5%	0.90
39	CL10C561JB81PN □		560pF	50	±5%	0.90
40	CL10C681JB81PN □		680pF	50	±5%	0.90
41	CL10C821JB81PN □		820pF	50	±5%	0.90
42	CL10C102JB81PN □		1.0nF	50	±5%	0.90
1	CL21C100JB61PN □	2.00×1.25	10pF	50	±5%	0.70
2	CL21C100JC61PN □		10pF	100	±5%	0.70
3	CL21C120JB61PN □		12pF	50	±5%	0.70
4	CL21C120JC61PN □		12pF	100	±5%	0.70
5	CL21C150JB61PN □		15pF	50	±5%	0.70
6	CL21C150JC61PN □		15pF	100	±5%	0.70
7	CL21C180JB61PN □		18pF	50	±5%	0.70
8	CL21C180JC61PN □		18pF	100	±5%	0.70
9	CL21C220JB61PN □		22pF	50	±5%	0.70
10	CL21C220JC61PN □		22pF	100	±5%	0.70
11	CL21C270JC61PN □		27pF	100	±5%	0.70
12	CL21C330JB61PN □		33pF	50	±5%	0.70
13	CL21C330JC61PN □		33pF	100	±5%	0.70
14	CL21C390JB61PN □		39pF	50	±5%	0.70
15	CL21C390JC61PN □		39pF	100	±5%	0.70
16	CL21C470JB61PN □		47pF	50	±5%	0.70
17	CL21C470JC61PN □		47pF	100	±5%	0.70
18	CL21C560JB61PN □		56pF	50	±5%	0.70
19	CL21C560JC61PN □		56pF	100	±5%	0.70
20	CL21C680JB61PN □		68pF	50	±5%	0.70
21	CL21C680JC61PN □		68pF	100	±5%	0.70
22	CL21C820JB61PN □		82pF	50	±5%	0.70
23	CL21C820JC61PN □		82pF	100	±5%	0.70
24	CL21C101JB61PN □		100pF	50	±5%	0.70
25	CL21C101JC61PN □		100pF	100	±5%	0.70

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p74.

Part Numbering System

Standard & High Capacitors

Super Small Size Capacitors

High-Q Capacitors

Medium-High Voltage Capacitors

Array Type Capacitors

Low ESL Capacitors

Reliability Test Condition

Premium Capacitors for Automotive Applications

Packaging Specification

Application Manual for Surface Mounting



Product Lineup (Automotive Capacitors-COG)

	Part Number	Size L x W (mm)	Capacitance	Rated Voltage (Vdc)	Capacitance Tolerance	Thickness Max.(mm)
26	CL21C121JB61PN □	2.00×1.25	120pF	50	±5%	0.70
27	CL21C121JC61PN □		120pF	100	±5%	0.70
28	CL21C151JB61PN □		150pF	50	±5%	0.70
29	CL21C151JC61PN □		150pF	100	±5%	0.70
30	CL21C221JB61PN □		220pF	50	±5%	0.70
31	CL21C221JC61PN □		220pF	100	±5%	0.70
32	CL21C271JB61PN □		270pF	50	±5%	0.70
33	CL21C271JC61PN □		270pF	100	±5%	0.70
34	CL21C331JB61PN □		330pF	50	±5%	0.70
35	CL21C331JC61PN □		330pF	100	±5%	0.70
36	CL21C471JBC1PN □		470pF	50	±5%	0.95
37	CL21C471JCC1PN □		470pF	100	±5%	0.95
38	CL21C561JBC1PN □		560pF	50	±5%	0.95
39	CL21C561JCC1PN □		560pF	100	±5%	0.95
40	CL21C681JBC1PN □		680pF	50	±5%	0.95
41	CL21C681JCC1PN □		680pF	100	±5%	0.95
42	CL21C821JBC1PN □		820pF	50	±5%	0.95
43	CL21C821JCC1PN □		820pF	100	±5%	0.95
44	CL21C102JBF1PN □		1.0nF	50	±5%	1.35
45	CL21C102JBC1PN □		1.0nF	50	±5%	0.95
46	CL21C102JCF1PN □		1.0nF	100	±5%	1.35
47	CL21C102JCC1PN □		1.0nF	100	±5%	0.95
48	CL21C122JBF1PN □		1.2nF	50	±5%	1.35
49	CL21C122JBC1PN □		1.2nF	50	±5%	0.95
50	CL21C152JBF1PN □		1.5nF	50	±5%	1.35
51	CL21C152JBC1PN □		1.5nF	50	±5%	0.95
52	CL21C182JBF1PN □		1.8nF	50	±5%	1.35
53	CL21C182JBC1PN □		1.8nF	50	±5%	0.95
54	CL21C222JBF1PN □		2.2nF	50	±5%	1.35
55	CL21C222JBC1PN □		2.2nF	50	±5%	0.95
56	CL21C272JBF1PN □		2.7nF	50	±5%	1.35
57	CL21C272JBC1PN □		2.7nF	50	±5%	0.95
58	CL21C332JBF1PN □		3.3nF	50	±5%	1.35
59	CL21C332JBC1PN □		3.3nF	50	±5%	0.95
60	CL21C392JBF1PN □		3.9nF	50	±5%	1.35
61	CL21C392JBC1PN □		3.9nF	50	±5%	0.95
62	CL21C472JBF1PN □		4.7nF	50	±5%	1.35
63	CL21C472JBC1PN □		4.7nF	50	±5%	0.95
64	CL21C562JBF1PN □		5.6nF	50	±5%	1.35
65	CL21C562JBC1PN □		5.6nF	50	±5%	0.95
66	CL21C682JBF1PN □		6.8nF	50	±5%	1.35
67	CL21C822JBF1PN □		8.2nF	50	±5%	1.35
68	CL21C103JBF1PN □		10nF	50	±5%	1.35

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p74.

Product Lineup (Automotive Capacitors-X7R)

	Part Number	Size L x W (mm)	Capacitance	Rated Voltage (Vdc)	Capacitance Tolerance	Thickness Max.(mm)
1	CL05B331KB5VPN □	1.00×0.50	330 pF	50	±10%	0.55
2	CL05B471KB5VPN □		470 pF	50	±10%	0.55
3	CL05B681KB5VPN □		680 pF	50	±10%	0.55
4	CL05B102KA5VPN □		1.0 nF	25	±10%	0.55
5	CL05B102KB5VPN □		1.0 nF	50	±10%	0.55
6	CL05B152KA5VPN □		1.5 nF	25	±10%	0.55
7	CL05B152KB5VPN □		1.5 nF	50	±10%	0.55
8	CL05B222KA5VPN □		2.2 nF	25	±10%	0.55
9	CL05B222KB5VPN □		2.2 nF	50	±10%	0.55
10	CL05B332KA5VPN □		3.3 nF	25	±10%	0.55
11	CL05B332KB5VPN □		3.3 nF	50	±10%	0.55
12	CL05B472KA5VPN □		4.7 nF	25	±10%	0.55
13	CL05B472KB5VPN □		4.7 nF	50	±10%	0.55
14	CL05B682KA5VPN □		6.8 nF	25	±10%	0.55
15	CL05B682KB5VPN □		6.8 nF	50	±10%	0.55
16	CL05B103KA5VPN □		10 nF	25	±10%	0.55
17	CL05B103KB5VPN □		10 nF	50	±10%	0.55
18	CL05B153KA5VPN □		15 nF	25	±10%	0.55
19	CL05B153KB5VPN □		15 nF	50	±10%	0.55
20	CL05B223KA5VPN □		22 nF	25	±10%	0.55
21	CL05B223KB5VPN □		22 nF	50	±10%	0.55
22	CL05B333KO5VPN □		33 nF	16	±10%	0.55
23	CL05B473KO5VPN □		47 nF	16	±10%	0.55
24	CL05B683KO5VPN □		68 nF	16	±10%	0.55
25	CL05B104KO5VPN □		100 nF	16	±10%	0.55

* □ mark means packaging code. If you want to learn the code or quantity in detail, please see p74.

Part Numbering System

Standard & High Capacitors

Super Small Size Capacitors

High-Q Capacitors

Medium-High Voltage Capacitors

Array Type Capacitors

Low ESL Capacitors

Reliability Test Condition

Premium Capacitors for Automotive Applications

Packaging Specification

Application Manual for Surface Mounting



Product Lineup (Automotive Capacitors-X7R)

	Part Number	Size L x W (mm)	Capacitance	Rated Voltage (Vdc)	Capacitance Tolerance	Thickness Max.(mm)
1	CL10B221KC8WPN □	1.60×0.80	220pF	100	±10%	0.90
2	CL10B331KC8WPN □		330pF	100	±10%	0.90
3	CL10B471KC8WPN □		470pF	100	±10%	0.90
4	CL10B681KC8WPN □		680pF	100	±10%	0.90
5	CL10B102KB8WPN □		1.0nF	50	±10%	0.90
6	CL10B102KC8WPN □		1.0nF	100	±10%	0.90
7	CL10B152KB8WPN □		1.5nF	50	±10%	0.90
8	CL10B152KC8WPN □		1.5nF	100	±10%	0.90
9	CL10B222KB8WPN □		2.2nF	50	±10%	0.90
10	CL10B222KC8WPN □		2.2nF	100	±10%	0.90
11	CL10B332KB8WPN □		3.3nF	50	±10%	0.90
12	CL10B332KC8WPN □		3.3nF	100	±10%	0.90
13	CL10B472KB8WPN □		4.7nF	50	±10%	0.90
14	CL10B472KC8WPN □		4.7nF	100	±10%	0.90
15	CL10B682KB8WPN □		6.8nF	50	±10%	0.90
16	CL10B682KC8WPN □		6.8nF	100	±10%	0.90
17	CL10B103KB8WPN □		10nF	50	±10%	0.90
18	CL10B103KC8WPN □		10nF	100	±10%	0.90
19	CL10B153KB8WPN □		15nF	50	±10%	0.90
20	CL10B223KB8WPN □		22nF	50	±10%	0.90
21	CL10B333KA8WPN □		33nF	25	±10%	0.90
22	CL10B333KB8WPN □		33nF	50	±10%	0.90
23	CL10B473KA8WPN □		47nF	25	±10%	0.90
24	CL10B473KB8WPN □		47nF	50	±10%	0.90
25	CL10B683KA8WPN □		68nF	25	±10%	0.90
26	CL10B683KB8WPN □		68nF	50	±10%	0.90
27	CL10B104KA8WPN □		100nF	25	±10%	0.90
28	CL10B104KB8WPN □		100nF	50	±10%	0.90
29	CL10B154KO8VPN □		150nF	16	±10%	0.90
30	CL10B154KA8VPN □		150nF	25	±10%	0.90
31	CL10B224KO8VPN □		220nF	16	±10%	0.90
32	CL10B224KA8VPN □		220nF	25	±10%	0.90
33	CL10B334KO8VPN □		330nF	16	±10%	0.90
34	CL10B334KA8VPN □		330nF	25	±10%	0.90
35	CL10B474KO8VPN □		470nF	16	±10%	0.90
36	CL10B474KA8VPN □		470nF	25	±10%	0.90
37	CL10B684KO8VPN □		680nF	16	±10%	0.90
38	CL10B105KO8VPN □		1.0μF	16	±10%	0.90

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p74.

Product Lineup (Automotive Capacitors-X7R)

	Part Number	Size L x W (mm)	Capacitance	Rated Voltage (Vdc)	Capacitance Tolerance	Thickness Max.(mm)
1	CL21B102KC6WPN □	2.00×1.25	1.0 nF	100	±10%	0.70
2	CL21B152KC6WPN □		1.5 nF	100	±10%	0.70
3	CL21B222KC6WPN □		2.2 nF	100	±10%	0.70
4	CL21B332KC6WPN □		3.3 nF	100	±10%	0.70
5	CL21B472KC6WPN □		4.7 nF	100	±10%	0.70
6	CL21B682KC6WPN □		6.8 nF	100	±10%	0.70
7	CL21B103KC6WPN □		10 nF	100	±10%	0.70
8	CL21B153KC6WPN □		15 nF	100	±10%	0.70
9	CL21B223KC6WPN □		22 nF	100	±10%	0.70
10	CL21B333KCCWPN □		33 nF	100	±10%	0.95
11	CL21B473KCCWPN □		47 nF	100	±10%	0.95
12	CL21B683KCCWPN □		68 nF	100	±10%	0.95
13	CL21B104KBFWPN □		100 nF	50	±10%	1.35
14	CL21B104KBCWPN □		100 nF	50	±10%	0.95
15	CL21B104KCFWPN □		100 nF	100	±10%	1.35
16	CL21B104KCCWPN □		100 nF	100	±10%	0.95
17	CL21B154KAFVPN □		150 nF	25	±10%	1.35
18	CL21B154KBFVPN □		150 nF	50	±10%	1.35
19	CL21B224KAFVPN □		220 nF	25	±10%	1.35
20	CL21B224KBFVPN □		220 nF	50	±10%	1.35
21	CL21B334KAFVPN □		330 nF	25	±10%	1.35
22	CL21B334KBFVPN □		330 nF	50	±10%	1.35
23	CL21B474KOFVPN □		470 nF	16	±10%	1.35
24	CL21B474KAFVPN □		470 nF	25	±10%	1.35
25	CL21B474KBFVPN □		470 nF	50	±10%	1.35
26	CL21B684KOFVPN □		680 nF	16	±10%	1.35
27	CL21B684KAFVPN □		680 nF	25	±10%	1.35
28	CL21B105KOFVPN □		1.0 μF	16	±10%	1.35
29	CL21B105KAFVPN □		1.0 μF	25	±10%	1.35
30	CL21B225KPFVPN □	3.20×1.60	2.2 μF	10	±10%	1.35
31	CL21B225KOFVPN □		2.2 μF	16	±10%	1.35
32	CL21B335KPQVPN □		3.3 μF	10	±10%	1.40
33	CL21B475KPQVPN □		4.7 μF	10	±10%	1.40
1	CL31B104KBPWPN □	3.20×1.60	100 nF	50	±10%	1.25
2	CL31B104KBCVPN □		100 nF	50	±10%	1.00
3	CL31B154KBPWPN □		150 nF	50	±10%	1.25
4	CL31B224KBPWPN □		220 nF	50	±10%	1.25
5	CL31B334KBHVPN □		330 nF	50	±10%	1.80
6	CL31B474KBHVPN □		470 nF	50	±10%	1.80
7	CL31B684KBHVPN □		680 nF	50	±10%	1.80
8	CL31B105KAPWPN □		1.0 μF	25	±10%	1.25
9	CL31B105KBHVPN □		1.0 μF	50	±10%	1.80
10	CL31B155KAHVPN □		1.5 μF	25	±10%	1.80
11	CL31B155KBHVPN □		1.5 μF	50	±10%	1.80
12	CL31B225KOHVPN □		2.2 μF	16	±10%	1.80
13	CL31B225KAHVPN □		2.2 μF	25	±10%	1.80
14	CL31B225KBHVPN □		2.2 μF	50	±10%	1.80
15	CL31B335KOHVPN □		3.3 μF	16	±10%	1.80
16	CL31B335KAHVPN □		3.3 μF	25	±10%	1.80
17	CL31B475KOHVPN □		4.7 μF	16	±10%	1.80
18	CL31B475KAHVPN □		4.7 μF	25	±10%	1.80
19	CL31B685KOHVPN □		6.8 μF	16	±10%	1.80
20	CL31B106KOHVPN □		10.0 μF	16	±10%	1.80
1	CL32B226KOJVPN □	3.20×2.50	22 μF	16	±10%	2.70

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p74.

Part Numbering System

Standard & High Capacitors

Super Small Size Capacitors

High-Q Capacitors

Medium-High Voltage Capacitors

Array Type Capacitors

Low ESL Capacitors

Reliability Test Condition

Premium Capacitors for Automotive Applications


Packaging Specification

Application Manual for Surface Mounting

Reliability Test Condition (Automotive Capacitors)

No	Item		Performance	Test Condition
1	Pre-and Post-Stress Electrical Test		—	
2	High Temperature Exposure	Appearance		No abnormal exterior appearance
		Capacitance Change	CLASS I	Within $\pm 2.5\%$ or 0.25pF, (Whichever is larger)
			CLASS II	Within $\pm 10\%$
		Q	CLASS I	Capacitance $\geq 30\text{pF}$: $Q \geq 1,000$ $< 30\text{pF}$: $Q \geq 400 + 20 \times C$ (C : Capacitance)
		Tan δ	CLASS II	Rated Voltage $\geq 25V$: 0.03 max $\geq 16V$: 0.05 max $\geq 10V$: 0.075 max *1)
		IR		More than $10,000\text{M}\Omega$ or $500\text{M}\Omega \times \mu\text{F}$ (Whichever is smaller) *1)
3	Temperature Cycling	Appearance		No abnormal exterior appearance
		Capacitance Change	CLASS I	Within $\pm 2.5\%$ or 0.25pF, (Whichever is larger)
			CLASS II	Within $\pm 10\%$
		Q	CLASS I	Capacitance $\geq 30\text{pF}$: $Q \geq 1,000$ $< 30\text{pF}$: $Q \geq 400 + 20 \times C$ (C : Capacitance)
		Tan δ	CLASS II	Rated Voltage $\geq 25V$: 0.03 max $\geq 16V$: 0.05 max $\geq 10V$: 0.075 max *1)
		IR		More than $10,000\text{M}\Omega$ or $500\text{M}\Omega \times \mu\text{F}$ (Whichever is smaller) *1)
4	Destructive Physical Analysis		No defects or abnormalities	Per EIA 469
5	Moisture Resistance	Appearance		No abnormal exterior appearance
		Capacitance Change	CLASS I	Within $\pm 2.5\%$ or 0.25pF, (Whichever is larger)
			CLASS II	Within $\pm 12.5\%$
		Q	CLASS I	Capacitance $\geq 30\text{pF}$: $Q \geq 350$ $10 \leq \text{Capacitance} < 30\text{pF}$: $Q \geq 275 + (5/2) \times C$ Capacitance $< 10\text{pF}$: $Q \geq 200 + 10 \times C$ (C : Capacitance)
		Tan δ	CLASS II	Rated Voltage $\geq 25V$: 0.03 max $\geq 16V$: 0.05 max $\geq 10V$: 0.075 max *1)
		IR		More than $10,000\text{M}\Omega$ or $500\text{M}\Omega \times \mu\text{F}$ (Whichever is smaller) *1)

*1) : Indicates typical specification. Please refer to individual specifications.

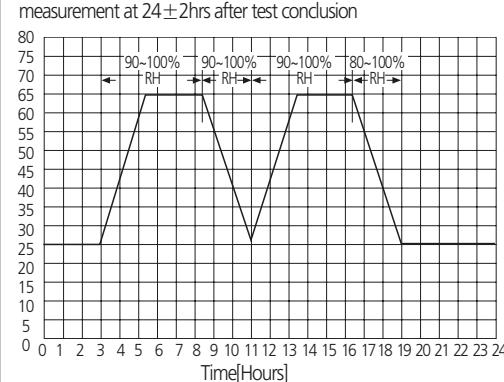

No	Item		Performance	Test Condition
6	Biased Humidity	Appearance		No abnormal exterior appearance
		Capacitance Change	CLASS I	Within $\pm 2.5\%$ or 0.25pF, (Whichever is larger)
			CLASS II	Within $\pm 12.5\%$
		Q	CLASS I	Capacitance $\geq 30\text{pF}$: $Q \geq 200$ $< 30\text{pF}$: $Q \geq 100 + (10/3) \times C$ (C : Capacitance)
		Tan δ	CLASS II	Rated Voltage $\geq 25V$: 0.035 max $\geq 16V$: 0.05 max $\geq 10V$: 0.075max *1)
		IR		More than $500\text{M}\Omega$ or $25\text{M}\Omega \times \mu\text{F}$ (Whichever is Smaller) *1)
7	High Temperature Operating Life	Appearance		No abnormal exterior appearance
		Capacitance Change	CLASS I	Within $\pm 3.0\%$ or 0.3pF, (Whichever is larger)
			CLASS II	Within $\pm 12.5\%$
		Q	CLASS I	Capacitance $\geq 30\text{pF}$: $Q \geq 350$ $\geq 10\text{pF}$: $Q \geq 275 + (5/2) \times C$ $< 10\text{pF}$: $Q \geq 200 + 10 \times C$ (C : Capacitance)
		Tan δ	CLASS II	Rated Voltage $\geq 25V$: 0.035 max $\geq 16V$: 0.05 max $\geq 10V$: 0.075max *1)
		IR		More than $1,000\text{M}\Omega$ or $50\text{M}\Omega \times \mu\text{F}$ (Whichever is smaller) *1)
8	External Visual		No abnormal exterior appearance	Microscope (x10)
9	Physical Dimensions		Within the specified dimensions	Using the calipers
10	Mechanical Shock	Appearance		No abnormal exterior appearance
		Capacitance Change	CLASS I	Within $\pm 2.5\%$ or 0.25pF, (Whichever is larger)
			CLASS II	Within $\pm 10\%$
		Q	CLASS I	Capacitance $\geq 30\text{pF}$: $Q \geq 1,000$ $< 30\text{pF}$: $Q \geq 400 + 20 \times C$ (C : Capacitance)
		Tan δ	CLASS II	Rated Voltage $\geq 25V$: 0.025 max $\geq 16V$: 0.035 max $\geq 10V$: 0.05 max *1)
		IR		More than $10,000\text{M}\Omega$ or $500\text{M}\Omega \times \mu\text{F}$ (Whichever is smaller) *1)

*1) : Indicates typical specification. Please refer to individual specifications.

*2) : Some of the parts are applicable in rated voltage x 150%, Please refer to individual specifications.

Part Numbering System

Standard & High Capacitors

Super Small Size Capacitors

High-Q Capacitors

Medium-High Voltage Capacitors

Array Type Capacitors

Low ESL Capacitors

Reliability Test Condition

Premium Capacitors for Automotive Applications

Packaging Specification

Application Manual for Surface Mounting



No	Item		Performance	Test Condition
11	Vibration	Appearance		No abnormal exterior appearance
		Capacitance Change	CLASS I	Within $\pm 2.5\%$ or 0.25pF, (Whichever is larger)
			CLASS II	Within $\pm 10\%$
		Q	CLASS I	Capacitance $\geq 30\text{pF}$: $Q \geq 1,000$ $< 30\text{pF}$: $Q \geq 400+20\times C$ (C : Capacitance)
		Tan δ	CLASS II	Rated Voltage $\geq 25\text{V}$: 0.025 max $\geq 16\text{V}$: 0.035 max $\geq 10\text{V}$: 0.05max *1)
		IR		More than $10,000\text{M}\Omega$ or $500\text{M}\Omega \times \mu\text{F}$ (Whichever is smaller) *1)
12	Resistance to Solder Heat	Appearance		No abnormal exterior appearance
		Capacitance Change	CLASS I	Within $\pm 2.5\%$ or 0.25pF, (Whichever is larger)
			CLASS II	Within $\pm 10\%$
		Q	CLASS I	Capacitance $\geq 30\text{pF}$: $Q \geq 1,000$ $< 30\text{pF}$: $Q \geq 400+20\times C$ (C : Capacitance)
		Tan δ	CLASS II	Rated Voltage $\geq 25\text{V}$: 0.025 max $\geq 16\text{V}$: 0.035 max $\geq 10\text{V}$: 0.05max *1)
		IR		More than $10,000\text{M}\Omega$ or $500\text{M}\Omega \times \mu\text{F}$ (Whichever is smaller) *1)
13	Thermal Shock	Appearance		No abnormal exterior appearance
		Capacitance Change	CLASS I	Within $\pm 2.5\%$ or 0.25pF, (Whichever is larger)
			CLASS II	Within $\pm 10\%$
		Q	CLASS I	Capacitance $\geq 30\text{pF}$: $Q \geq 1,000$ $< 30\text{pF}$: $Q \geq 400+20\times C$ (C : Capacitance)
		Tan δ	CLASS II	Rated Voltage $\geq 25\text{V}$: 0.025 max $\geq 16\text{V}$: 0.035 max $\geq 10\text{V}$: 0.05max *1)
		IR		More than $10,000\text{M}\Omega$ or $500\text{M}\Omega \times \mu\text{F}$ (Whichever is smaller) *1)
14	ESD	Appearance		No abnormal exterior appearance
		Capacitance Change	CLASS I	Within $\pm 2.5\%$ or 0.25pF, (Whichever is larger)
			CLASS II	Within $\pm 10\%$
		Q	CLASS I	Capacitance $\geq 30\text{pF}$: $Q \geq 1,000$ $< 30\text{pF}$: $Q \geq 400+20\times C$ (C : Capacitance)
		Tan δ	CLASS II	Rated Voltage $\geq 25\text{V}$: 0.025 max $\geq 16\text{V}$: 0.035 max $\geq 10\text{V}$: 0.05max *1)
		IR		More than $10,000\text{M}\Omega$ or $500\text{M}\Omega \times \mu\text{F}$ (Whichever is smaller) *1)

* *1) : Indicates typical specification. Please refer to individual specifications.

No	Item		Performance	Test Condition
15	Solderability		95% of the terminations is to be soldered evenly and continuously	a) Preheat at 155°C for 4 hrs, Immerse in solder for 5s at 235±5°C b) Steam aging for 8 hrs, Immerse in solder for 5s at 235±5°C c) Steam aging for 8 hrs, Immerse in solder for 120s at 260±5°C solder : a solution ethanol and rosin
16	Electrical Characterization	Capacitance		Within specified tolerance
		Q	CLASS I	Capacitance $\geq 30\text{pF}$: $Q \geq 1,000$ $< 30\text{pF}$: $Q \geq 400 + 20 \times C$ (C: Capacitance)
		Tanδ	CLASS II	Rated Voltage $\geq 25V$: 0.025 max $\geq 16V$: 0.035 max $\geq 10V$: 0.05max *1)
		IR@25°C		CLASS I More than 100,000MΩ or 1,000 MΩ × μF (Whichever is smaller) CLASS II More than 10,000MΩ or 500 MΩ × μF (Whichever is smaller)
		IR@125°C		CLASS I More than 10,000MΩ or 100 MΩ × μF (Whichever is smaller) CLASS II More than 1,000MΩ or 10 MΩ × μF (Whichever is smaller)
		Dielectric Strength		No dielectric breakdown or mechanical breakdown
		Appearance		No abnormal exterior appearance
17	Board Flex	Capacitance Change		Bending to the limit for 60 seconds Limit : Class I – 3mm Class II – 3mm The figure indicates typical specification. Please refer to individual specifications Initial Measurement Perform a heat treatment at 150+0/-10°C for 1hr after soldering process. And then let sit for 24±2hrs at room temperature. Perform the initial measurement. Final measurement Let measure within 24hrs at room temperature after test conclusion.
		Capacitance Change		Within ± 5.0% or 0.5pF, (Whichever is larger)
		Capacitance Change		Within ±10%
18	Terminal Strength(SMD)	Appearance		18N, for 60±1 sec. * 0603(1608) – 10N, 0402(1005) – 2N Initial Measurement Perform a heat treatment at 150+0/-10°C for 1hr after soldering process. And then let sit for 24±2hrs at room temperature. Perform the initial measurement. Final measurement Let measure within 24hrs at room temperature after test conclusion.
		Capacitance Change		Within ± 2.5% or 0.25pF, (Whichever is larger)
		Capacitance Change		Within ±10%
19	Beam Load		Destruction value should be exceed Chip Length $\leq 2.5\text{mm}$ a) Chip Thickness $> 0.5\text{ mm}$: 20N b) Chip Thickness $\leq 0.5\text{ mm}$: 8N Chip Length $\geq 3.2\text{mm}$ a) Chip Thickness $\geq 1.25\text{ mm}$: 54.5N b) Chip Thickness $< 1.25\text{ mm}$: 15N	Beam speed Chip Length $\leq 2.5\text{mm}$, $0.5 \pm 0.05\text{mm/sec}$ Chip Length $\geq 3.2\text{mm}$, $2.5 \pm 0.25\text{mm/sec}$
20	Capacitance Temperature Characteristics	Capacitance Change	CLASS I	0±30 ppm/°C
		Capacitance Change	CLASS II	Within ±15%
		Temperature Coefficient	CLASS I	0±30 ppm/°C
		Capacitance Drift	CLASS I	Within ± 0.2% or 0.05pF, (Whichever is larger)

*1) : Indicates typical specification. Please refer to individual specifications.

*If you want more detailed information, Please Visit Samsung Electro-mechanics website (www.semiconductor.samsung.com)

Part Numbering System

Standard & High Capacitors

Super Small Size Capacitors

High-Q Capacitors

Medium-High Voltage Capacitors

Array Type Capacitors

Low ESL Capacitors

Reliability Test Condition


Premium Capacitors for Automotive Applications

Packaging Specification

Application Manual for Surface Mounting


Packaging Specifications

Cardboard Paper Tape(4mm)

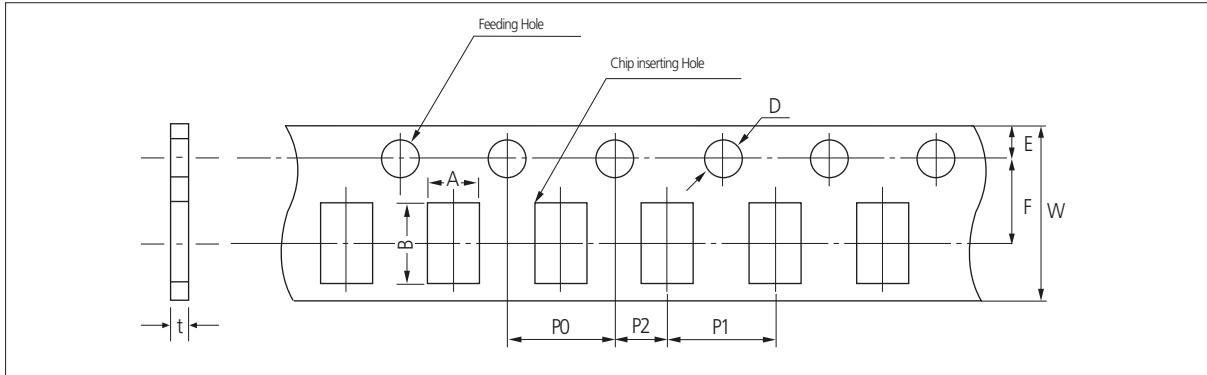


Unit: inch(mm)

Cardboard Paper Tape(2mm)

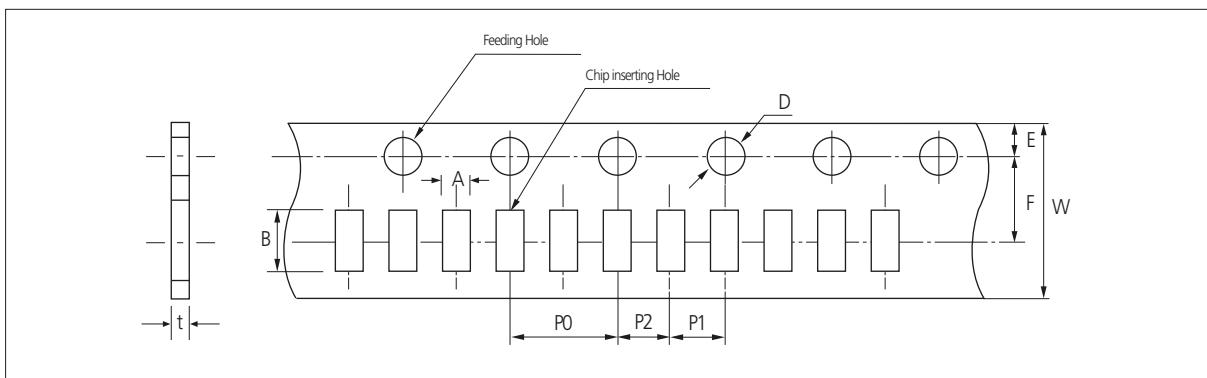

Unit: inch(mm)

Embossed Plastic Tape

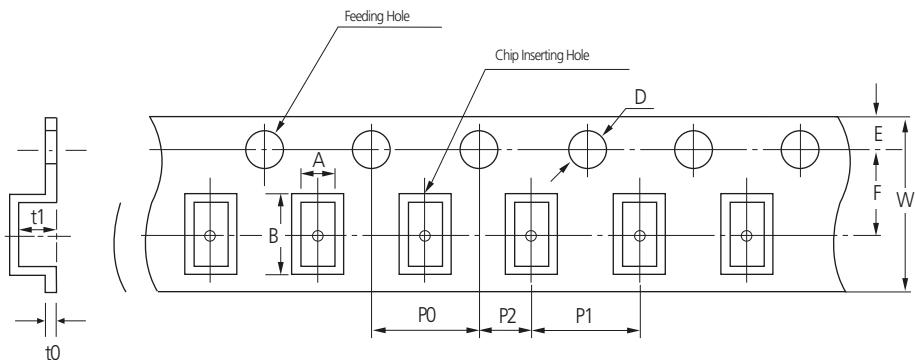


Unit: inch(mm)

Symbol Type	A	B	W	F	E	P1	P2	P0	D	t1	t0
Dimension	01005 (0402)	0.25 ± 0.02	0.45 ± 0.02	4.0 ± 0.05	1.8 ± 0.02	0.9 ± 0.05	1.0 ± 0.02	1.0 ± 0.02	2.0 ± 0.04	$\emptyset 0.8$ ± 0.04	0.25 ± 0.02
	0603 (1608)	1.05 ± 0.15	1.9 ± 0.15								
	0805 (2012)	1.45 ± 0.2	2.3 ± 0.2								
	1206 (3216)	1.9 ± 0.2	3.5 ± 0.2	8.0 ± 0.3	3.5 ± 0.05						
	1210 (3225)	2.8 ± 0.2	3.6 ± 0.2								
	1808 (4520)	2.3 ± 0.2	4.9 ± 0.2								
	1812 (4532)	3.6 ± 0.2	4.9 ± 0.2	12.0 ± 0.3	5.60 ± 0.05	1.75 ± 0.1	8.0 ± 0.1	2.0 ± 0.05	4.0 ± 0.1	$\emptyset 1.5$ $\pm 0.1/-0.03$	3.8 max
	2220 (5750)	5.5 ± 0.2	6.2 ± 0.2								
	0204 (5010)	0.62 $+0.05$ -0.10	1.12 $+0.05$ -0.10								
	0306 (0816)	1.1 ± 0.2	1.9 ± 0.2	0.8 ± 0.3	3.5 ± 0.05						
	0508 (1220)	1.45 ± 0.2	2.3 ± 0.2								
	0612 (1632)	2.0 ± 0.2	3.6 ± 0.2								

Peeling off of Cover Tape

- $10 \text{ g.f} \leq \text{Peel off force} \leq 70 \text{ g.f}$

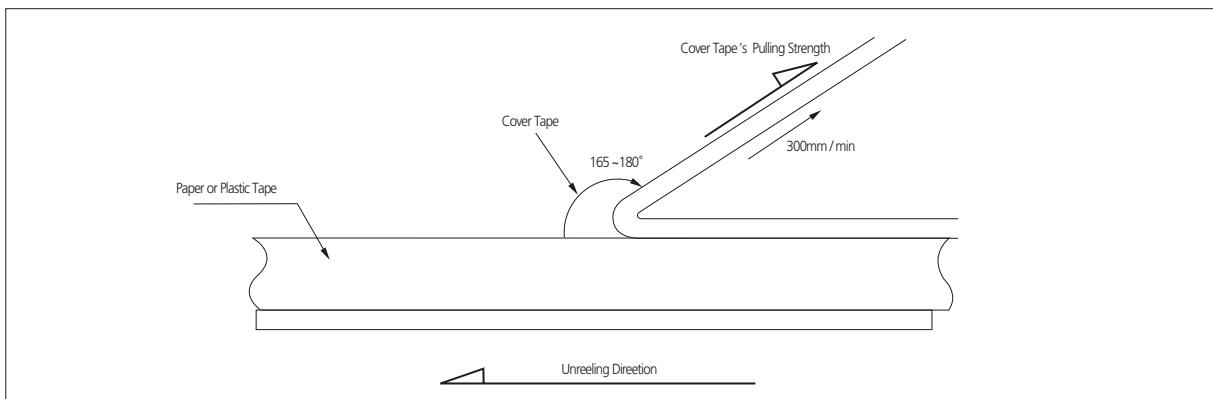

Part Numbering System

Standard & High Capacitors

Super Small Size Capacitors

High-Q Capacitors

Medium-High Voltage Capacitors

Array Type Capacitors

Low ESL Capacitors


Reliability Test Condition

Premium Capacitors for Automotive Applications

Packaging Specification

Application Manual for Surface Mounting


Taping Size

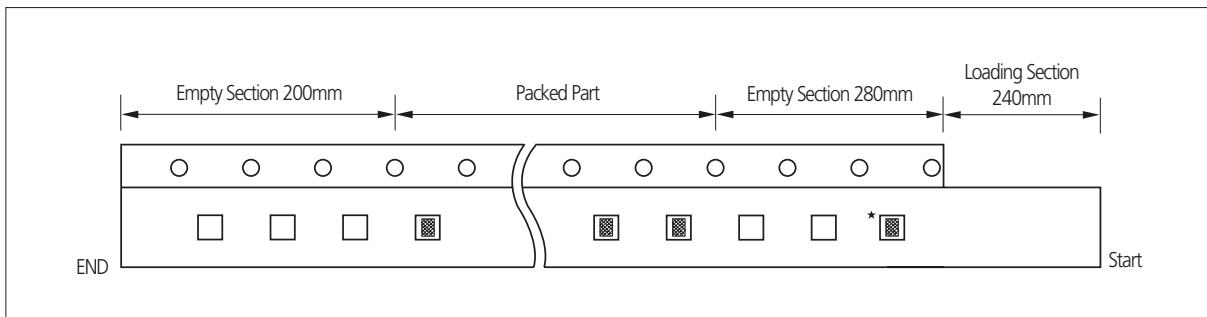

- The chip is only used for identifying the label and packaged products. Please don't use the chip.

Unit: kpc

Reel Dimensions

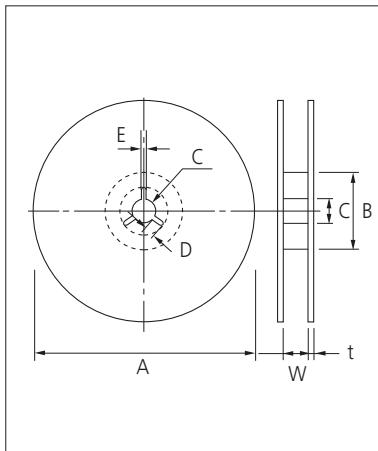

Unit: mm					
Symbol	Tape Width	A	B	C	D
7" Reel	8mm	$\varnothing 180+0/-3$	$\varnothing 60+1.0$	$\varnothing 13+0.3$	$4+0.2$
	12mm	$\varnothing 180+0/-3$	$\varnothing 60+1/-0$	$\varnothing 13+0.3$	$4+0.2$
10" Reel	8mm	$\varnothing 258+0/-3$	$\varnothing 80+1/-0$	$\varnothing 13+0.3$	$4+0.2$
	12mm	$\varnothing 258+0/-3$	$\varnothing 80+1/-0$	$\varnothing 13+0.3$	$4+0.2$
13" Reel	8mm	$\varnothing 330\pm2.0$	$\varnothing 80\pm1.0$	$\varnothing 13+0.3$	$4+0.2$
	12mm	$\varnothing 330\pm2.0$	$\varnothing 80\pm1.0$	$\varnothing 13+0.3$	$4+0.2$

Symbol	Tape Width	E	W	t
7" Reel	8mm	2.0 ± 0.5	9 ± 0.5	1.2 ± 0.2
	12mm	2.0 ± 0.5	13 ± 0.5	1.2 ± 0.2
10" Reel	8mm	2.0 ± 0.5	9 ± 0.5	1.8 ± 0.2
	12mm	2.0 ± 0.5	13 ± 0.5	1.8 ± 0.2
13" Reel	8mm	2.0 ± 0.5	9 ± 0.5	2.2 ± 0.2
	12mm	2.0 ± 0.5	13 ± 0.5	2.2 ± 0.2

Part Numbering System

Standard & High Capacitors

Super Small Size Capacitors

High-Q Capacitors

Medium-High Voltage Capacitors

Array Type Capacitors

Low ESL Capacitors

Reliability Test Condition


Premium Capacitors for Automotive Applications

Packaging Specification

Application Manual for Surface Mounting

Bulk Case Packaging

- Bulk case packaging can reduce the stock space and transportation costs.
- The bulk feeding system can increase the productivity.
- It can eliminate the components loss.

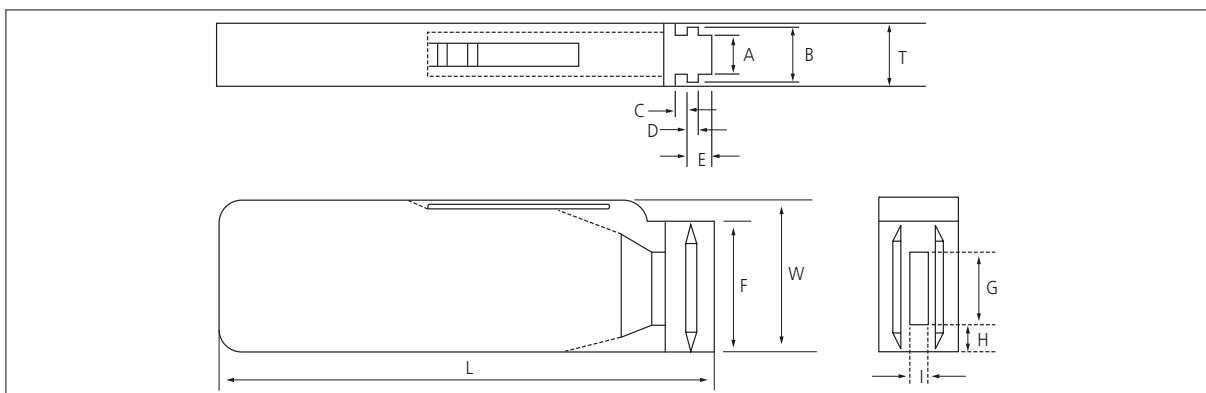

Unit: mm

Symbol	A	B	T	C	D	E
Dimension	6.8 ± 0.1	8.8 ± 0.1	12 ± 0.1	$1.5+0.1/-0$	$2+0/-0.1$	$3.0+0.2/-0$
Symbol	F	W	G	H	L	I
Dimension	$31.5+0.2/-0$	$36+0/-0.2$	19 ± 0.35	7 ± 0.35	110 ± 0.7	5 ± 0.35

• QUANTITY

Unit: inch(mm) and pcs

Size	0402(1005)	0603(1608)	0805(2012)	
			$T\leq0.85\text{mm}$	$T\geq1.0\text{mm}$
Quantity	50,000	10,000 or 15,000	10,000	5,000

Application Manual for Surface Mounting

1. Storage of products

1-1. Storage Environment

Tape packing materials are designed to withstand long-term storage, but they will degrade more rapidly in the presence of high temperature or high humidity. Therefore, the products must be stored in an ambient 5~40°C with a relative humidity of 20~70%. Allowable storage period is within 6 months from the outgoing date of delivery.

1-2. Corrosive Gases

Since sulfur and chlorine may degrade the solderability of the end termination, it is important to store the capacitors in an environment free of these gases.


1-3. Temperature Fluctuations

Since dew condensation may occur by the differences in temperature when the products are taken out of storage, it is important to maintain a temperature-controlled environment.

2. Design of Solder Land Pattern

When designing printed circuit boards, the shape and size of the solder lands must allow for the proper amount of solder on the capacitor. The amount of solder at the end terminations has a direct effect on the probability that the chip will crack. The greater amount of solder, the larger amount of stress on the chip, and the more likely that it will break. Use the following illustrations as guidelines for proper Solder land design.

Recommendation of solder Land Shape and Size

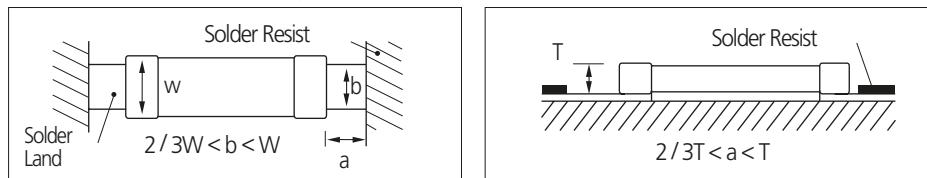

3. Adhesives

MLCCs generally require the use of an adhesive to position the chips to the circuit board prior to soldering.

3-1. Requirements for Adhesives

They must have enough adhesion so that the chips will not fall off or move during the handling of the circuit board.

They must maintain their adhesive strength when exposed to soldering temperatures.

They should not spread or run when applied to the circuit board.

They should have a long pot life.

They should harden quickly.


They should not corrode the circuit board or chip material.

They should be a good insulator.

They should be non-toxic, and not produce harmful gases, nor be harmful when touched.

3-2. Application Method

It is important to use the proper amount of adhesive. Too little will cause poor adhesion to the circuit board, and too much may strain the conductor pattern, thereby causing defective soldering. The following illustrations show the proper quantity of adhesive.

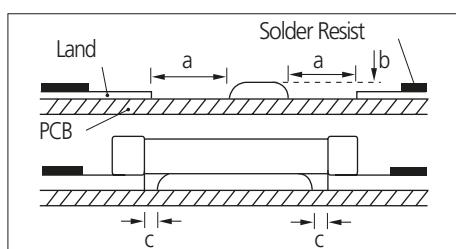

Type	21	31
a	0.2min	0.2min
b	70~100 μm	70~100 μm
c	>0	>0

3-3. Adhesive hardening Characteristics

To prevent oxidation of the terminations, the adhesive must harden at 160°C or less, within 2 minutes or less.


4. Mounting

4-1. Mounting Head Pressure

Excessive pressure will cause chip capacitors to crack. The pressure between nozzle and chip capacitor will be 300g maximum during mounting.

4-2. Bending Stress

Bending of printed circuit board by mounting head when double-sided circuit boards are used, chip capacitors first are mounted and soldered onto one side of the board. When the capacitors are mounted onto the other side, it is important to support the board as shown in the illustration. If the circuit board is not supported, it may bend, causing the already-installed capacitors to crack.

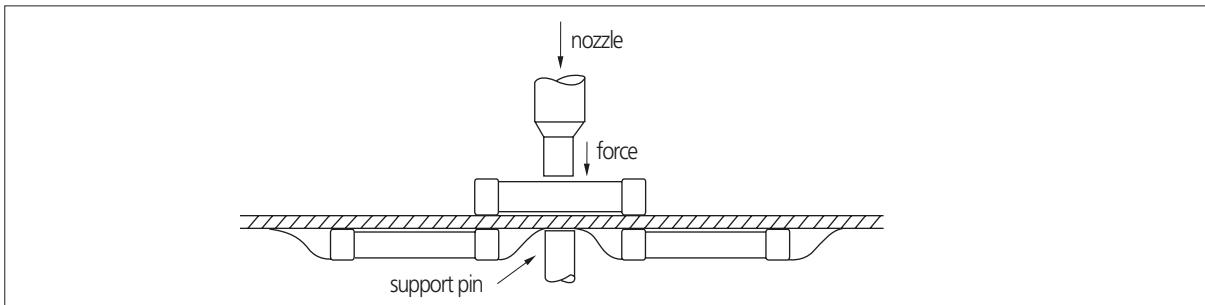

Part Numbering System

Standard & High Capacitors

Super Small Size Capacitors

High-Q Capacitors

Medium-High Voltage Capacitors

Array Type Capacitors

Low ESL Capacitors

Reliability Test Condition

Premium Capacitors for Automotive Applications

Packaging Specification

Application Manual for Surface Mounting

5. Flux

Although highly-activated flux gives better solderability, substances which increase activity may also degrade the insulation of the chip capacitors. To avoid such degradation, it is recommended that a mildly activated rosin flux (less than 0.2% chlorine) be used.

6. Soldering


Since a multilayer ceramic chip capacitor comes into direct contact with melted solder during soldering, it is exposed to potentially mechanical stress caused by the sudden temperature change. The capacitor may also be subject to silver migration, and to contamination by the flux. Because of these factors, soldering technique is critical.

6-1. Soldering Methods


Method	Classification	
Reflow soldering	· Overall heating	<ul style="list-style-type: none"> · Infrared rays · Hot plate · VPS (Vapor phase)
	· Local heating	<ul style="list-style-type: none"> · Air heater · Laser · Light beam
Flow soldering	<ul style="list-style-type: none"> · Single wave · Double wave 	

6-2. Soldering Profile

To avoid the crack problem by sudden temperature change, follow the temperature profile in the adjacent graph.

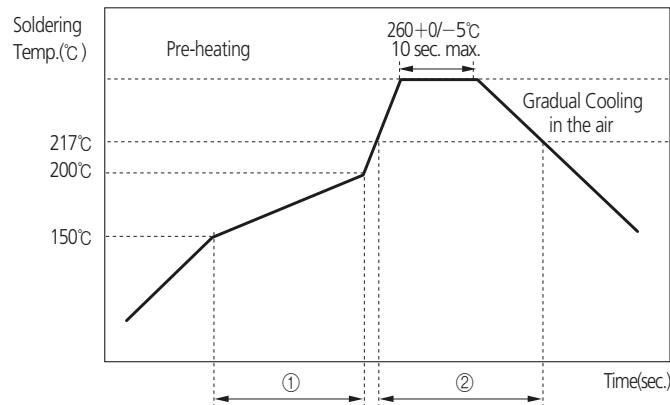6-2-1 Pb-Free (Sn 100%) Plating**■ REFLOW SOLDERING**

Soldering Temp. (°C)	Pre-heating Time (①, sec.)	Soldering Time (②, sec.)
260+0/-5°C	60~120	60~150

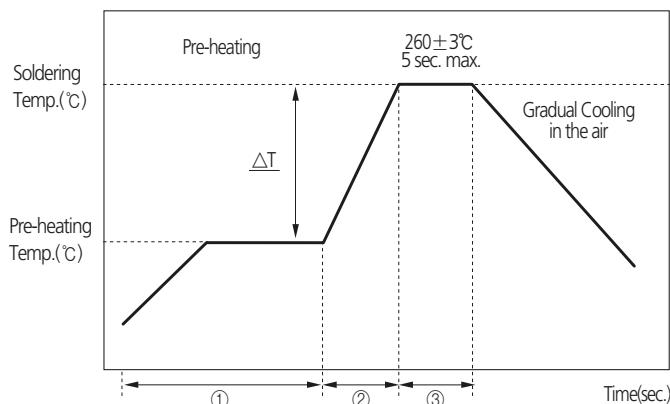■ FLOW SOLDERING

ΔT (°C)	Soldering Temp. (°C)	Pre-heating Time (①+②, sec.)	Soldering Time (③, sec.)
≤ 150 (1206 and below size)	260 ± 3	≥ 120	≤ 5

■ SOLDER IRON(Hand Soldering)

Variation of Temp.(°C)	Soldering Temp.(°C)	Pre-heating Time(sec.)	Soldering Time(sec.)	Cooling Time(sec.)	Condition of Iron Facilities		
					Wattage	Tip Diameter	Soldering Time
$\Delta T \leq 130$	$300 \pm 10^\circ\text{C}$ max.	≥ 60 sec.	≤ 4 sec.	—	20W max.	3mm max.	4 sec max.

※ Caution - Iron tip should not contact with ceramic body directly

6-3. Manual Soldering

Manual soldering can pose a great risk of creating thermal cracks in chip capacitors. The hot soldering iron tip comes into direct contact with the end terminations, and operator's carelessness may cause the tip of the soldering iron to come into direct contact with the ceramic body of the capacitor. Therefore the soldering iron must be handled carefully, and close attention must be paid to the selection of the soldering iron tip and to temperature control of the tip.


6-4. Amount of Solder

Too much Solder



Cracks tend to occur due to large stress.

Not enough solder



Weak holding force may cause bad connections or detaching of the capacitor

Part Numbering System

Standard & High Capacitors

Super Small Size Capacitors

High-Q Capacitors

Medium-High Voltage Capacitors

Array Type Capacitors

Low ESL Capacitors

Reliability Test Condition

Premium Capacitors for Automotive Applications

Packaging Specification

Application Manual for Surface Mounting

6-5. Cooling

Natural cooling using air is recommended. If the chips are dipped into solvent for cleaning, the temperature difference (ΔT) must be less than 100°C

6-6. Cleaning

If rosin flux is used, cleaning usually is unnecessary. When strongly activated flux is used, chlorine in the flux may dissolve into some types of cleaning fluids, thereby affecting the chip capacitors. This means that the cleaning fluid must be carefully selected, and should always be new.

7. Notes for Separating Multiple, Shared PC Boards

A multi-PC board is separated into many individual circuit boards after soldering has been completed. If the board is bent or distorted at the time of separation, cracks may occur in the chip capacitors. Carefully choose a separation method that minimizes the bending of the circuit board.

 **Attention**

1. This catalogue is valid only to the products purchased either from us or through our official distributors.
2. Product specifications included in this catalogue are effective as of Nov 1, 2015.
Please be advised that they are standard product specifications for reference only.
We may change, modify or discontinue the product specifications without notice at any time.
So, you need to approve the product specifications before placing an order. Should you have any question regarding our product specifications, please contact our sales personnel or application engineers.
3. We may modify or cease to produce the products listed in this catalogue without notice. Should you have any question, please contact our sales personnel or application engineers.
4. Without obtaining our permission, you should not be allowed to reproduce, copy, use or transfer any content or information contained this catalogue in any manner whatsoever for any purpose.
5. In no event, will we be responsible for any claim, dispute, damage or liability whatsoever arising from, relating to or in connection with your misuse of the products or/and information included in this catalogue.
We will also not assume any responsibilities whatsoever for any claim, dispute, damage or liability with regards to the intellectual property rights or other related rights of ours or any third party associated with your use of our products and/or information contained in this catalogue. We expressly disclaim that no license is granted regarding the aforementioned rights.
6. Please note that the products in this catalogue are not designed or intended to use for the applications set forth below. So, if you intend to use the products in this catalogue for the applications listed below, you should contact our sales personnel or application engineers before using.
Please be aware that any misuse of the products deviating from product specifications or information provided in this catalogue may cause a serious property damage or a personal injury.
 - ① Aerospace/Aviation equipment
 - ② Transportation equipment (vehicles, trains, ships, etc)
 - ③ Medical equipment
 - ④ Military equipment
 - ⑤ Disaster prevention/crime prevention equipment
 - ⑥ Any other applications with the same as or similar complexity or reliability to the applications set forth above.

Certifications

ISO/TS 16949



ISO 14001



OHSAS18001



Sony Green Partner



QC 080000 IECQ HSPM



Quality System Certification status for each factory site

<i>Certification</i>	<i>Suwon (Korea)</i>	<i>Busan (Korea)</i>	<i>Calamba (Philippines)</i>	<i>Tianjin (China)</i>	<i>Binhai (China)</i>
<i>ISO / TS 16949</i>	<i>BSI TS 91430 - 000</i>	<i>BSI TS 91430 - 001</i>	<i>BSI TS 91430 - 005</i>	<i>BSI TS 91430 - 007</i>	<i>BSI TS 91430 - 007</i>
Date Validity	2013-10-25 ~2016-10-24	2013-08-08 ~2016-08-07	2012-08-03 ~2015-08-02	2011-11-29 ~2014-11-28	2011-11-29 ~2014-11-28
<i>ISO 14001</i>	<i>BSI EMS 599427</i>	<i>BSI EMS 599427</i>	<i>BSI EMS 77354</i>	<i>BSI EMS 585363</i>	<i>BSI EMS 585363</i>
Date Validity	2013-06-25 ~2016-06-24	2013-06-25 ~2016-06-24	2012-07-13 ~2015-07-12	2012-04-17 ~2015-04-16	2012-04-17 ~2015-04-16
<i>OHSAS 18001</i>	<i>BSI OHS 599428</i>	<i>BSI OHS 599428</i>	<i>BSI OHS 568723</i>	<i>BSI OHS 585364</i>	<i>BSI OHS 585364</i>
Date Validity	2013-06-25 ~2016-06-24	2013-06-25 ~2016-06-24	2013-10-14 ~2016-10-13	2012-04-17 ~2015-04-16	2012-04-17 ~2015-04-16
<i>Sony Green Partner</i> Date Validity	2012-06-01 ~2014-05-31	2012-06-01 ~2014-05-31	2012-06-01 ~2014-05-31	2012-06-01 ~2014-05-31	2012-06-01 ~2014-05-31
<i>QC 080000</i>	<i>UL KR-HSPM-1011</i>	<i>UL KR-HSPM-1012</i>	<i>UL PI-HSPM-1001</i>	<i>UL PRC-HSPM-1767</i>	<i>UL PRC-HSPM-1767-2</i>
Date Validity	2013-06-17 ~2016-07-01	2013-06-27 ~2016-07-19	2013-06-27 ~2016-07-04	2013-07-08 ~2016-07-26	2013-07-08 ~2016-07-26

Note



Passive components sales offices

• Head office

150, Meayoungro(Maetan-dong)
Yeongtong-gu, Suwon-city,
Gyeonggi province, Korea, 443-743
Tel : +82-31-210-5114

Europe

Tel : +82-31-210-6328
E-mail : james.pyun@samsung.com

America

Tel : +82-31-210-6803
E-mail : wesley.roh@samsung.com

China

Tel : +82-31-210-3476
E-mail : james.h.lee@samsung.com

Japan

Tel : +82-31-210-6304
E-mail : jdkim1@samsung.com

Domestic

Tel : +82-31-210-3692
E-mail : jeongki.um@samsung.com

• Manufacturing sites

Suwon Plant(Korea)

150, Meayoungro(Maetan-dong)
Yeongtong-gu, Suwon-city,
Gyeonggi province, Korea, 443-743
Tel : +82-31-210-5114

Busan Plant (Korea)

333, Noksan Sanupjoongro(Songjeong-dong), Gangseo-gu, Busan, Korea, 618-270
Tel : +82-51-970-7114

Tianjin Plant (China)

27, Heiniucheng-Road, Tianjin, China 300210
Tel : +86-22-2830-3333

Binhai Plant(China)

No 80 xiaojing road,
TEDA west District, China
Tel : +86-22-6686-3333

Philippines Plant (Philippines)

Block 5 Calamba Premiere Industrial Park
Calamba City, Philippines
Tel : +63-49-508-8311

• Asia sales offices

Shenzhen office
46 F, New World Center, Yitian Road, Futian District, Shenzhen, China 518026
Tel : +86-755-8608-5579
E-mail : andy.li@samsung.com

Shanghai office
Rm. 1211, Shanghai International Trade Center No.2201 Yan An(W) Rd., Shanghai, China 200335
Tel : +86-21-2231-4341
E-mail : koogid@samsung.com

Beijing office
'12/F China Merchants Tower No. 118, Jian Guo Lu, Chao Yang District, Beijing, China
Tel : +86-10-6566-8100-6606
E-mail : kiko.wang@samsung.com

Qingdao Office
Rm 1201, Growne Plaza Qingdao 76, Xiang Gang Zhong Rd, Qingdao, 266071 China
Tel : +86-532-85779102
E-mail : zhengguo.cui@samsung.com

Taipei Office
9F-1, Np. 399 Ruey Kuang Rd., Neihu District, Taipei City, Taiwan, 114
Tel : +886-2-2656-8350
E-mail : kevin0130.wang@samsung.com

Singapore office
Samsung Electro-Mechanics Private Limited#3 Church Street Samsung Hub #23-01 Singapore 049483
Tel : +65-6933-2630
E-mail : alvin.koh@samsung.com

Bangkok office
24180 Wellgrow Industrial Estate, 93 Moo 5, Bangsamat A. Bangpakong, Chachoensao, Thailand
Tel : +66-38-562-110
E-mail : kyunghoon1.lee@samsung.com

Japan office
108-0075 Minato-ku Tokyo Kounan 2-16-4 Shinagawa Grand Cnetral Tower 9F, Japan
Tel : +81-3-6369-6452
E-mail : hikota.suga@samsung.com

• America sales office

Irvine office
3333 Michelson Drive, Suite 500, Irvine, CA 92612, USA
Tel : +1-949-797-8016
E-mail : andrew.skelly@samsung.com

San Jose office
601, McCarthy Blvd., San Jose, CA 95035, USA
Tel : +1-408-544-4552
E-mail : jay.pauer@samsung.com

Chicago office
1870 West Winchester Rd, Suite 247, Libertyville IL 60048, USA
Tel : +1-847-549-9424
E-mail : sweetys@samsung.com

• Europe sales offices

Frankfurt office
Samsung, Haus, Am Kronberger Hang 6, D-65824 Schwalbach/Ts. Germany
Tel : +49-6196-66-7255
E-mail : frank.goebel@samsung.com

London office
KT130NY 2nd floor, No 5. No 5. The Heights, Brooklands, Weybridge Surrey, England
Tel : +44-1932-826-811
E-mail : river.lee@samsung.com

Helsinki office
02600, Lars Sonckin Kaari 14, Espoo, Finland
Tel : +358-9-853-1132
E-mail : jouni.riuttanen@samsung.com

• Domestic Distributors

Korchip Corporation
359, Manan-ro, Manan-gu, Anyang-si, Gyeonggi-do, Korea
Tel : +82-31-361-8100
E-mail : parts@korchip.com

SAMT
315, Yeongdong-daero, Gangnam-gu, Seoul, Korea
Tel : +82-2-3458-9000
E-mail : info@isamt.com

CHUNG MAC
40-3, Gokseon-ro 49beon-gil, Gwonseon-gu, Suwon-si, Gyeonggi-do, Korea
Tel : +82-31-234-2367
E-mail : webmaster@chungmac.co.kr

YOUNGDUK
632, Seobusaet-gil, Geumcheon-gu, Seoul, Korea
Tel : +82-2-2107-7860
E-mail : dryblood@hanmail.net