

BEM 2D: EELS of rectangular waveguide for a parallel trajectory $\epsilon = 12 + i0.1$


$$s/W = 0.1$$

$$W = 400 \text{ nm}$$

$$b = 50 \text{ nm}$$

$$E_e = 200 \text{ keV}$$


$$h = 100 \text{ nm}$$

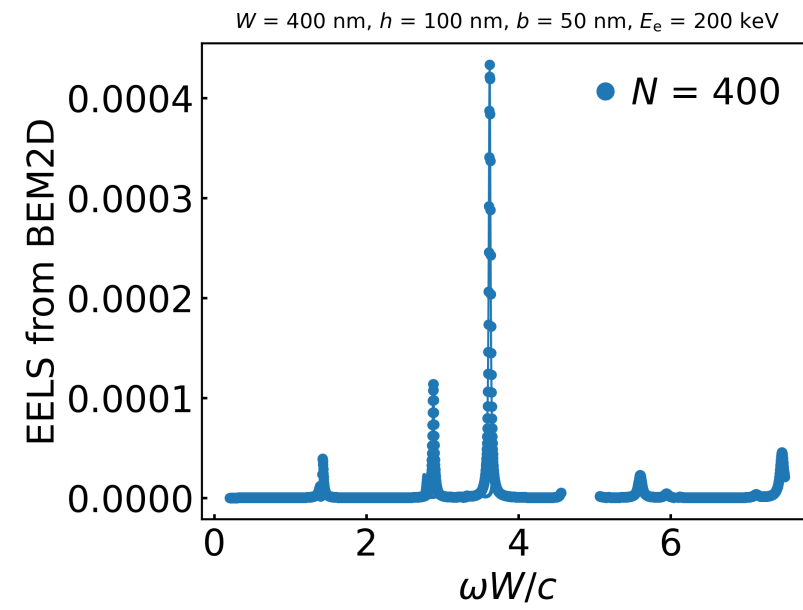




+ Bem2D still running
for $E_e = 100 \text{ keV}$
and more h

+ next steps:

$$h = 300 \text{ nm}$$

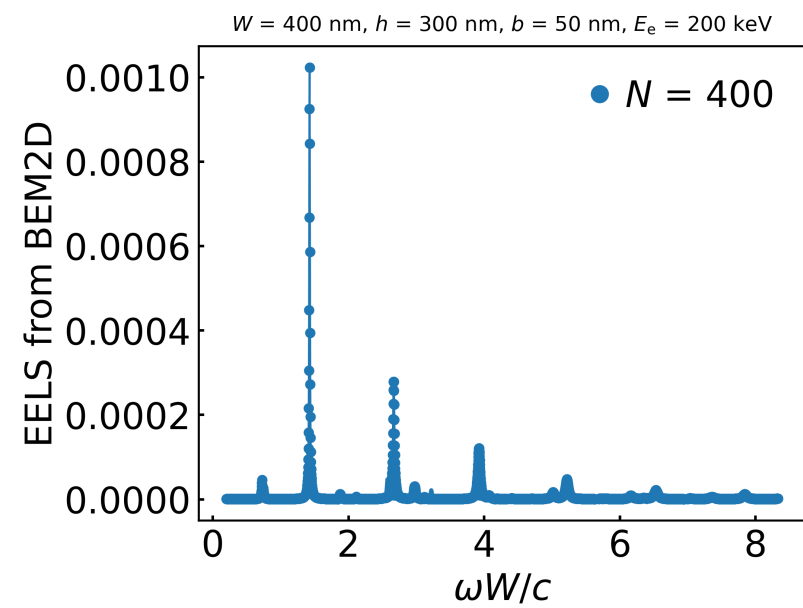


$$h = 400 \text{ nm}$$

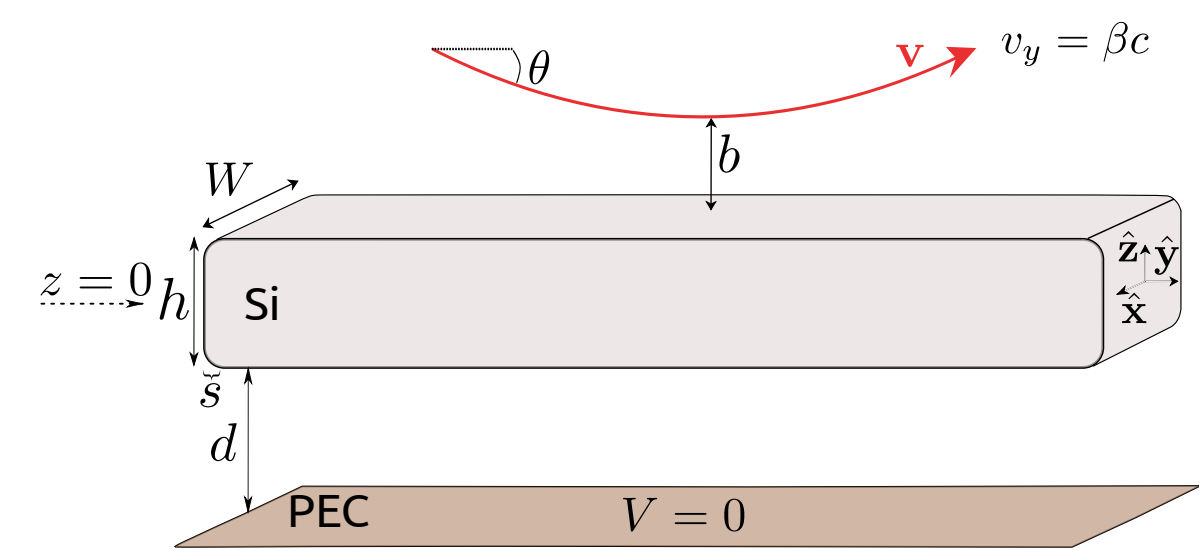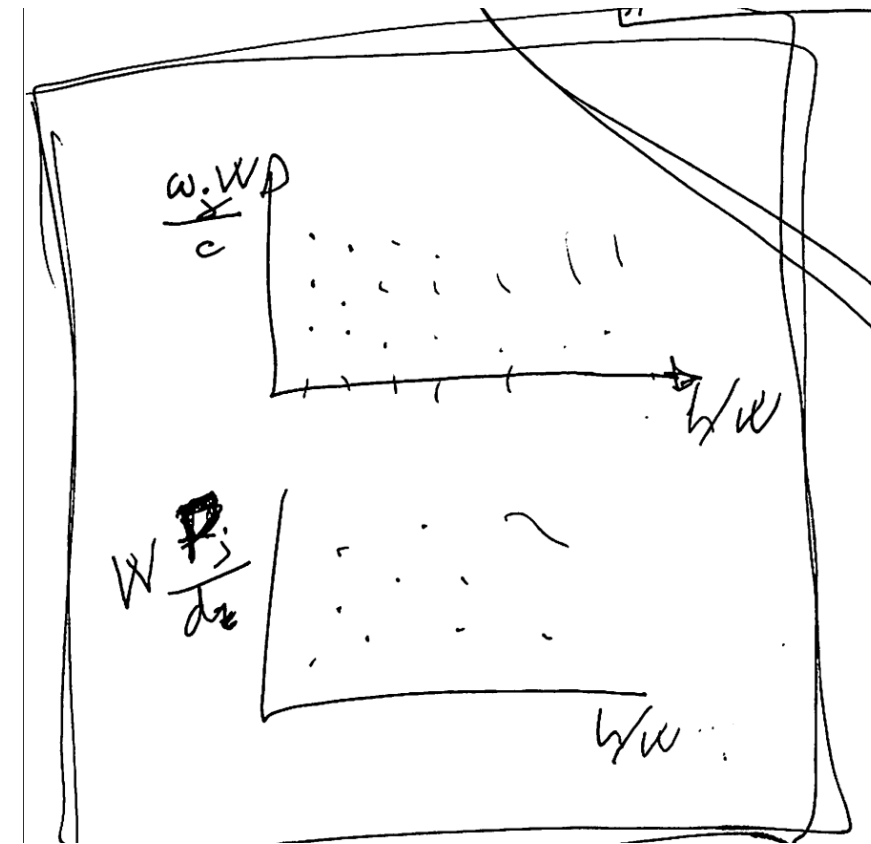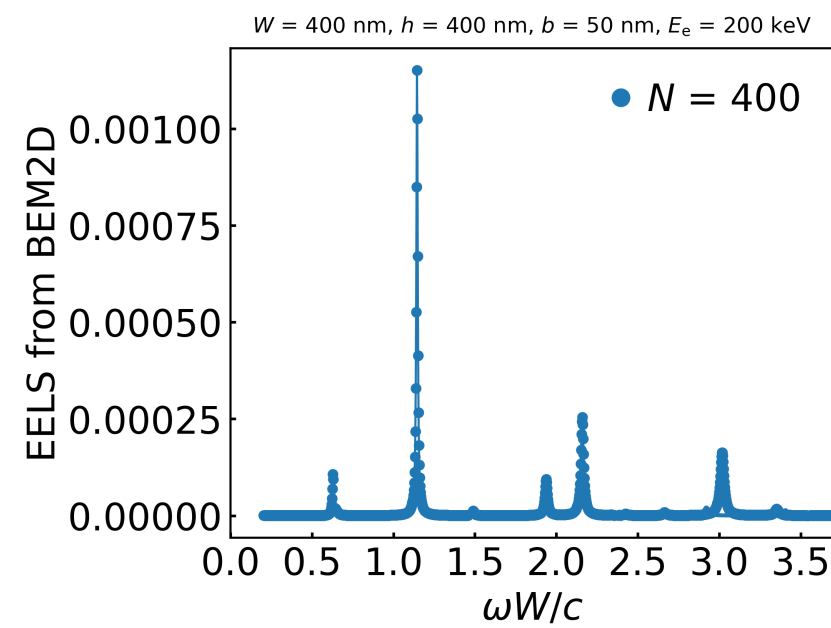

Potential

different d/W

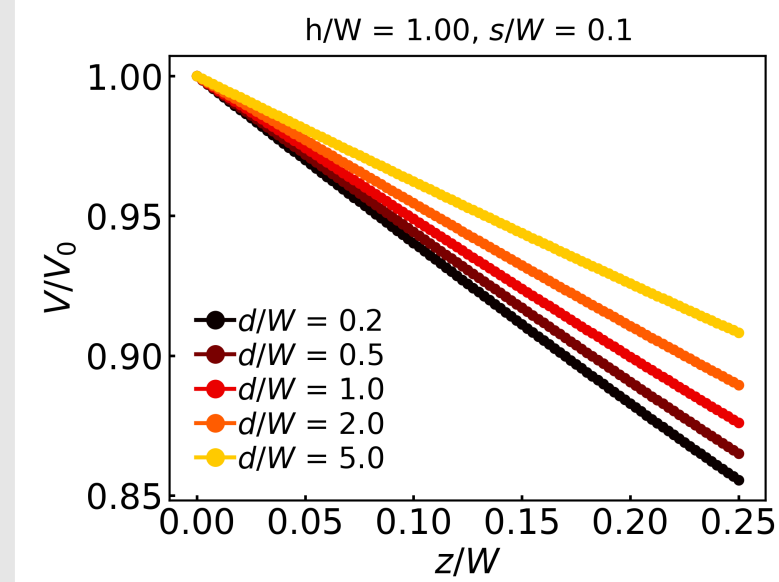

different h/W

