

Stable finite volume element schemes for the shallow ice approximation

Ed Bueler

Department of Mathematics and Statistics and Geophysical Institute, University of Alaska Fairbanks, USA
E-mail: elbueler@alaska.edu

ABSTRACT. The isothermal, non-sliding shallow ice approximation, combined with mass conservation, is a fundamental model for ice sheet and glacier flow. It determines the ice geometry and extent by the solution of a free-boundary problem. We solve the steady state form of this problem directly, without time-stepping, thereby demonstrating a fully-implicit scheme with no stability restrictions. We first re-interpret the Mahaffy (1976) finite difference method as a “finite volume element” scheme which has both an everywhere-defined approximate thickness function and a flux integral form of the conservation equation. From this re-interpretation we build an improved scheme with better quadrature in the integral and upwinding on that part of the flux which is proportional to the bed gradient. The discrete equations are then solved by a parallel Newton scheme which respects the constraint that ice thickness is nonnegative. The results show good accuracy on both flat bed and bedrock-step exact solutions. We then apply the method at high resolution to model the steady-state geometry of the Greenland ice sheet, using only bedrock elevation and present-day surface mass balance as input data.

INTRODUCTION

The first successful numerical approach to modeling ice sheet flow and geometry evolution in two horizontal dimensions was the classical finite difference (FD) scheme introduced by Mahaffy (1976). This scheme numerically solves the shallow ice approximation (SIA; Hutter, 1983) by computing the ice flux at staggered-grid points using particular choices when evaluating the ice thickness and surface slope. An advantage of the scheme is its relatively-small stencil, which reduces memory usage in implicit or semi-implicit implementations (Hindmarsh and Payne, 1996) and interprocess communication in parallel implementations.

However, existing numerical models solve the time-dependent SIA using explicit or semi-implicit time-stepping (Hindmarsh and Payne, 1996; Huybrechts and others, 1996; Bueler and others, 2005; Egholm and Nielsen, 2010; Jarosch and others, 2013). Time-stepping restrictions which arise in that context are needed to avoid classical instabilities at wavelengths comparable to the grid spacing (Morton and Mayers, 2005). However, Bueler and others (2005) and Jarosch and others (2013) point out that these schemes also involve *ad hoc* treatment of the free margin of the ice sheet, for example using projection to reset computed negative thicknesses back to zero. It would be desirable to escape both time-stepping restrictions and *ad hoc* margins by implicitly solving the SIA free boundary problem in a mathematically-principled manner.

Early work on the free-boundary problem in one horizontal dimension (Hindmarsh and others,

1987) avoided *ad hoc* margin treatment by tracking it as a moving grid point. Such margin-tracking does not easily extend to two dimensions, however, because the margin of real ice sheets is a curve of minimal smoothness and unknown-in-advance topology. Calvo and others (2000; 2002) avoid *ad hoc* margins by describing the time-dependent problem as a parabolic complementarity problem which includes the constraint that ice thickness is never negative, but their work is also limited to one horizontal dimension and flat bed. They solve each time step numerically by a projected Gauss-Siedel scheme (Ciarlet, 2002), which does not scale to large problem sizes.

Jouvet and Bueler (2012) pose and numerically-solve the steady-state free boundary problem as a variational inequality (Kinderlehrer and Stampacchia, 1980) in two spatial dimensions and with nontrivial bed topography. Because this variational inequality is not equivalent to a minimization problem, in the general (non-flat-bed) case, they solve it by iterating well-posed, but only approximate, minimization problems which converge to the full equations in a fixed-point limit. The success of this method is demonstrated in a 5 km grid steady-state calculation for Greenland using a piecewise-linear triangulation finite element (FE) method (Elman and others, 2005). In related work, Jouvet and Gräser (2013) solve the SIA component of their time-stepping hybrid ice dynamics model (Winkelmann and others, 2011) through a sequence of minimization problems which fix the thickness from the previous time-step. Each minimization

problem is solved by a constraint-adapted nonlinear multigrid Newton iteration.

In this paper we follow Jouvét and Bueler (2012) by solving the steady-state free boundary problem, but we use a Mahaffy-like scheme on a structured rectangular mesh and we apply the Newton iteration directly to the SIA problem. A continuation scheme generates an iterate within the domain of convergence of the Newton method, which then exhibits quadratic convergence to the solution of the full SIA problem. Our parallel implementation uses complementarity-problem Newton solvers (Benson and Munson, 2006) from the open-source PETSc library (Balay and others, 2014). Because we successfully solve the whole free-boundary problem at once, our improved scheme is unconditionally stable as a fully-implicit scheme, at least when the bed is not too rough.

The first part of this paper has a historical side. We re-interpret the classical Mahaffy scheme as using a non-standard quadrature choice in the conservation-of-mass flux integral. In this re-interpretation the approximate ice thickness lives in a continuous space of trial functions, unlike in the original FD form of the scheme. These trial functions are piecewise-bilinear on a structured grid of rectangles, that is, they are Q^1 finite elements (Elman and others, 2005). Because our re-interpretation has both finite volume (FV; LeVeque, 2002) and FE aspects, it is natural to regard the scheme as a “finite volume element” method (FVE; Cai, 1990; Ewing and others, 2002) in which the weak form is simply the flux integral itself. Adopting FVE terminology gives the best of both worlds: the unknown thickness is an everywhere-defined FE trial function and the discrete mass conservation equation is a flux-integral over a control volume (a la FV).

The paper is organized as follows. We start with a statement of the steady, isothermal SIA model. We then recall the classical Mahaffy scheme in FD form before re-interpreting it as an FVE scheme. We then propose better quadrature in the flux integral, and we add a bit of first-order upwinding on the part of the flux that comes from the bedrock slope. The resulting improved scheme, which has the same stencil as the classical Mahaffy scheme, is called “ M^\star .” Next we describe the Newton solver for the discrete equations and constraints, formulated as a nonlinear complementarity problem. First numerical results in verification cases are excellent for a flat-bed dome exact solution and better than those from higher-resolution upwind schemes on a bedrock-step exact solution. Then we show how the method is applied to real ice sheets by computing the steady state shape of the Greenland ice sheet, in a present-day modeled climate, at high resolution including grids down to 600 m. An Appendix

addresses the analytical calculation of the Jacobian in the M^\star scheme.

CONTINUUM MODEL

The time-dependent evolution equation for the ice thickness H is a statement of mass conservation:

$$\frac{\partial H}{\partial t} + \nabla \cdot \mathbf{q} = m. \quad (1)$$

Here \mathbf{q} denotes the vertically-integrated flux and m is the surface mass balance, also called the accumulation/ablation function.

The shallow ice approximation (SIA), the simplest relationship between H and \mathbf{q} in common use in glaciology, is a lubrication approximation (Fowler, 1997) of the Stokes equations for ice in non-sliding contact with the bed. We only consider the isothermal, Glen-law (Greve and Blatter, 2009) case. Let b be the bed elevation and $s = H + b$ the ice surface elevation. The flux \mathbf{q} is given by

$$\mathbf{q} = -\Gamma H^{n+2} |\nabla s|^{n-1} \nabla s \quad (2)$$

where $\Gamma = 2A(\rho g)^n/(n+2)$ is a positive constant derived from the power $n \geq 1$, ice softness A , ice density ρ , and gravity g .

The flux \mathbf{q} has several forms equivalent to (2). For instance, because it is common to combine equations (1) and (2) into a nonlinear diffusion equation (Huybrechts and others, 1996), one may write

$$\mathbf{q} = -D \nabla s \quad \text{where} \quad D = \Gamma H^{n+2} |\nabla s|^{n-1}. \quad (3)$$

Diffusion interpretation (3) is appropriate in the flat-bed case because (1) and (2) can be transformed to a p -Laplacian diffusion equation (Calvo and others, 2002), but a diffusion interpretation is obscured by the bed gradient ∇b .

If the bed is not flat then ∇s and ∇H are different, so the flux \mathbf{q} is not strictly diffusive because it is not opposite to the gradient of the conserved quantity, namely H . For this reason, non-flat beds are also a barrier to proving well-posedness of the steady SIA (Jouvét and Bueler, 2012).

As an alternative to the diffusion form one can instead compute a vertically-averaged velocity \mathbf{V} , and then treat the flux as arising from the transport of H by \mathbf{V} :

$$\mathbf{q} = \mathbf{V} H \quad \text{where} \quad \mathbf{V} = -\Gamma H^{n+1} |\nabla s|^{n-1} \nabla s. \quad (4)$$

In this case (1) is apparently a hyperbolic conservation equation, but this appearance is also deceiving because the velocity depends in part on the gradient of the transported quantity.

Furthermore, nonzero ∇b generates numerical conservation errors at the ice margin. In addressing such errors Jarosch and others (2013) propose a third form for the flux, namely

$$\mathbf{q} = \omega H^{n+2} \quad \text{where} \quad \omega = -\Gamma |\nabla s|^{n-1} \nabla s. \quad (5)$$

The vector field $\boldsymbol{\omega}$ can be thought of as a “velocity” which transports H^{n+2} . In this thinking the combination of (1) and (5) becomes a kind of nonlinear hyperbolic equation, but again $\boldsymbol{\omega}$ depends on the gradient of the transported quantity H so the combined equation is not truly hyperbolic.

We modify forms (3) and (5) to a split form

$$\mathbf{q} = -D\nabla H + \mathbf{W}H^{n+2}, \quad (6)$$

where D is the same as in (3) and where

$$\mathbf{W} = -\Gamma|\nabla s|^{n-1}\nabla b. \quad (7)$$

The vector field \mathbf{W} transports H^{n+2} , and in this case it is proportional to ∇b . Only the magnitude of \mathbf{W} is influenced by ∇H . Note that $\mathbf{W} = 0$ in the case of flat beds, while $\boldsymbol{\omega}$ is nonzero and \mathbf{q} is actually diffusive in that case.

In summary, the combination of (1) with any of the above flux forms (2)–(6) defines a highly-nonlinear diffusion-advection equation. Form (6) has the numerical advantage that we can apply a non-oscillatory transport scheme to $\mathbf{W}H^{n+2}$ while also preserving accuracy by applying a centered scheme to $-D\nabla H$. The presence of the often-dominant leading-order diffusion is a motivation to use implicit time-stepping, not a common approach for hyperbolic problems. Of course, implicit schemes for (1) need to determine the location of the free boundary at each time step.

In this paper we will primarily solve the steady-state form of (1), namely

$$\nabla \cdot \mathbf{q} = m. \quad (8)$$

By the divergence theorem, applied to any subregion V of Ω , we get the flux-integral form of the steady-state SIA, equivalent to (8),

$$\int_{\partial V} \mathbf{q} \cdot \mathbf{n} ds = \int_V m dx dy. \quad (9)$$

Here ∂V denotes the boundary of V , \mathbf{n} is the outward normal unit vector, and ds is the length element on the closed curve ∂V . Our numerical schemes will be based on (9).

Equations (8) and (9) represent a boundary-value problem in which the location where the boundary conditions $H = 0$ and $\mathbf{q} = 0$ apply is unknown (Jouvet and Bueler, 2012; Jarosch and others, 2013). The ice-covered domain where (8) applies cannot be treated as a small modification of a known boundary, though that is the approach taken in explicit time-stepping schemes for equation (1) (Huybrechts and others, 1996; Bueler and others, 2005).

To be more precise about boundary conditions, if the surface mass balance m is sufficiently-negative near the boundary of the computational domain Ω on which (8) is solved then $H \rightarrow 0$ at locations inside Ω , namely at the ice margin or free boundary, at which $\mathbf{q} \rightarrow 0$ simultaneously (Jouvet and Bueler,

2012). Because of the factor H^{n+2} in formula (3) for the diffusivity D , the problem has degenerate diffusivity, i.e. also $D \rightarrow 0$ at the free boundary. Solving equation (8), or computing a time-step of (1), as such a free-boundary problem, without a boundary flux applied along any part of the boundary of Ω , is usually called a “whole” ice sheet model. We restrict our attention to such whole ice sheet models.

Thus we solve coupled equations (3), (6), (7), and (9). The input data consist of the bed elevation $b(x, y)$ and the (steady) surface mass balance $m(x, y)$. These input data must be defined on a larger domain Ω than the ice-covered set. We assume m is sufficiently-negative near the boundary of Ω so that the ice-covered set is surrounded by ice-free areas. Any contact with the ocean must be modeled as strongly negative values of m , and there is no modeled floating ice. The solution is the nonnegative thickness function $H(x, y)$, defined everywhere in Ω and equal to zero where there is no ice.

METHODS

Classical Mahaffy scheme

Consider the rectangular structured FD grid, with spacing $\Delta x, \Delta y$, shown in Figure 1a. The Mahaffy (1976) scheme calculates a flux component at each of the staggered grid points (triangles) based on values of other fields at regular points (dots). For the staggered grid we introduce notation

$$x_j^\pm = x_j \pm \frac{\Delta x}{2}, \quad y_k^\pm = y_k \pm \frac{\Delta y}{2}. \quad (10)$$

At (x_j^+, y_k) the scheme computes the x -component of the flux by

$$q_{j+\frac{1}{2},k}^x = -\Gamma(\hat{H}_{j+\frac{1}{2},k})^{n+2} \alpha_{\blacktriangleright}^{n-1} \frac{s_{j+1,k} - s_{j,k}}{\Delta x} \quad (11)$$

where $s_{j,k} = H_{j,k} + b_{j,k}$,

$$\hat{H}_{j+\frac{1}{2},k} = \frac{H_{j,k} + H_{j+1,k}}{2}, \quad (12)$$

and “ $\alpha_{\blacktriangleright}$ ” is an estimate of $|\nabla s|$:

$$\alpha_{\blacktriangleright}^2 = \left(\frac{s_{j+1,k} - s_{j,k}}{\Delta x} \right)^2 + \left(\frac{s_{j,k+1} + s_{j+1,k+1} - s_{j,k-1} - s_{j+1,k-1}}{4\Delta y} \right)^2. \quad (13)$$

At (x_j, y_k^+) the scheme computes

$$q_{j,k+\frac{1}{2}}^y = -\Gamma(\hat{H}_{j,k+\frac{1}{2}})^{n+2} \alpha_{\blacktriangle}^{n-1} \frac{s_{j,k+1} - s_{j,k}}{\Delta y} \quad (14)$$

where $\hat{H}_{j,k+\frac{1}{2}}$ and α_{\blacktriangle} are defined by swapping the roles of j and k , and Δx and Δy , in equations (12) and (13). The slope approximation in (13) is perhaps the least-obvious aspect of the Mahaffy

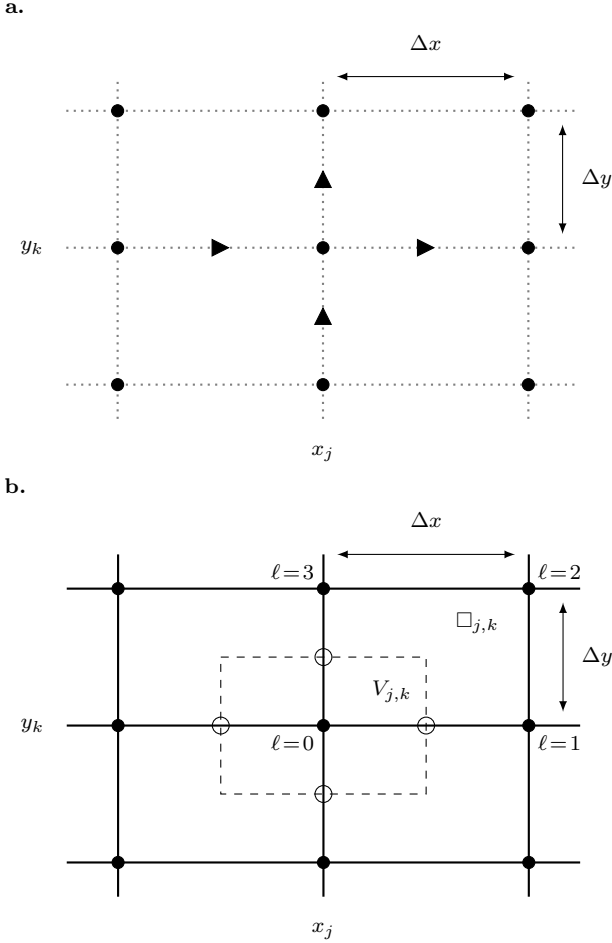


Fig. 1. **a.** A structured FD grid with regular (dots) and staggered (triangles) points. **b.** The same grid as an FVE grid with rectangular elements $\square_{j,k}$ (solid), nodes (dots), a dual rectangular control volume $V_{j,k}$ (dashed), and Mahaffy's flux-evaluation locations (circles). The corners of element $\square_{j,k}$ are indexed by ℓ .

scheme, but one may check that these FD formulas are consistent (Morton and Mayers, 2005) with (2).

The discretization of mass conservation equation (8) itself uses straightforward centered-differences (Morton and Mayers, 2005):

$$\frac{q_{j+1/2,k}^x - q_{j-1/2,k}^x}{\Delta x} + \frac{q_{j,k+1/2}^y - q_{j,k-1/2}^y}{\Delta y} = m_{j,k}. \quad (15)$$

Equation (15), which relates the nine unknown values of H at the regular grid points in Figure 1a, the “stencil” of the scheme, is combined with (11) and (14) to give an equation in an algebraic system.

FVE re-interpretation

The above description of the Mahaffy FD method is familiar to numerical ice sheet modelers, but we now re-derive the scheme from an FVE perspective. Our re-interpretation uses the same structured grid, but the regular grid points are now nodes (degrees of freedom) for a continuous space of trial functions. Any FE method supposes that an approximation H^h of the solution lies in a finite-dimensional space

of functions which are sufficiently well-behaved so that the approximate flux \mathbf{q}^h is defined almost-everywhere. In an FV method integral equation (9) is required to hold for a finite set of control volumes V which together tile Ω , which generates a finite system of nonlinear algebraic equations.

In Figure 1b, element $\square_{j,k}$ is the rectangle with lower-left corner at (x_j, y_k) . When associated with bilinear functions this rectangle is a Q^1 finite element (Elman and others, 2005). A basis for bilinear functions on $\square_{j,k}$ is the set

$$\chi_\ell \left(\frac{x - x_j}{\Delta x}, \frac{y - y_k}{\Delta y} \right), \quad (16)$$

for $\ell = 0, 1, 2, 3$, where

$$\begin{aligned} \chi_0(\xi, \eta) &= (1 - \xi)(1 - \eta), & \chi_1(\xi, \eta) &= \xi(1 - \eta), \\ \chi_2(\xi, \eta) &= \xi\eta, & \chi_3(\xi, \eta) &= (1 - \xi)\eta. \end{aligned}$$

With this order, $\chi_\ell = 1$ on element corners traversed in counter-clockwise order (Figure 1b).

Let S_h be the trial space of functions which are continuous on the whole computational domain Ω and bilinear on each element $\square_{j,k}$. Functions in S_h have a gradient which is defined almost everywhere, but the gradient is discontinuous along the element edges (solid lines in Figure 1b). We write $\psi_{j,k}(x, y)$ for the unique function in S_h so that $\psi_{j,k}(x_r, y_s) = \delta_{jr}\delta_{ks}$ (Figure 2a); such functions form a basis of S_h .

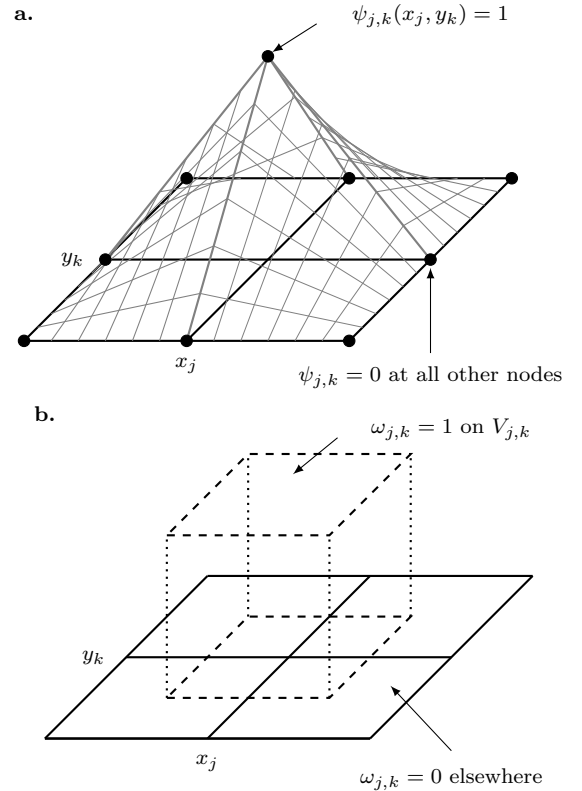


Fig. 2. **a.** A continuous “hat” basis function $\psi_{j,k}$ in the trial space S_h . **b.** A full FE interpretation would use piecewise-constant basis functions $\omega_{j,k}$ from the test space S_h^* .

We seek an approximate solution H^h from S_h . Also let b^h in S_h be the interpolant of the bed elevation data b , and let $s^h = H^h + b^h$. We denote by \mathbf{q}^h the flux computed from formula (6) using H^h , b^h , and s^h , so that \mathbf{q}^h is well-defined on the interior of each element.

Let $V_{j,k}$ be the control volume with center at (x_j, y_k) shown in Figure 1b. In the FVE method we require (9) to hold for $\mathbf{q} = \mathbf{q}^h$ and V equal to each $V_{j,k}$. Because we use a periodic grid with N_x rectangles in the x -direction and N_y in the y -direction, there are $N = N_x N_y$ nodes, N distinct control volumes, and N equations in the algebraic system.

Instead of control volumes, in a full FE interpretation we would introduce test functions, as follows. Let S_h^* be the space of functions which are constant on each control volume $V_{j,k}$. These functions are piecewise-constant and (generally) discontinuous only along the control volume edges. Bases of both spaces S_h and S_h^* are formed by those functions which are one at a single node and zero at all other nodes; Figure 2b shows such a function $\omega_{j,k}$. Requiring (9) to hold for each control volume in our FVE method is equivalent to multiplying (8) by $\omega_{j,k}$ and then integrating-by-parts, but showing the equivalence requires generalized functions. (The derivative of a step function is a Dirac delta function.) We adopt the FVE interpretation, however, so we have no further need for test functions from S_h^* .

Both the classical Mahaffy scheme, and our improved scheme below, assume midpoint quadrature on the right-hand integral in (9), so we seek H^h in S_h satisfying

$$\int_{\partial V_{j,k}} \mathbf{q}^h \cdot \mathbf{n} ds = m_{j,k} \Delta x \Delta y \quad (17)$$

for all j, k . It remains to do quadrature on the left in (17), however. We decompose the integral over the four edges of $\partial V_{j,k}$:

$$\begin{aligned} \int_{\partial V_{j,k}} \mathbf{q}^h \cdot \mathbf{n} ds &= \int_{y_k^-}^{y_k^+} q^x(x_j^+, y) dy \\ &\quad + \int_{x_j^-}^{x_j^+} q^y(x, y_k^+) dx \\ &\quad - \int_{y_k^-}^{y_k^+} q^x(x_j^-, y) dy \\ &\quad - \int_{x_j^-}^{x_j^+} q^y(x, y_k^-) dx. \end{aligned} \quad (18)$$

The flux \mathbf{q}^h is a bounded function which is discontinuous across element boundaries. In the first right-hand integral in (18) the integrand $f(y) = q^x(x_j^+, y)$ has a jump discontinuity at the midpoint of the interval of integration (i.e. at $y = y_k$).

Specifically, $\partial s^h / \partial y = s_y^h$ is discontinuous at $y = y_k$. But formula (11) in the Mahaffy FD scheme computes the normal component of \mathbf{q}^h exactly at that midpoint.

The key to re-interpreting the Mahaffy scheme is to see that it computes each integral in (18) by the midpoint method *using averages of the discontinuous surface gradient across its jump discontinuities*. The scheme does not use true quadrature because the integrand $\mathbf{q}^h \cdot \mathbf{n}$ does not have a value at the quadrature point.

To turn this idea into formulas, observe that both the thickness H^h and the x -derivative $\partial s^h / \partial x = s_x^h$ are continuous along the edge between elements $\square_{j,k}$ and $\square_{j,k-1}$. In fact, using the element basis (16) the surface gradient on $\square_{j,k}$ has components

$$\begin{aligned} s_x^h(x, y) &= \frac{s_{j+1,k} - s_{j,k}}{\Delta x} \left(1 - \frac{y - y_k}{\Delta y}\right) \\ &\quad + \frac{s_{j+1,k+1} - s_{j,k+1}}{\Delta x} \left(\frac{y - y_k}{\Delta y}\right), \\ s_y^h(x, y) &= \frac{s_{j,k+1} - s_{j,k}}{\Delta y} \left(1 - \frac{x - x_j}{\Delta x}\right) \\ &\quad + \frac{s_{j+1,k+1} - s_{j+1,k}}{\Delta y} \left(\frac{x - x_j}{\Delta x}\right). \end{aligned} \quad (19)$$

On $\square_{j,k-1}$, s_x^h and s_y^h can be calculated by shifting the index k to $k-1$. Thus the continuous function s_x^h has value

$$s_x^h(x_j^+, y_k) = \frac{s_{j+1,k} - s_{j,k}}{\Delta x} \quad (20)$$

at the midpoint $y = y_k$ in the first integral in (18). Similarly, writing-out H^h using element basis (16) gives

$$H^h(x_j^+, y_k) = \frac{H_{j,k} + H_{j+1,k}}{2} \quad (21)$$

at the midpoint, which is (12). But the y -derivative s_y^h has different values above (on $\square_{j,k}$) and below (on $\square_{j,k-1}$) the element boundary at $y = y_k$. The limits are:

$$\begin{aligned} s_y^h(x_j^+, y_k + 0) &= \frac{s_{j,k+1} - s_{j,k} + s_{j+1,k+1} - s_{j+1,k}}{2\Delta y}, \\ s_y^h(x_j^+, y_k - 0) &= \frac{s_{j,k} - s_{j,k-1} + s_{j+1,k} - s_{j+1,k-1}}{2\Delta y}. \end{aligned} \quad (22)$$

The average of these values is not a value of s_y^h , but a re-construction:

$$\widehat{s_y^h}(x_j^+, y_k) = \frac{s_{j,k+1} + s_{j+1,k+1} - s_{j,k-1} - s_{j+1,k-1}}{4\Delta y}. \quad (23)$$

Formula (23) is exactly the estimate of $\partial s / \partial y$ which appears in Mahaffy's FD formula (13).

In our FVE re-interpretation, the Mahaffy scheme uses (20), (21), and (23) in the midpoint rule for the

first integral in (18)

$$\int_{y_k^-}^{y_k^+} q^x(x_j^+, y) dy \quad (24)$$

$$\approx -\Delta y \Gamma H^h(x_j^+, y_k)^{n+2} \alpha_{\blacktriangleright}^{(n-1)/2} s_x^h(x_j^+, y_k).$$

where

$$\alpha_{\blacktriangleright}^2 = s_x^h(x_j^+, y_k)^2 + \widehat{s}_y^h(x_j^+, y_k)^2 \quad (25)$$

is the same as in (13). Thus Mahaffy's scheme approximates each integral on the right in (18) by a perfectly-reasonable quadrature "crime" (compare Strang, 1972) which averages across a discontinuity to reconstruct a slope. Recognizing the Mahaffy choice as quadrature-like, in this FVE context, is beneficial because it allows us to do it better.

Improved scheme

If the goal is to accurately-generate an algebraic equation from (17) by quadrature along $\partial V_{j,k}$ then it is easy to improve upon the Mahaffy technique by improving quadrature. We also use flux decomposition (6) with an upwind-type discretization on the bed gradient term $\mathbf{W}H^{n+2}$. Together these improvements define the "M \star " scheme.

As already noted, the numerical approximation \mathbf{q}^h from (6) is defined and smooth on the interior of each element, but discontinuous across element boundaries. So we break each interval of integration on the right side of (18) into two parts and use the midpoint rule, the optimal one-point rule, on each half. For example, we break the first integral at $y = y_k$:

$$\int_{y_k^-}^{y_k^+} q^x(x_j^+, y) dy \quad (26)$$

$$= \int_{y_k^-}^{y_k} q^x(x_j^+, y) dy + \int_{y_k}^{y_k^+} q^x(x_j^+, y) dy$$

$$\approx \frac{\Delta y}{2} (q^x(x_j^+, y_k - \frac{\Delta y}{4}) + q^x(x_j^+, y_k + \frac{\Delta y}{4})).$$

Recalling notation (10), values $q^x(x_j^+, y_k \pm \frac{\Delta y}{4})$ are evaluations of \mathbf{q}^h at points of continuity. Similar formulas to (26) apply to the other three integrals on the right side of (18).

Figure 3 shows all eight quadrature points needed to compute the full integral over $\partial V_{j,k}$ in (17). At each quadrature point we evaluate the x - or y -component of \mathbf{q}^h and multiply by a constant to get the appropriate integral. Our approximation of (17) is

$$\sum_{s=0}^7 \mathbf{c}_s \cdot \mathbf{q}^h(x_j^s, y_k^s) = m_{j,k} \Delta x \Delta y \quad (27)$$

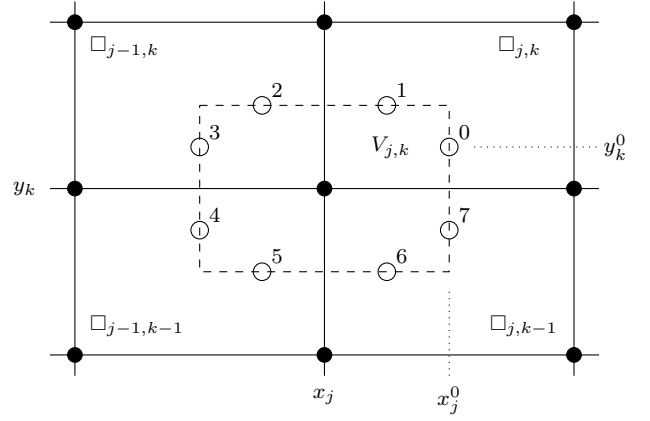


Fig. 3. For equation (27) we evaluate $\mathbf{q}^h(x, y)$ at eight quadrature points (numbered circles) along $\partial V_{j,k}$ (dashed).

where

$$\begin{aligned} \mathbf{c}_0 &= \mathbf{c}_7 = (0, \frac{\Delta y}{2}), \\ \mathbf{c}_1 &= \mathbf{c}_2 = (\frac{\Delta x}{2}, 0), \\ \mathbf{c}_3 &= \mathbf{c}_4 = (0, -\frac{\Delta y}{2}), \\ \mathbf{c}_5 &= \mathbf{c}_6 = (-\frac{\Delta x}{2}, 0), \end{aligned} \quad (28)$$

and

$$\begin{aligned} x_j^0 &= x_j^7 = x_j + \frac{\Delta x}{2}, & y_k^1 &= y_k^2 = y_k + \frac{\Delta y}{2}, \\ x_j^1 &= x_j^6 = x_j + \frac{\Delta x}{4}, & y_k^0 &= y_k^3 = y_k + \frac{\Delta y}{4}, \\ x_j^2 &= x_j^5 = x_j - \frac{\Delta x}{4}, & y_k^4 &= y_k^7 = y_k - \frac{\Delta y}{4}, \\ x_j^3 &= x_j^4 = x_j - \frac{\Delta x}{2}, & y_k^5 &= y_k^6 = y_k - \frac{\Delta y}{2}. \end{aligned} \quad (29)$$

Implementing equation (27) requires evaluating \mathbf{q}^h at eight quadrature points, twice the number for the classical method, but the stencils are the same because we use the same nine nodal values of H^h . One could propose further-improved quadrature, replacing the midpoint rule by higher-order methods (e.g. 2-point Gauss-Legendre). Also, our Q^1 elements could be replaced by higher-order (e.g. Q^2) elements. Though such methods have not been tested, in fact the largest numerical SIA errors occur near the ice margin where the solution H has unbounded gradient (Bueler and others, 2005). Thus higher-order quadrature and interpolation will not give much advantage. We believe our improved method represents a measurable accuracy and Newton-iteration-convergence improvement over the classical Mahaffy method (Results section) because it evaluates \mathbf{q}^h at points of continuity, not because the order of quadrature or interpolation is flawed in the classical scheme.

Jarosch and others (2013) show that the Mahaffy scheme can suffer from significant mass conservation errors at locations of abrupt change in the bed elevation. In such cases where the bed gradient dominates the flux, the mass conservation equation has "hyperbolic" character. Thus they use a high-resolution upwind scheme (LeVeque, 2002) based on

flux form (5). They show reduced mass conservation errors in the sense of giving numerical solutions which are closer in volume to an exact solution. On the other hand, their scheme, which solves the time-dependent problem (1) using explicit time-stepping, expands the stencil because it needs values two grid spaces away.

By comparison, we propose using minimal first-order upwinding based on form (6) of the flux, even though upwinding is not required for linear stability or non-oscillation of our implicit scheme (Morton and Mayers, 2005). Numerical testing suggests upwinding is effective in our case because it improves the conditioning of the Jacobian matrix used in the Newton iteration (not shown).

In our improved scheme the transport flux $\tilde{\mathbf{q}} = \mathbf{W}H^{n+2}$ uses H evaluated at a location different from the quadrature point, according to the direction of \mathbf{W} evaluated at the quadrature point. For instance, our upwind modification at (x_j^0, y_k^0) —see Figure 3—uses the sign of

$$W_*^x = W^x(x_j^0, y_k^0), \quad (30)$$

where $\mathbf{W} = (W^x, W^y)$. Note that the sign of W_*^x is opposite that of the x -component of ∇b^h at (x_j^0, y_k^0) . We shift the evaluation of H upwind by a fraction $0 \leq \lambda \leq 1$ of an element width,

$$\begin{aligned} \tilde{\mathbf{q}}^x(x_j^0, y_k^0) &= W_*^x \begin{cases} H(x_j^0 - \lambda \frac{\Delta x}{2}, y_k^0)^{n+2}, & W_*^x \geq 0, \\ H(x_j^0 + \lambda \frac{\Delta x}{2}, y_k^0)^{n+2}, & W_*^x < 0, \end{cases} \end{aligned} \quad (31)$$

where $\lambda = 0$ is no upwinding and $\lambda = 1$ is the maximum upwinding that does not expand the stencil. After experimentation (Results section) we chose $\lambda = 1/4$ (Figure 4). This value is seen to be large enough to improve the convergence of the Newton iteration but also small enough to generate substantial improvements in accuracy for the bedrock-step exact solution. Upwinding at the other seven points along $\partial V_{j,k}$ (Figure 3) uses similar formulas.

The “M \star ” scheme combines both improvements, namely better quadrature and a bit of upwinding. We will see in verification (Results section) that it achieves higher solution accuracy than either the apparently second-order Mahaffy scheme or the higher-resolution explicit advection scheme of Jarosch and others (2013). (As our Newton solver needs a differentiable residual function, the additional non-smoothness of high-resolution flux methods suggests caution.) Convergence of the Newton iteration is also improved compared to the classical Mahaffy scheme. The evidence suggests that our form of upwinding is most important at locations of low regularity of the solution.

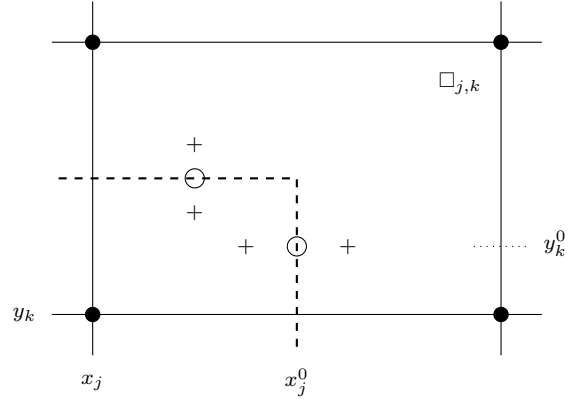


Fig. 4. On element $\square_{j,k}$, when computing the flux at quadrature points (circles), upwinding of the flux term $\tilde{\mathbf{q}} = \mathbf{W}H^{n+2}$ evaluates the thicknesses H at locations shown with “+”, one quarter of the way to the element boundary.

Solution of the equations

We are ready to write down a system of nonlinear algebraic equations, but it remains to describe the numerical solution of this system. This is nontrivial because inequality constraints apply to each unknown.

Each equation from the M \star scheme is simply (27) with an upwind modification like (31) at the quadrature points. The resulting highly-nonlinear system of $N = N_x N_y$ equations is

$$F_{j,k}(\mathbf{H}) = 0. \quad (32)$$

This determines N unknowns, a vector $\mathbf{H} = \{H_{j,k}\}$; note $H^h(x, y)$ and \mathbf{H} are actually two representations of the same discrete thickness approximation. System (32) is not adequate by itself, however, because each unknown thickness $H_{j,k}$ must be nonnegative, i.e.

$$\mathbf{H} \geq 0. \quad (33)$$

Requirements (32) and (33) can be combined into a variational inequality (Jouvet and Bueler, 2012; Kinderlehrer and Stampacchia, 1980). Equivalently, we can write them in complementarity problem form (Benson and Munson, 2006):

$$\mathbf{H} \geq 0, \quad \mathbf{F}(\mathbf{H}) \geq 0, \quad \mathbf{H} \cdot \mathbf{F}(\mathbf{H}) = 0. \quad (34)$$

We will solve (34) by a “constrained” Newton solver, specifically by either the reduced-space or semi-smooth methods (Benson and Munson, 2006) implemented in PETSc (Balay and others, 2014). Our open-source C code¹ contains residual and Jacobian evaluation subroutines, but parallel grid management, Newton solver, iterative linear solver, and linear preconditioning are all consigned to PETSc choices made at runtime. Both multigrid

¹Clone the repository at <https://github.com/bueler/sia-fve>. Then see `README.md` in directory `petsc/` to compile `mahaffy.c` and run the examples.

(Briggs and others, 2000) and additive-Schwarz-type domain decomposition (Smith and others, 1996) preconditioning are found to work, but the latter is more robust and is used in all runs in the Results section.

The Jacobian of system (32), i.e. the $N \times N$ matrix

$$J = \left(\frac{\partial F_{j,k}}{\partial H_{p,q}} \right), \quad (35)$$

can be computed via hand-calculated derivatives. This additional effort (Appendix) gives a speed-up by a rough factor of 1.5 over the alternative, namely finite-difference (FD) computation of Jacobian entries coming from additional residual (i.e. F) evaluations. Such FD Jacobians are efficiently-implemented in PETSc using “coloring” of the nodes (Curtis and others, 1974) so that, from the nine-point stencil, only ten residual evaluations are needed to approximate J .

In the standard theory of convergence of Newton’s method, quadratic convergence should occur if J is Lipschitz-continuous as a function of the unknowns (Kelley, 2003). However, the flux \mathbf{q} here is generally not that smooth as a function of ∇H . In particular, for $1 < n < 3$ the flux has a second derivative which is not Lipschitz-continuous with respect to changes in ∇H . Because equations (27) already involve differentiating \mathbf{q} , in the limit where the control volume shrinks to zero, the behavior of second derivatives of \mathbf{q} determines the smoothness of J and thus the convergence of the solver. Nonsmoothness is best seen in one dimension where equation (2) is

$$q(H, H') = -\Gamma H^{n+2} |H' + b'|^{n-1} (H' + b'). \quad (36)$$

When $n > 1$,

$$\frac{\partial^2 q}{\partial H'^2} = -CH^{n+2} |H' + b'|^{n-3} (H' + b') \quad (37)$$

for $C > 0$. If $n = 2$, for example, this function undergoes a step at $H' = -b'$, and thus is not Lipschitz. In fact, (37) is not Lipschitz-continuous for $1 < n < 3$.

Because we want methods that work for all exponents $n \geq 1$, we regularize by replacing

$$|\nabla s| \rightarrow (|\nabla s|^2 + \delta^2)^{1/2}, \quad (38)$$

with $\delta = 10^{-4}$, in computing \mathbf{q} and its derivatives. This regularization, which makes little difference when the surface slope is of order 10^{-3} or larger, is similar to that used in regularizing the viscosity in the Stokes equations (Greve and Blatter, 2009), and other distributed stress balance models (Brown and others, 2013; Bueler and Brown, 2009, for example).

A Newton solver requires an initial iterate $H^{(0)}$. We generate it by a heuristic which seems to work adequately-well for both ice sheet- and glacier-scale problems, and which is suggested by Jouvett and Gräser (2013) in a time-stepping context. From the

steady surface mass balance data $m_{j,k}$, in meters per year, we compute

$$H_{j,k}^{(0)} = \max \{0, 1000 m_{j,k}\}, \quad (39)$$

which builds the initial thickness simply by piling-up one thousand years of accumulation.

Additionally we apply a simple “parameter continuation” scheme, to aid in the convergence of the Newton iteration on our degenerate, nonlinear free-boundary problem. We first apply the Newton method to an easier free-boundary problem, one with constant diffusivity. Then we adjust a continuation parameter ϵ until we are solving the full SIA free-boundary problem. Specifically, for $0 \leq \epsilon \leq 1$ we define

$$n(\epsilon) = (1-\epsilon)n + \epsilon n_0 \text{ and } D(\epsilon) = (1-\epsilon)D + \epsilon D_0 \quad (40)$$

where n is the original exponent, D is computed in (3), $n_0 = 1$, and D_0 is a typical scale of diffusivities for the problem (e.g. $D_0 = 0.01 \text{ m}^2 \text{ s}^{-1}$ for a glacier problem or $D_0 = 10 \text{ m}^2 \text{ s}^{-1}$ for an ice sheet). Note $n(1) = n_0$ and $D(1) = D_0$ while $n(0) = n$ and $D(0) = D$. We then consecutively solve free-boundary problems corresponding to thirteen values of ϵ :

$$\epsilon_i = \begin{cases} (0.1)^{i/3}, & \text{for } i = 0, \dots, 11, \\ 0, & i = 12, \end{cases} \quad (41)$$

so that, until the last stage $\epsilon_{12} = 0$, the parameter ϵ_i is reduced by an order of magnitude as i increases by three.

We start with $\epsilon_0 = 1$ so we are solving (34) with values $n = n_0$ and $D = D_0$ and initial iterate $H^{(0)}$ from (39). Once this first stage converges, the ice margin has moved from the equilibrium line—the margin of initial iterate (39)—into the ablation zone as expected. The solution is then used as the initial iterate for problem (34) with the second value $\epsilon_1 = (0.1)^{1/3} \approx 0.46$ in (40). Continuing in this way we eventually solve the unregularized $n(0) = n$ and $D(0) = D$ problem. The first twelve stages $\epsilon_0, \dots, \epsilon_{11}$ generate a high-quality initial iterate for the un-modified SIA calculation ($\epsilon_{12} = 0$).

Time-stepping

The relationship between our steady-state computations and fully-implicit time-stepping methods for equation (1) deserves examination. We will be able to exploit such time-steps to make the Newton solver for the steady-state problem more robust for rough-bed cases.

The backward-Euler (Morton and Mayers, 2005) approximation of equation (1) is

$$\frac{H^\ell - H^{\ell-1}}{\Delta t} + \nabla \cdot \mathbf{q}^\ell = m \quad (42)$$

where $H^\ell(x, y) \approx H(t_\ell, x, y)$ is the unknown thickness, $H^{\ell-1}$ is known from the previous time-step, and \mathbf{q}^ℓ is the flux computed using H^ℓ . Our

methods extend easily from solving (34) to solving (42), subject as before to the constraint $H^\ell \geq 0$.

Observe that by solving for steady state we effectively take infinite-duration implicit time steps in (42). For finite Δt , solving problem (42) is easier than the steady-state problem because the initial iterate can be taken to be the solution at the previous time step, and because the continuation sequence can either be avoided entirely or truncated to only include small ϵ values. More important than that, however, is the key fact that solving (42) gets easier as $\Delta t \rightarrow 0$, because the Jacobian J has a more-dominant diagonal due to the $H^\ell/\Delta t$ term in (42).

If a Newton iteration fails to converge in the steady-state case, we might hope that it would still converge for (42) using finite Δt . This is what we see in practice. As we see in the next section, switching from the steady state problem to long (e.g. 0.1 to 100 year depending on resolution) backward-Euler time steps is a “recovery strategy” for dealing with Newton solver difficulties when dealing with highly-irregular bed topography data in the steady state problem.

RESULTS

We first apply our method in two examples where exact solutions are known, comparing performance of the M^\star and classical Mahaffy schemes. We use the exact solutions to evaluate the convergence of the discrete solution to the continuum solution under grid refinement (verification), and we evaluate the convergence of the continuation scheme and Newton iteration in these cases. After that we apply the method to high-resolution Greenland ice sheet bedrock topography. All computations in this section use physical parameters from EISMINT I (Huybrechts and others, 1996) and are in two horizontal variables, though we show verification results along flow lines for clarity.

Verification cases

An angularly-symmetric steady-state exact solution exists in the flat bed case (Bueler, 2003; van der Veen, 2013). This “dome” exact solution, with parameters suitable for a medium-sized ice sheet, is shown in Figure 5. The numerical results from our M^\star method are very close to the exact solution, with numerical error at the last positive-thickness grid point barely-visible.

Figure 5 also suggests that, because of unbounded gradient at the margin, thickness errors decay slowly under grid refinement (Bueler and others, 2005). Thus we measure the maximum and average thickness errors from both classical Mahaffy and M^\star methods in Figure 6. Both methods show expected slow convergence of maximum error. The decay of the average error for M^\star , to about 1 m

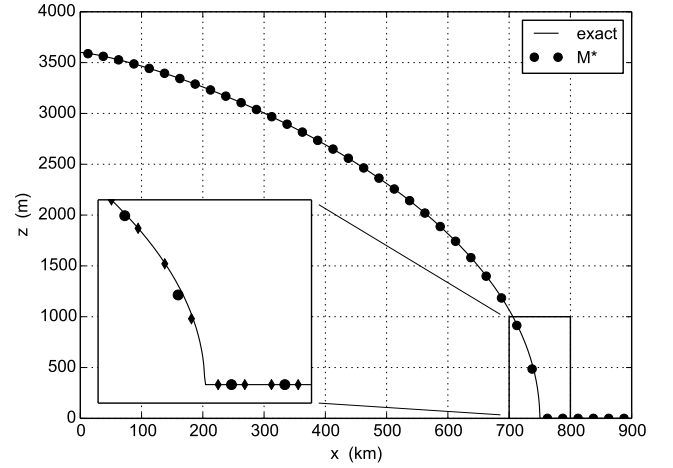


Fig. 5. Result from M^\star method on a $\Delta x = \Delta y = 25$ km grid (dots) compared to the dome exact solution. The detail of the margin adds results from a 12.5 km grid (diamonds).

for the three finest grids, is better than for classical Mahaffy. However, because of unbounded gradient at the margin, the measured M^\star decay rate of $O(\Delta x^{1.47})$ is less good than the theoretical $O(\Delta x^2)$ convergence rate expected from both methods.

Improved convergence of the Newton iteration for the M^\star scheme, which differs from the classical scheme only by improved quadrature in this flat bed case, is seen in all cases. As indicated in the figure by gray circles, the classical Mahaffy scheme fails to converge for all grids except the coarsest. Though the M^\star method fails to converge at the $\epsilon_{12} = 0$ stage on the two finest grids, these cases fully-converge if the problem is changed to a backward Euler step (42) of duration 100.0 years (not shown).

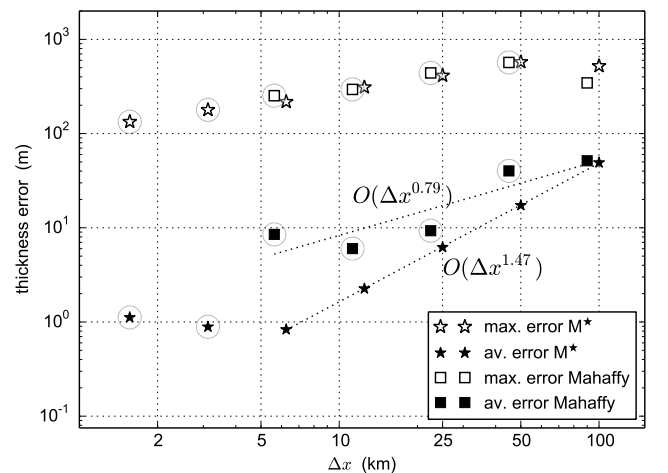


Fig. 6. Average and maximum error under grid refinement using the dome exact solution, for the M^\star (stars) and classical Mahaffy (squares) methods. Gray circles indicate runs where the Newton method diverged before the last $\epsilon_{12} = 0$ stage of continuation sequence (41).

Figure 7 shows clear evidence of quadratic, or at least superlinear, convergence from the

Newton solver, in runs where the relative tolerance (i.e. residual 2-norm reduction factor) is 10^{-10} . That is, at each stage ϵ_i of the continuation scheme, the computed residual shows the characteristic curved drop on such semi-log axes (Kelley, 2003).

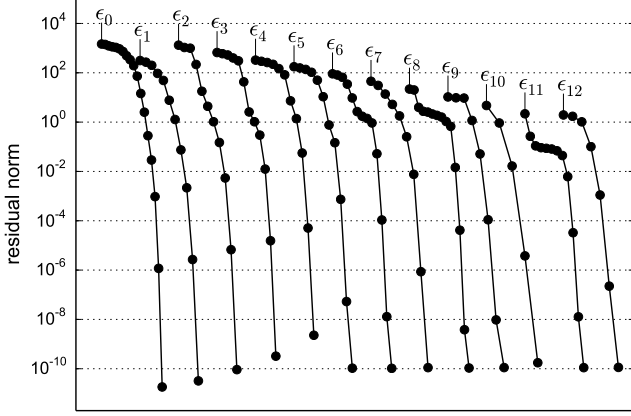


Fig. 7. Residual norm versus iteration number for each continuation stage. The SIA problem itself is the last $\epsilon_{12} = 0$ curve.

To test performance on non-flat and non-smooth beds, we use a glacier-scale bedrock-step exact solution by Jarosch and others (2013). As shown in Figure 8, the exact thickness is discontinuous at the cliff, because the thickness goes to zero on the uphill side and has a nonzero value on the downhill side. Note that our computation uses two horizontal dimensions but is constant in the y -direction. The Figure shows results from M^\star calculations without upwinding (i.e. $\lambda = 0$ in formula (31); “ M^\star_{no} ”) and using the maximum upwind that does not expand the stencil ($\lambda = 1$; “ M^\star_{full} ”). These results explain why we have chosen $\lambda = 1/4$. In fact, for $\lambda = 0$ there are large errors on the downhill side of the cliff, while for $\lambda = 1$ the uphill thickness is too large. Just a bit of upwinding captures the flux at the cliff so that both uphill and downhill thicknesses are good.

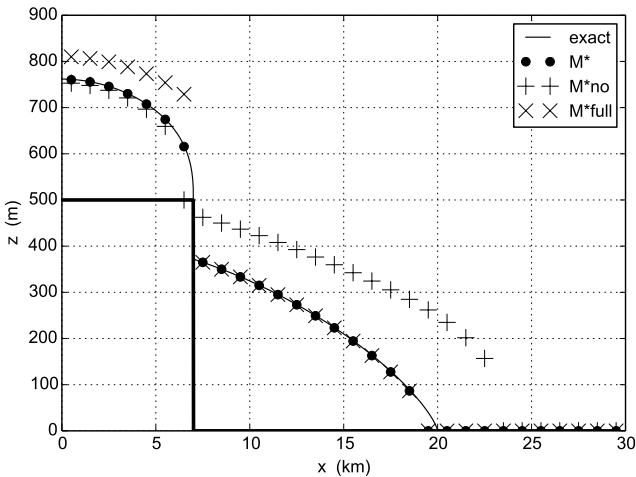


Fig. 8. Results from M^\star method, and its upwinding variations, compared to the bedrock-step exact solution ($\Delta x = 1000$ m).

To compare to results in (Jarosch and others, 2013), we applied the M^\star method on grids with $\Delta x = \Delta y = 1000, 500, 250, 125$ m. When we measure maximum thickness errors, there is *no* evidence of convergence as the grid is refined, and for average thickness errors the evidence of convergence is unconvincing (not shown). However, maximum errors are not expected to decay because even an interpolant of the discontinuous exact solution will not exhibit maximum norm convergence. The theory of FE methods also does not suggest convergence in average error, because of the extremely-low regularity of the exact solution (Elman and others, 2005). However, error norms are not reported by Jarosch and others (2013), so we cannot compare.

Like Jarosch and others (2013) we can examine relative volume error, a weak quality measure, in addition to the visual evidence from Figure 8. Table 1 shows the value

$$100 \frac{V_{\text{numerical}} - V_{\text{exact}}}{V_{\text{exact}}}. \quad (43)$$

The second, third, and fourth columns are from the same three versions of the M^\star method shown in Figure 8. Again we see why $\lambda = 1/4$ is preferred to the upwinding alternatives. The last two columns of Table 1 show the results reported by Jarosch and others (2013) for their best “Superbee”-limited MUSCL scheme and for their implementation of the classical Mahaffy scheme (“M2”). Thus we see that results from our implicit, first-order-upwinding M^\star scheme are highly-satisfactory in this case.

Table 1. Relative volume differences (43) on the bedrock-step exact solution. “ M^\star ” columns show three upwinding variations (see text). “NC” indicates a Newton-iteration convergence failure. “Superbee” and “M2” columns are from Jarosch and others (2013).

Δx (m)	M^\star	M^\star_{no}	M^\star_{full}	Superbee	M2
1000	-1.205	49.067	9.217	-7.588	116.912
500	0.373	60.826	10.423	-5.075	132.095
250	1.220	NC	11.104	-3.401	139.384
125	1.621	NC	11.424	-2.579	142.997

Greenland: bed topography and robustness

While we have demonstrated its effectiveness on verification cases, the method’s success ultimately depends on robust convergence when the data of the problem, especially the bed topography b , are realistically non-smooth. To test robustness, and scalability to high-resolution, we use two Greenland ice sheet bed topography data sets of different smoothness. We see that runs at high resolution (600–2000 m) converge only imperfectly on the rougher beds, but that implicit time-steps can be used to get arbitrarily-close to steady-state in such cases.

The smoother and older BEDMAP1 bed data is on a 5 km grid (Bamber and others, 2001); we call it “BM1”. Along with a gridded model for present-day surface mass balance (Ettema and others, 2009), which all of our experiments use, it is included in the SeaRISE data (Bindshadler and twenty-seven others, 2013). The newer, finer-resolution, and rougher bed data are on a 150 m grid from Morlighem and others (2014). This data set, which we call “MCB,” is generated by mass-conservation methods using both surface velocity measurements and a larger collection of ice-penetrating radar flightlines than went into BM1.

Considering the BM1 bed first, we solved the problem on 5000, 2500, 1667, 1250, 1000, and 625 meter grids. In the sub-5 km cases we refined the data using bilinear interpolation, and thus the bed became smoother under grid refinement. Figure 9 shows that, though the Newton solver does not converge at the final $\epsilon_{12} = 0$ level, the next-best level ϵ_{11} is reached by the continuation scheme using the RS solver (see below) on all of the finer (< 2000 m) grids.

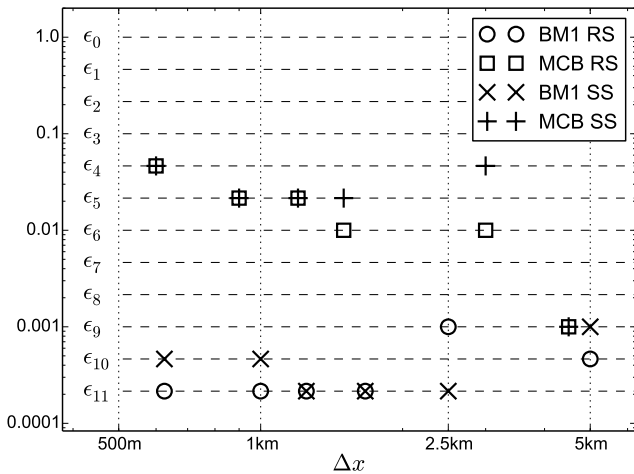


Fig. 9. Smallest successful value of ϵ_i for which the Newton iteration converges on the steady-state problem; lower is better. Different bed data sources (BM1 or MCB) and complementarity-problem solvers (RS or SS) are compared.

The runs using the MCB data were on 4500, 3000, 1500, 1200, 900, and 600 meter grids. The bed elevations were averaged, on 30×30 blocks for the 9 km grid down to 4×4 blocks for the 600 m grid, from the original 150 m postings. Because this process reveals more and more detail, the bed effectively became rougher under grid refinement. Except on the coarsest and most-averaged grid, the continuation scheme fails to generate convergent Newton solves beyond the middle stages (ϵ_4 – ϵ_6). Thus it is clear that highly-resolved bed, which causes large and irregular values of D and \mathbf{W} to arise from formulas (3) and (7), limits the success of our combined continuation scheme and Newton iteration.

Though theoretical guidance on the choice of a solver for complementarity problems is, to our knowledge, lacking in this context, these Greenland cases are realistic and challenging ones on which to compare the two available methods for solving (34). From Figure 9 it is clear that the convergence of the reduced-space (“RS”) and semi-smooth (“SS”) methods is comparable, with the RS method slightly-better in the high-resolution cases. However, because the SS method is also three times slower on average over all runs in Figure 9, from now on we use only the RS solver.

Based on these initial experiments we implemented the following strategy for computing the steady-state solution using the MCB bed data averaged onto a 900 m grid: Generate five smoothed versions of the bed data, with successively greater averaging before interpolating to the same 900 m grid; the least-smoothed of these data is the simple average of 6×6 blocks of the original 150 m data. At the first stage, compute the steady state using the most-smoothed version of the bed data, for which we expect convergence to a “good” level (e.g. ϵ_{10} – ϵ_{12} as in Figure 9). Extract the surface elevation from the result and construct a new initial thickness from it using the next less-smoothed version of the bed data. Though the steady-state continuation/Newton scheme will not converge from this new initial thickness, as convergence is quite insensitive to initial iterate but is blocked by bed roughness (Figure 9), one can expect a backward Euler time step (42) to converge. Thus we start time-stepping. These implicit time steps are chosen sufficiently-short so that the continuation scheme fully converges (i.e. to the ϵ_{12} level), and thus we further approach steady state on the better bed. Iterate this bed-resolving strategy through the stages until using the least-smoothed bed, i.e. the fully-resolved bed on the 900 m grid. Continue time-stepping so as to approach steady-state as closely as desired.

The result of this strategy is shown in Figure 10. The first step was a nearly-converged steady-state computation (ϵ_{11} level) on the most-smoothed bed. Then the five-step bed-resolving process in the last paragraph was applied, using very short ($\sim 10^{-3}$ a) backward Euler time steps. Then 50 model years of additional backward Euler time steps were run, with one-month time steps (0.1 a) for the last 20 years. The result in Figure 10 has modeled volume $3.48 \times 10^6 \text{ km}^3$ compared to observed value $2.95 \times 10^6 \text{ km}^3$. The average absolute thickness error of 139 m is dominated by large errors from mislocating the ice margin in fjord-like coastal areas. Though the average diffusivity over the whole ice sheet was small ($D \approx 0.5 \text{ m}^2 \text{ s}^{-1}$), maximum values of $D \approx 6 \times 10^3 \text{ m}^2 \text{ s}^{-1}$ occurred in the interiors of highly-resolved outlet glaciers.

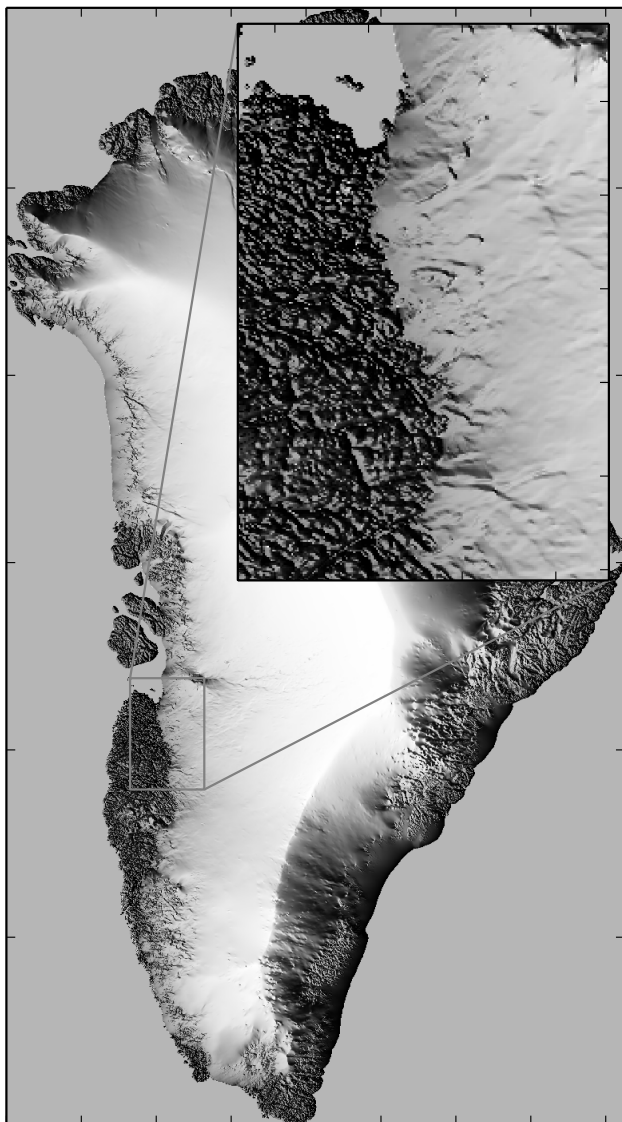


Fig. 10. Computed high-resolution ice sheet surface. The free boundary (margin) is determined only by the surface mass balance, bedrock topography, and the steady-state, simplified-dynamics SIA model. We use 900 m model resolution and the MCB bed topography data.

DISCUSSION AND CONCLUSION

The problem solved in this paper is fundamentally different from most prior ice sheet modeling. We compute the steady-state geometry and extent of an ice sheet directly as a function of only two data sets, namely the bed topography and surface mass balance. Though this function has not been proved to be well-defined, even in the elevation-independent surface mass balance cases here (compare Jouvét and others, 2011) there is theoretical support for well-posedness (Jouvét and Bueler, 2012) and nothing seen in our calculations suggests otherwise. Although shallow “hybrid” models are capable of very-high-quality match to the observations (Aschwanden and others, 2015), we do not claim that the model here, an untuned isothermal SIA model using EISMINT I parameter

values, is sufficiently-complete to represent the important physics of the Greenland ice sheet.

Our numerical methods are based on new and old ideas. The numerical discretization of the SIA mass conservation equation is based on a classical structured-grid FD scheme (Mahaffy, 1976). We make two improvements, based on re-interpreting the classical scheme as an FVE method, namely

- (i) improved quadrature in the flux integral, and
- (ii) a small amount of first-order upwinding for the part of the ice flux which is proportional to the bed gradient,

to create the new M^\star scheme. Then, because the constraint of nonnegative thickness makes this a free-boundary problem, we put it in complementarity form and apply a parallel Newton solver designed for such problems.

The M^\star method is both more accurate than, and gives substantially-better Newton iteration convergence than, the classical scheme, as shown in verification cases. We also show that the method can succeed at large scale and high resolution on real, highly-irregular ice sheet bed elevation data. Compared to the steady-state Greenland calculation by Jouvét and Bueler (2012), we have increased the number of unknowns by more than an order of magnitude, replaced a fixed-point iteration by a direct application of the Newton method, and shown how to work with more realistic data.

Convergence of the Newton iteration in the presence of finely-resolved, and thus very rough, bed is not guaranteed. The highly-variable values of diffusivity D from the result in Figure 10 (not shown) apparently forms part of the barrier to full convergence of the continuation/Newton scheme for such steady-state computations. The convergence of longer time steps on rough beds is also limited, but this was not studied quantitatively. A complete and/or precise understanding of the failure of convergence of the Newton iteration on rough beds is a topic for further research.

Though we have not tested this extension, the M^\star ideas can be extended to unstructured dual Delaunay/Voronoi meshes such as those used by Egholm and Nielsen (2010) and the MPAS Land Ice model (COSIM Team, 2013; Ringler and others, 2013). These models use P^1 finite elements on a Delaunay triangulation and flux-integral quadrature on the Voronoi-cell edges. The improved quadrature idea (i) above would split the cell edges where the element (i.e. triangle) boundaries cross them, while the upwinding idea (ii) would require interpretation as first-order reconstruction after advection. Such a method would improve on that of Egholm and Nielsen (2010), in particular, by exploiting an underlying P^1 element flux

approximation, instead of using a highly-averaging and stencil-expanding least squares method.

The most important extension of our work, however, depends on noticing that it is actually rather flux-agnostic. In particular, the steady-state mass conservation equation (8) or (9) also applies as stated with any Stokes (Greve and Blatter, 2009), “higher-order” (Pattyn and twenty others, 2008), or hybrid membrane-stress-resolving (Winkelmann and others, 2011) model which computes the ice sheet geometry. In such models the computation of the discrete flux \mathbf{q}^h from the approximate ice sheet thickness H^h is completely different from the direct differentiation done in the SIA, as it involves solving an elliptic-type stress balance model. For structured-grid models, however, the same basic FVE method (27)–(29) sets up the discrete equations. Then the problem becomes a version of complementarity problem (34), as ice thickness is nonnegative regardless of the model for its stresses. Thereby one is faced with a free-boundary problem for the steady-state ice sheet geometry. An adapted Newton solver is the natural choice to solve such problems, wherein the residual evaluation includes the computation of \mathbf{q}^h from the current H^h . While the roughness of the bed is also a difficulty in solving such “higher-order” stress-balance problems (Brown and others, 2013), the spatial integration used in all membrane-stress or full-stress resolving models should actually smooth the residual function seen by the Newton solver. To our knowledge, however, direct solution of steady-state equation (8) has not been attempted for other than SIA fluxes. Clearly, these are topics for further research.

ACKNOWLEDGEMENTS

This work was supported by NASA grant #NNX13AM16G and a grant of high-performance computing resources from the Arctic Region Supercomputing Center. Thanks to Barry Smith of Argonne National Laboratory for key maintenance on the solvers.

REFERENCES

- Aschwanden A, Fahnestock MA and Truffer M (2015) Complex Greenland outlet glacier flow captured, submitted
- Balay S and others (2014) PETSc Users Manual–revision 3.5. Technical Report ANL-95/11, Argonne National Laboratory
- Bamber J, Layberry R and Gogenini S (2001) A new ice thickness and bed data set for the Greenland Ice Sheet 1: Measurement, data reduction, and errors. *J. Geophys. Res.*, **106**(D24), 33773–33780
- Benson S and Munson T (2006) Flexible complementarity solvers for large-scale applications. *Optimization Methods and Software*, **21**(1), 155–168
- Bindschadler R and others (2013) Ice-sheet model sensitivities to environmental forcing and their use in projecting future sea-level (The SeaRISE Project). *J. Glaciol.*, **59**(214), 195–224
- Briggs W, Henson VE and McCormick S (2000) *A Multigrid Tutorial*. SIAM Press, 2nd edition
- Brown J, Smith B and Ahmadi A (2013) Achieving textbook multigrid efficiency for hydrostatic ice sheet flow. *SIAM J. Sci. Comput.*, **35**(2), B359–B375 (doi: 10.1137/110834512)
- Bueler E (2003) Construction of steady state solutions for isothermal shallow ice sheets. Dept. of Mathematical Sciences Tech. Rep. 03-02, University of Alaska, Fairbanks
- Bueler E and Brown J (2009) Shallow shelf approximation as a “sliding law” in a thermodynamically coupled ice sheet model. *J. Geophys. Res.*, **114**, f03008, doi:10.1029/2008JF001179
- Bueler E, Lingle CS, Kallen-Brown JA, Covey DN and Bowman LN (2005) Exact solutions and numerical verification for isothermal ice sheets. *J. Glaciol.*, **51**(173), 291–306
- Cai Z (1990) On the finite volume element method. *Numerische Mathematik*, **58**(1), 713–735 (doi: 10.1007/BF01385651)
- Calvo N, Durany J and Vázquez C (2000) Numerical computation of ice sheet profiles with free boundary models. *Appl. Numer. Math.*, **35**(2), 111–128 (doi: http://dx.doi.org/10.1016/S0168-9274(99)00052-5)
- Calvo N, Díaz J, Durany J, Schiavi E and Vázquez C (2002) On a doubly nonlinear parabolic obstacle problem modelling ice sheet dynamics. *SIAM J. Appl. Math.*, **63**(2), 683–707 (doi: 10.1137/S0036139901385345)
- Ciarlet PG (2002) *The Finite Element Method for Elliptic Problems*. SIAM Press, reprint of the 1978 original
- COSIM Team (2013) MPAS-Land Ice Model Users Guide version 3.0, Los Alamos National Laboratory, <http://mpas-dev.github.io/>
- Curtis A, Powell MJ and Reid JK (1974) On the estimation of sparse jacobian matrices. *J. Inst. Math. Appl.*, **13**(1), 117–120
- Egholm D and Nielsen S (2010) An adaptive finite volume solver for ice sheets and glaciers. *J. Geophys. Res.: Earth Surface*, **115**(F1) (doi: 10.1029/2009JF001394)
- Elman HC, Silvester DJ and Wathen AJ (2005) *Finite Elements and Fast Iterative Solvers: with Applications in Incompressible Fluid Dynamics*. Oxford University Press
- Ettema J, van den Broeke M, van Meigaard E, van de Berg W, Bamber J, Box J and Bales R (2009) Higher surface mass balance of the Greenland ice sheet revealed by high-resolution climate modeling. *Geophys. Res. Lett.*, **36**(L12501) (doi: 10.1029/2009GL038110)
- Ewing RE, Lin T and Lin Y (2002) On the accuracy of the finite volume element method based on piecewise linear polynomials. *SIAM J. Num. Analysis*, **39**(6), 1865–1888
- Fowler AC (1997) *Mathematical Models in the Applied Sciences*. Cambridge Univ. Press
- Greve R and Blatter H (2009) *Dynamics of Ice Sheets and Glaciers*. Advances in Geophysical and Environmental Mechanics and Mathematics, Springer
- Hindmarsh RCA and Payne AJ (1996) Time-step limits for stable solutions of the ice-sheet equation. *Ann. Glaciol.*, **23**, 74–85
- Hindmarsh RCA, Morland LW, Boulton GS and Hutter K (1987) The unsteady plane flow of ice-sheets: A parabolic problem with two moving boundaries. *Geophysical & Astrophysical Fluid Dynamics*, **39**(3), 183–225 (doi: 10.1080/03091928708208812)
- Hutter K (1983) *Theoretical Glaciology*. D. Reidel
- Huybrechts P and others (1996) The EISMINT benchmarks for testing ice-sheet models. *Ann. Glaciol.*, **23**, 1–12
- Jarosch AH, Schoof CG and Anslow FS (2013) Restoring mass conservation to shallow ice flow models over complex terrain. *The Cryosphere*, **7**(1), 229–240 (doi: 10.5194/tc-7-229-2013)
- Jouvet G and Bueler E (2012) Steady, shallow ice sheets as obstacle problems: well-posedness and finite element approximation. *SIAM J. Appl. Math.*, **72**(4), 1292–1314 (doi: 10.1137/110856654)

- Jouvet G and Gräser C (2013) An adaptive newton multigrid method for a model of marine ice sheets. *J. Comput. Phys.*, **252**, 419–437 (doi: 10.1016/j.jcp.2013.06.032)
- Jouvet G, Rappaz J, Bueler E and Blatter H (2011) Existence and stability of steady state solutions of the shallow ice sheet equation by an energy minimization approach. *J. Glaciol.*, **57**(202), 345–354
- Kelley C (2003) *Solving Nonlinear Equations with Newton's Method*. SIAM Press
- Kinderlehrer D and Stampacchia G (1980) *An Introduction to Variational Inequalities and their Applications*. Pure and Applied Mathematics, Academic Press
- LeVeque RJ (2002) *Finite Volume Methods for Hyperbolic Problems*. Cambridge Texts in Applied Mathematics, Cambridge University Press
- Mahaffy MW (1976) A three-dimensional numerical model of ice sheets: tests on the Barnes Ice Cap, Northwest Territories. *J. Geophys. Res.*, **81**(6), 1059–1066
- Morlighem M, Rignot E, Mouginot J, Seroussi H and Larour E (2014) Deeply incised submarine glacial valleys beneath the Greenland Ice Sheet. *Nat. Geosci.*, **7**, 418–422 (doi: 10.1038/ngeo2167)
- Morton KW and Mayers DF (2005) *Numerical Solutions of Partial Differential Equations: An Introduction*. Cambridge University Press, 2nd edition
- Pattyn F and others (2008) Benchmark experiments for higher-order and full Stokes ice sheet models (ISMIP-HOM). *The Cryosphere*, **2**, 95–108
- Ringler T, Petersen M, Higdon R, Jacobsen D, Jones P and Maltrud M (2013) A multi-resolution approach to global ocean modeling. *Ocean Modelling*, **69**, 211–232
- Smith B, Bjorstad P and Gropp W (1996) *Domain decomposition: parallel multilevel methods for elliptic partial differential equations*. Cambridge University Press
- Strang G (1972) Variational crimes in the finite element method. In *The Mathematical Foundations of the Finite Element Method with Applications to Partial Differential Equations*, 689–710, Academic Press
- van der Veen CJ (2013) *Fundamentals of Glacier Dynamics*. CRC Press, 2nd edition
- Winkelmann R, Martin MA, Haseloff M, Albrecht T, Bueler E, Khroulev C and Levermann A (2011) The Potsdam Parallel Ice Sheet Model (PISM-PIK) Part 1: Model description. *The Cryosphere*, **5**, 715–726

APPENDIX. ANALYTICAL JACOBIAN

To sketch the calculation of the analytical Jacobian for the M^\star method, we first recall that each (32) comes from equation (27),

$$F_{j,k} = \sum_{s=0}^7 \mathbf{c}_s \cdot \mathbf{q}^h(x_j^s, y_k^s) - m_{j,k} \Delta x \Delta y. \quad (\text{A1})$$

As the stencil of the M^\star scheme is the nine-node box shown in Figure 1b, each row of the Jacobian has nine nonzero entries corresponding to locations p, q where $F_{j,k}$ depends on $H_{p,q}$.

We compute

$$\frac{\partial F_{j,k}}{\partial H_{p,q}} = \sum_{s=0}^7 \mathbf{c}_s \cdot \frac{\partial \mathbf{q}^h(x_j^s, y_k^s)}{\partial H_{p,q}}, \quad (\text{A2})$$

noting that $\partial \mathbf{q}^h(x_j^s, y_k^s) / \partial H_{p,q}$ is nonzero only if $H_{p,q}$ is one of the four nodal values on the element

$\square_{u,v}$ containing the quadrature point (x_j^s, y_k^s) . Using index $\ell = 0, 1, 2, 3$ for the corners of rectangle $\square_{u,v}$, we need to write code to compute

$$\mathbf{Q}_\ell^s = \frac{\partial \mathbf{q}^h(x_j^s, y_k^s)}{\partial H_\ell} \quad (\text{A3})$$

when (x_j^s, y_k^s) is in $\square_{u,v}$.

Derivatives are easiest to compute, in a Q^1 FE method, using local coordinates $\xi = (x - x_u) / \Delta x$ and $\eta = (y - y_v) / \Delta y$ on $\square_{u,v}$, so that $0 \leq \xi, \eta \leq 1$. Bilinear interpolation defines a function $H_{u,v} = H_{u,v}(\xi, \eta)$ on $\square_{u,v}$ from interpolation of the four nodal values H_ℓ , and bed elevation function $b_{u,v}$ is similarly-defined. Differentiation with respect to ξ and η gives vector-valued functions $(\nabla H)_{u,v}$ and $(\nabla b)_{u,v}$. Differentiation with respect to H_ℓ gives the scalar function $\partial H_{u,v} / \partial H_\ell$ and vector-valued function $\partial(\nabla H)_{u,v} / \partial H_\ell$. We write code for each of these (ξ, η) -dependent functions on $\square_{u,v}$. Then we write code to compute functions $D_{u,v}$ and $\partial D_{u,v} / \partial H_\ell$ from (3), and then $\mathbf{W}_{u,v}$ and $\partial \mathbf{W}_{u,v} / \partial H_\ell$ from (7), in local coordinates ξ, η on $\square_{u,v}$.

Denote local coordinates of the quadrature point (x_j^s, y_k^s) on element $\square_{u,v}$ by $\xi^s = (x_j^s - x_u) / \Delta x$ and $\eta^s = (y_k^s - y_v) / \Delta y$. Note that for each quadrature point, as in Figure 4, upwinding determines an additional evaluation point, whose local coordinates are denoted $(\xi_{\text{up}}^s, \eta_{\text{up}}^s)$.

In these terms, from (6), for the evaluation of the residual (A1) we write code to compute

$$\mathbf{q}^h(x_j^s, y_k^s) = -D_{u,v}(\xi^s, \eta^s) (\nabla H)_{u,v}(\xi^s, \eta^s) + \mathbf{W}_{u,v}(\xi^s, \eta^s) H_{u,v}(\xi_{\text{up}}^s, \eta_{\text{up}}^s)^{n+2}. \quad (\text{A4})$$

For the evaluation of the Jacobian entries (A2) we write code to compute

$$\begin{aligned} \mathbf{Q}_\ell^s = & -\frac{\partial D_{u,v}}{\partial H_\ell}(\xi^s, \eta^s) (\nabla H)_{u,v}(\xi^s, \eta^s) \\ & - D_{u,v}(\xi^s, \eta^s) \frac{\partial(\nabla H)_{u,v}}{\partial H_\ell}(\xi^s, \eta^s) \\ & + \frac{\partial \mathbf{W}_{u,v}}{\partial H_\ell}(\xi^s, \eta^s) H_{u,v}(\xi_{\text{up}}^s, \eta_{\text{up}}^s)^{n+2} \\ & + (n+2) \mathbf{W}_{u,v}(\xi^s, \eta^s) H_{u,v}(\xi_{\text{up}}^s, \eta_{\text{up}}^s)^{n+1} \\ & \cdot \frac{\partial(\nabla H)_{u,v}}{\partial H_\ell}(\xi_{\text{up}}^s, \eta_{\text{up}}^s). \end{aligned} \quad (\text{A5})$$