

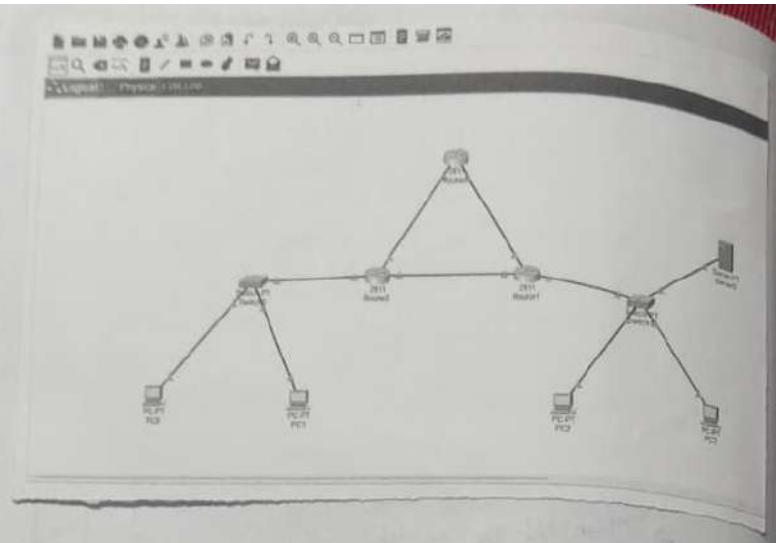


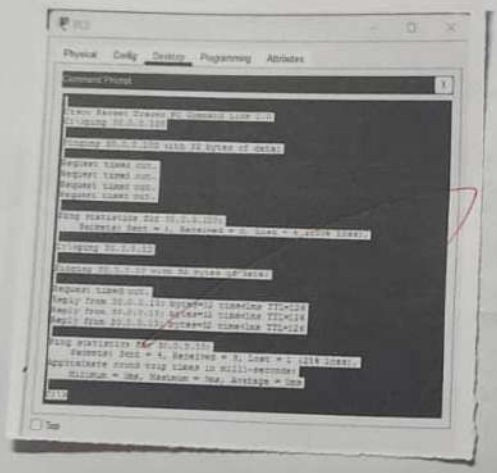

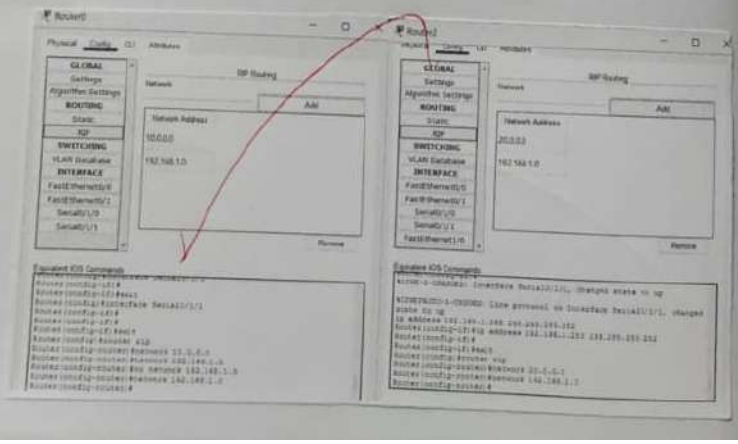

Date: 11

Examine network Address translation (NAT) using Cisco Packet Tracer

Aim:

To Configure and examine network address Translation (NAT) using Cisco packet tracer and verify Communication between a Private network and a Public network

Procedure:

→ Open Cisco packet tracer
→ Add one router, One Switch, one PC, and one server
→ Connect the device using Copper Straight through Cables.
→ Configure the routers inside interface with IP address 192.168.1.1 and Outside interface with IP address 200.1.1.1
→ Enable NAT on the inside and Outside interfaces.
→ Configure static NAT to map inside IP 192.168.1.2 to Public IP 200.1.1.100.
→ On the router CLI, execute show ip nat translations to verify the NAT translation

Result:

Thus, network Address translation (NAT) was Configured Successfully using Cisco Packet tracer, and Communication between the Private and network was tested.