clk_i, rst_i reach every block

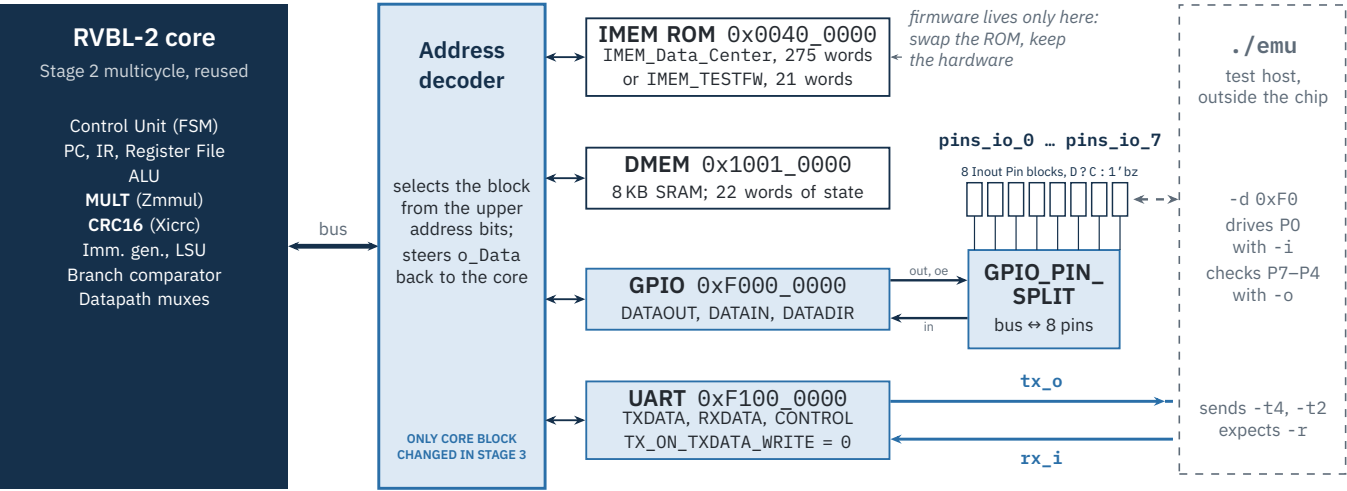

new or changed in Stage 3 · existing block · external test host

Only the decoder knows the memory map; GPIO and UART decode bits 11:2.