

VALEN JONATHAN MICELIANO PASARIBU

103072400072


Analisis Ethernet Frame

1.1 Capture Traffic di Wireshark

Pada bagian ini dilakukan capture paket saat mengakses sebuah halaman web menggunakan Wireshark. Tujuannya adalah mengamati frame Ethernet yang membawa data HTTP (khususnya HTTP GET request).


Wireshark dijalankan terlebih dahulu sebelum membuka URL berikut:

<http://gaia.cs.umass.edu/wireshark-labs/HTTP-wireshark-lab-file3.html>

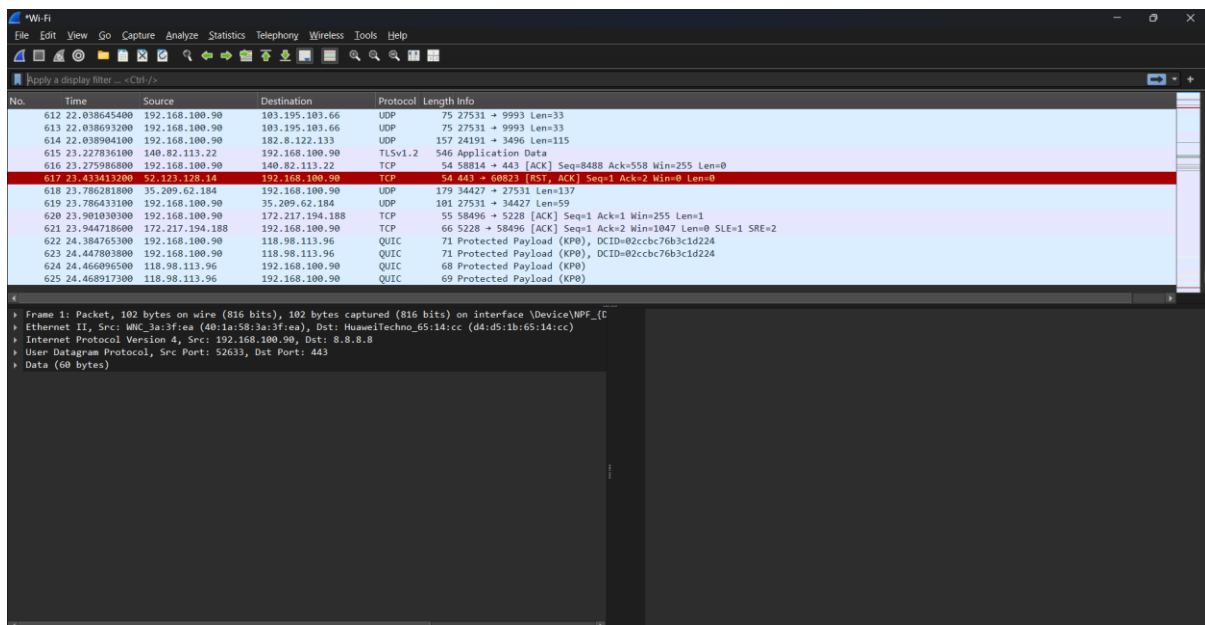


1.2 HTTP GET Request

Lalu filter paket HTTP GET yang dikirim dari komputer ke server.

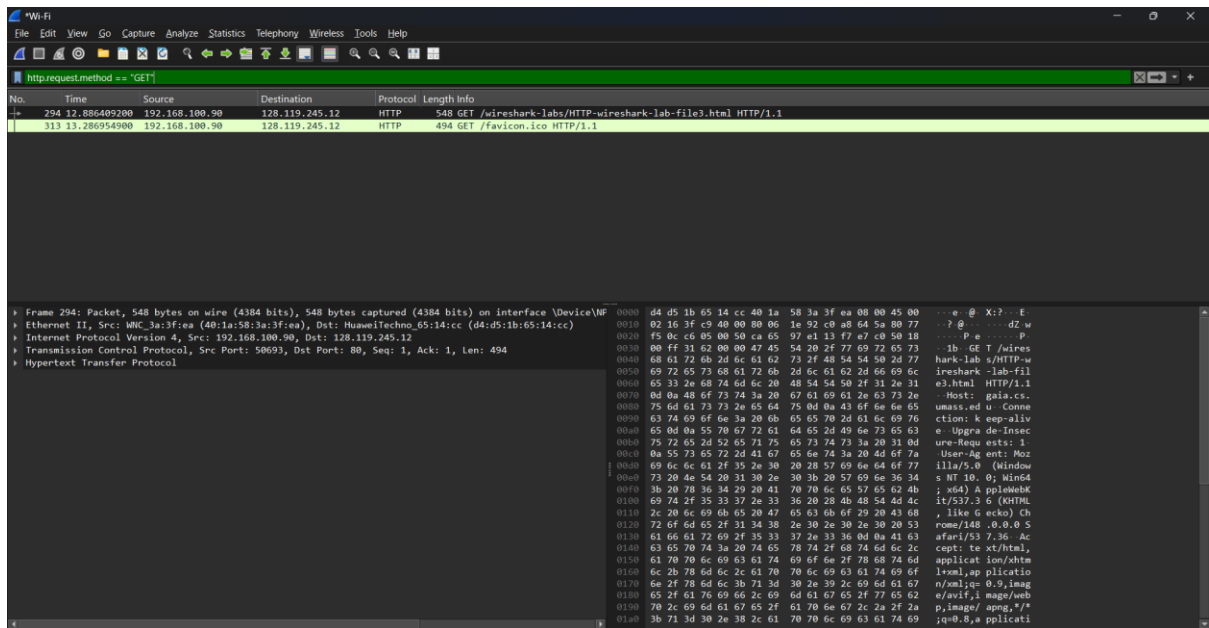


1.3 Detail Ethernet Frame


Cari detail MAC address dari pengirim dan penerima

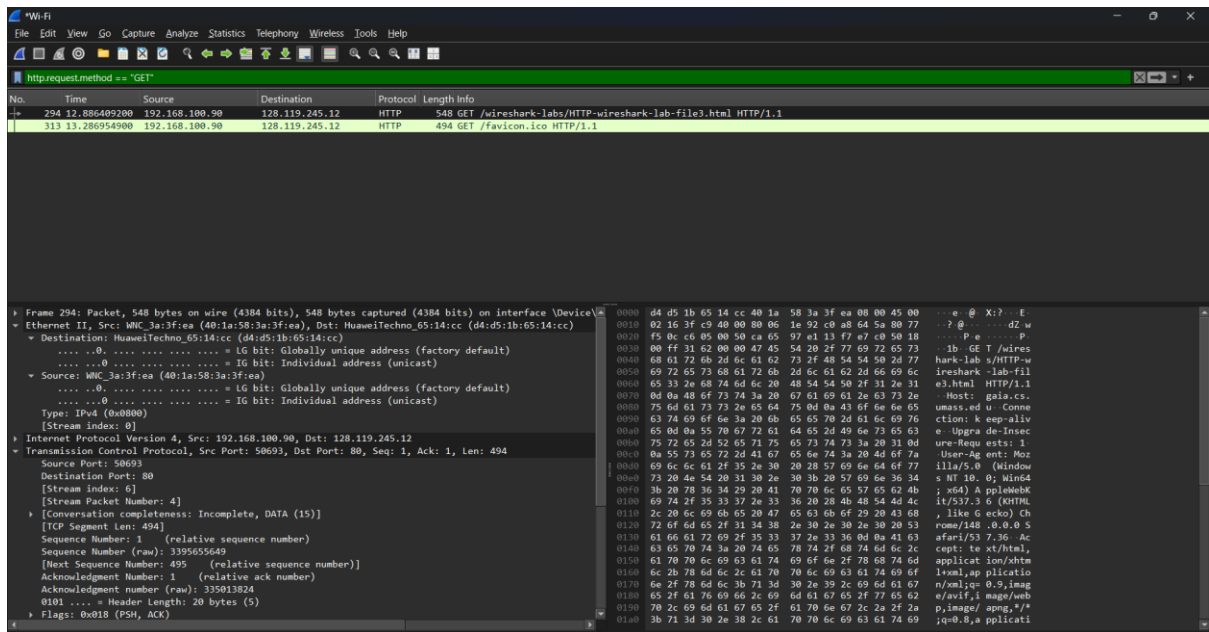


1.4 Filter Non-IP Protocol

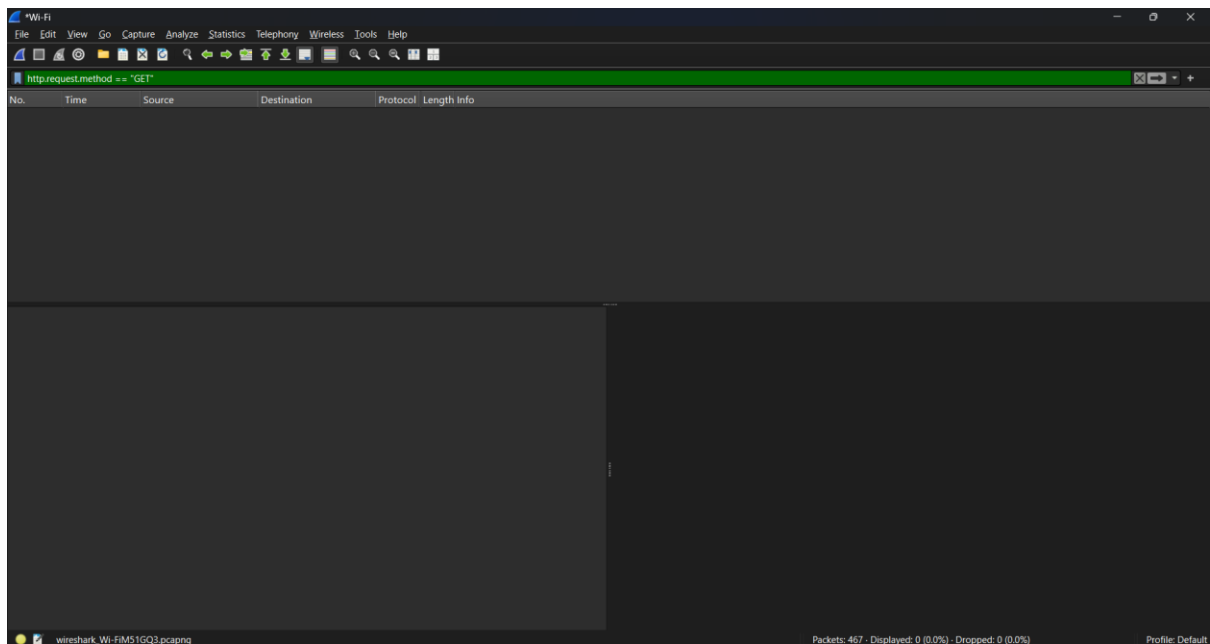

2.1 ARP Cache Clearing

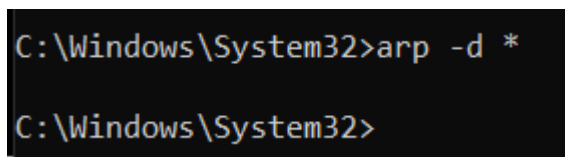

2.2 ARP Request

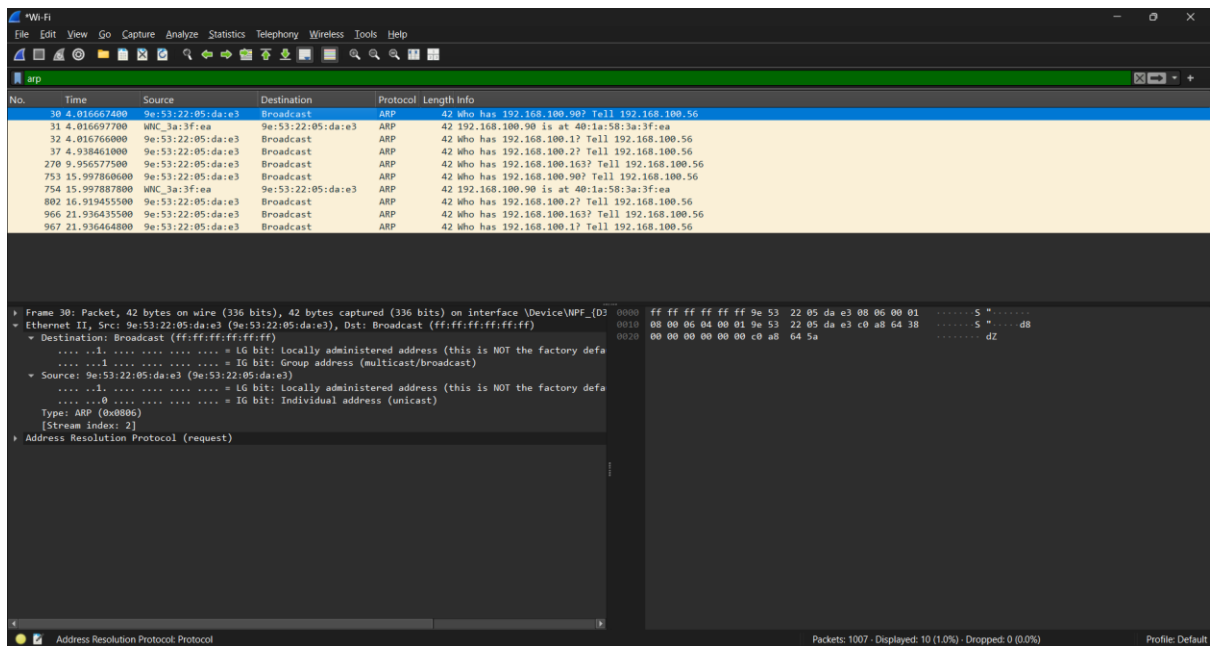

2.3 ARP Reply

The image shows a Wireshark network traffic capture. The top pane displays a list of packets, with packet 31 selected. The middle pane shows the details of the selected packet, and the bottom pane shows the raw packet data in hexadecimal and ASCII.

Packets List:

No.	Time	Source	Destination	Protocol	Length	Info
30	4.016667490	9e:53:22:05:da:e3	Broadcast	ARP	42	Who has 192.168.100.90? Tell 192.168.100.56
31	4.016977790	WNC_3a:3f:ea	9e:53:22:05:da:e3	ARP	42	192.168.100.90 is at 40:1a:58:3a:3f:ea
32	4.016766000	9e:53:22:05:da:e3	Broadcast	ARP	42	Who has 192.168.100.1? Tell 192.168.100.56
37	4.938461000	9e:53:22:05:da:e3	Broadcast	ARP	42	Who has 192.168.100.2? Tell 192.168.100.56
270	9.956577500	9e:53:22:05:da:e3	Broadcast	ARP	42	Who has 192.168.100.163? Tell 192.168.100.56
753	15.997860600	9e:53:22:05:da:e3	Broadcast	ARP	42	Who has 192.168.100.90? Tell 192.168.100.56
754	15.997887800	WNC_3a:3f:ea	9e:53:22:05:da:e3	ARP	42	192.168.100.90 is at 40:1a:58:3a:3f:ea
802	16.919455500	9e:53:22:05:da:e3	Broadcast	ARP	42	Who has 192.168.100.2? Tell 192.168.100.56
966	21.936435500	9e:53:22:05:da:e3	Broadcast	ARP	42	Who has 192.168.100.163? Tell 192.168.100.56
967	21.936464800	9e:53:22:05:da:e3	Broadcast	ARP	42	Who has 192.168.100.1? Tell 192.168.100.56

Packet 31 Details:

- Frame 31: Packet, 42 bytes on wire (336 bits), 42 bytes captured (336 bits) on interface \Device\NPF_{D3...}
- Ethernet II, Src: WNC_3a:3f:ea (40:1a:58:3a:3f:ea), Dst: 9e:53:22:05:da:e3 (9e:53:22:05:da:e3)
- Destination: 9e:53:22:05:da:e3 (9e:53:22:05:da:e3)
 -1..... = LG bit: Locally administered address (this is NOT the factory default)
 -0..... = IG bit: Individual address (unicast)
- Source: WNC_3a:3f:ea (40:1a:58:3a:3f:ea)
 -0..... = LG bit: Globally unique address (factory default)
 -0..... = IG bit: Individual address (unicast)
- Type: ARP (0x0806)
- [Stream index: 3]
- Address Resolution Protocol (reply)

Raw Data:

```
0000  9e 53 22 05 da e3 40 1a 58 3a 3f ea 08 06 00 01  -S*...@ X:.....
0010  08 00 06 04 00 02 40 1a 58 3a 3f ea c0 a8 64 5a  -...@ X:....dZ
0020  9e 53 22 05 da e3 c0 a8 64 30  -S*....d0
```

Address Resolution Protocol: Protocol

Packets: 1007 - Displayed: 10 (1.0%) - Dropped: 0 (0.0%)

Profile: Default