


Product Specifications

This chapter contains the Quantum technical specifications and rated conditions for operation. For other FaroArm models, please consult the original User Manual that shipped with your FARO FaroArm or contact FARO Customer Service by [Phone](#), [Fax](#) or [Technical Support](#).

FaroArm Quantum


Model 21000

Size	L1	L2	Weight 6-Axis	Weight 7-Axis
Quantum				
1.5M length	398 mm 15.7 in	213 mm 8.4 in	8.1 kg 17.9 lb	N/A
2.5M length	629 mm 24.8 in	444 mm 17.5 in	8.5 kg 18.7 lb	8.8 kg 19.4 lb
3.0M length	755 mm 29.7 in	569 mm 22.4 in	8.8 kg 19.4 lb	9.0 kg 19.8 lb
3.5M length	879 mm 34.6 in	694 mm 27.3 in	9.0 kg 19.8 lb	9.2 kg 20.3 lb
4.0M length	1004 mm 39.5 in	819 mm 32.2 in	9.2 kg 20.3 lb	9.5 kg 20.9 lb

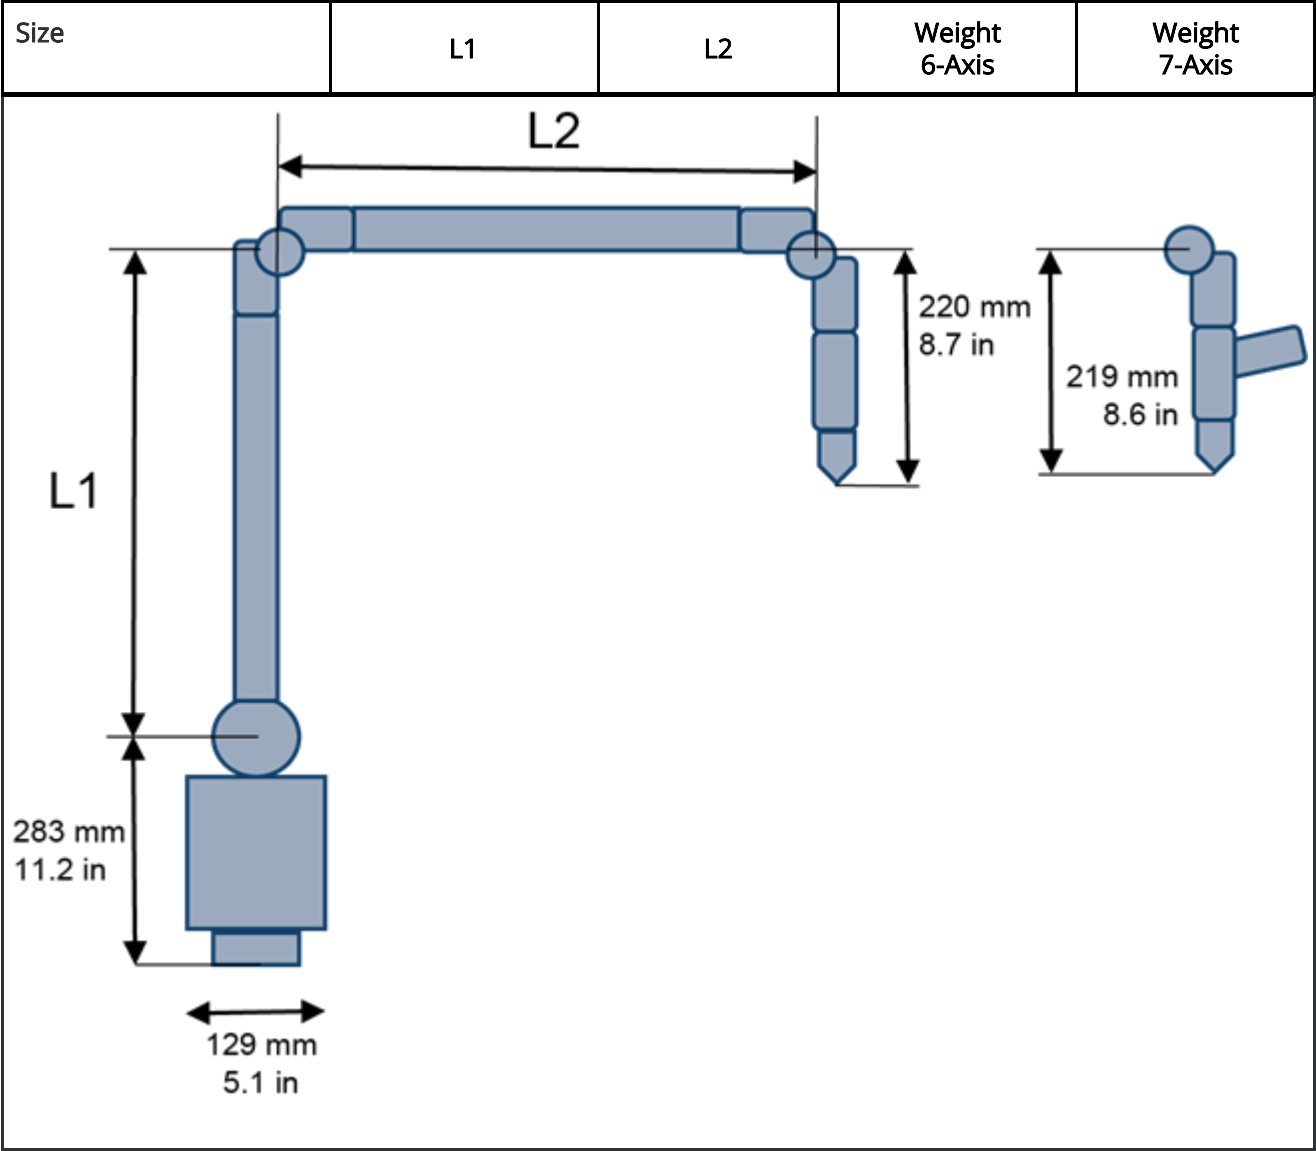



Size 6-Axis	A	B	C	Shipping Weight
Quantum Shipping Case				
1.5M length	114.5cm 45.1 in	40.9cm 16.1 in	33cm 13.0 in	26.0 kg 57.3 lb
2.5M length	114.5cm 45.1 in	40.9cm 16.1 in	33cm 13.0 in	27.1 kg 59.6 lb
3.0M length	149 cm 58.7 in	47.2 cm 18.6 in	26.9 cm 10.6 in	29.9 kg 65.9 lb
3.5M length	149 cm 58.7 in	47.2 cm 18.6 in	26.9 cm 10.6 in	30.2 kg 66.5 lb
4.0M length	149 cm	47.2 cm	26.9 cm	30.5 kg


Size 6-Axis	A	B	C	Shipping Weight
	58.7 in	18.6 in	10.6 in	67.2 lb

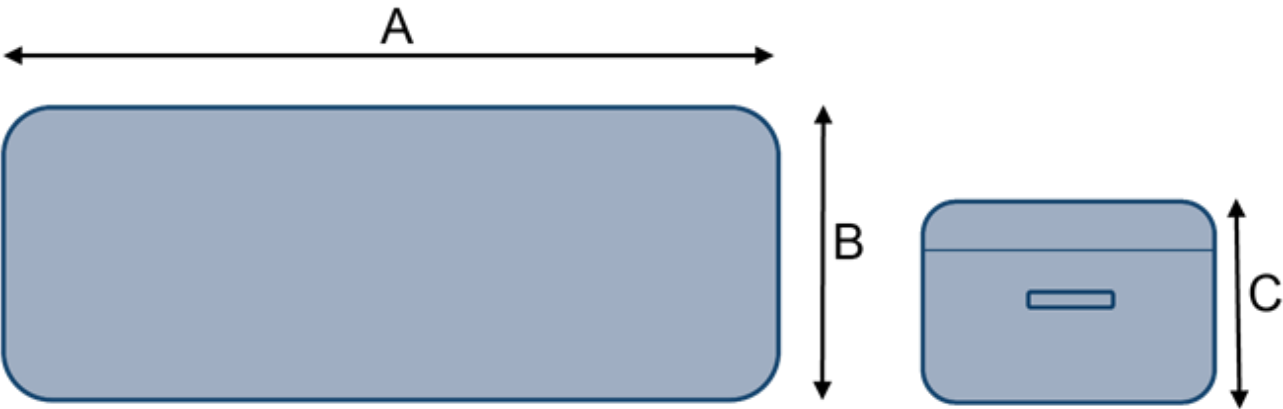


Size 7-Axis	A	B	C	Shipping Weight
Quantum Shipping Case				
2.5M length	114.5cm 45.1 in	40.9cm 16.1 in	33cm 13.0 in	27.2 kg 59.9 lb
3.0M length	149 cm 58.7 in	47.2 cm 18.6 in	26.9 cm 10.6 in	30.0 kg 66.1 lb
3.5M length	149 cm 58.7 in	47.2 cm 18.6 in	26.9 cm 10.6 in	30.3 kg 66.8 lb
4.0M length	149 cm 58.7 in	47.2 cm 18.6 in	26.9 cm 10.6 in	30.6 kg 67.5 lb

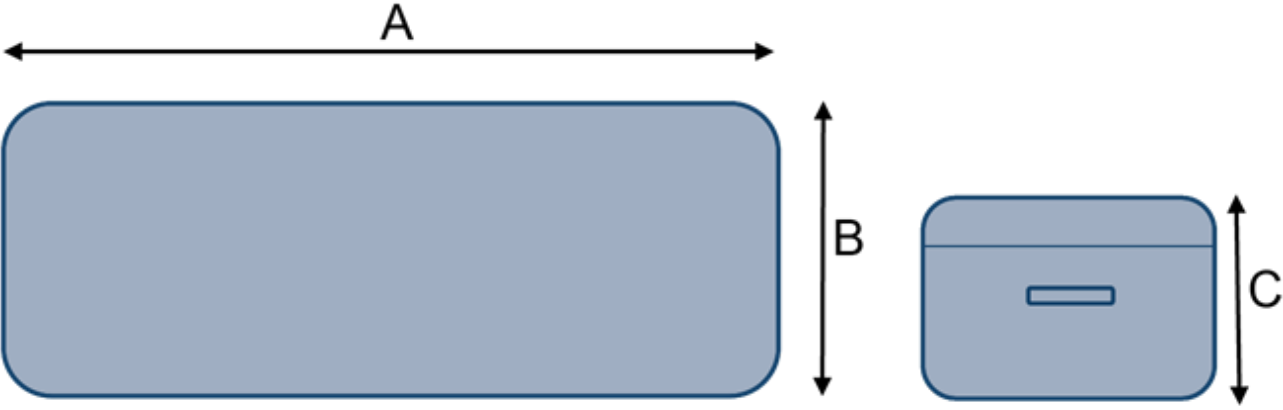

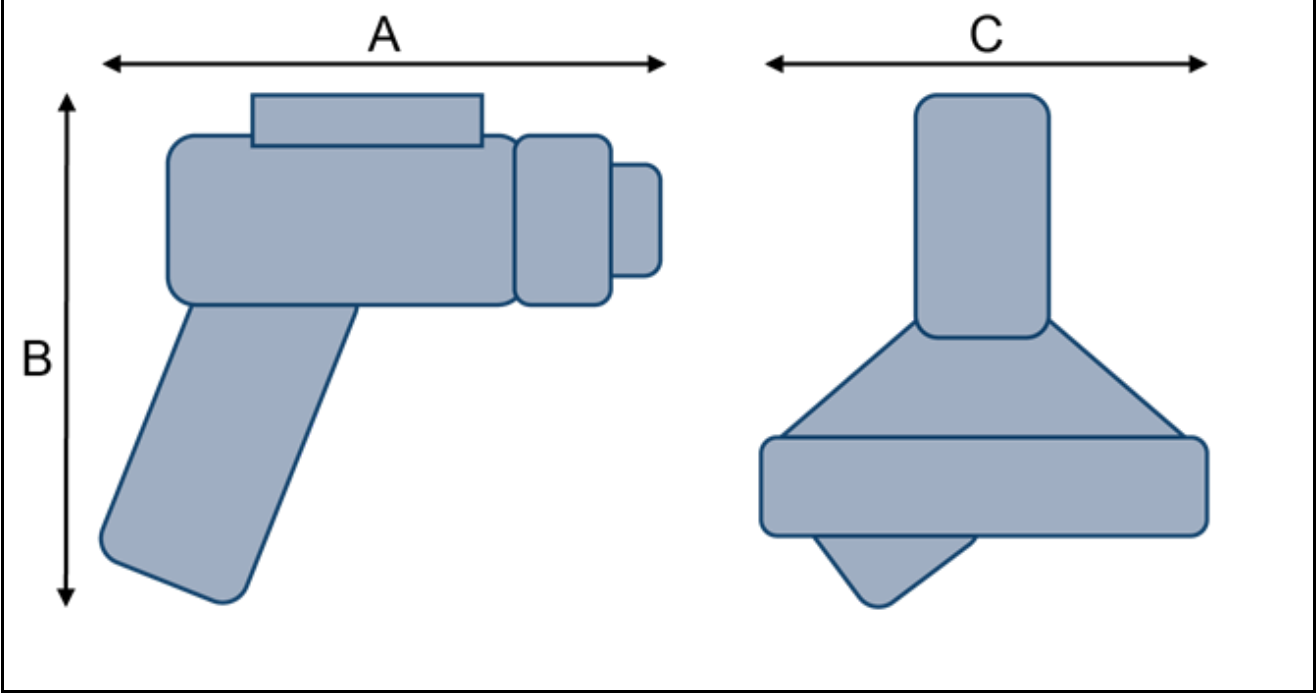Size	A	B	C	Weight
FARO Laser Line Probe	190 mm 7.5 in	177 mm 7.0 in	133 mm 5.2 in	0.5 kg 1.1 lb
				

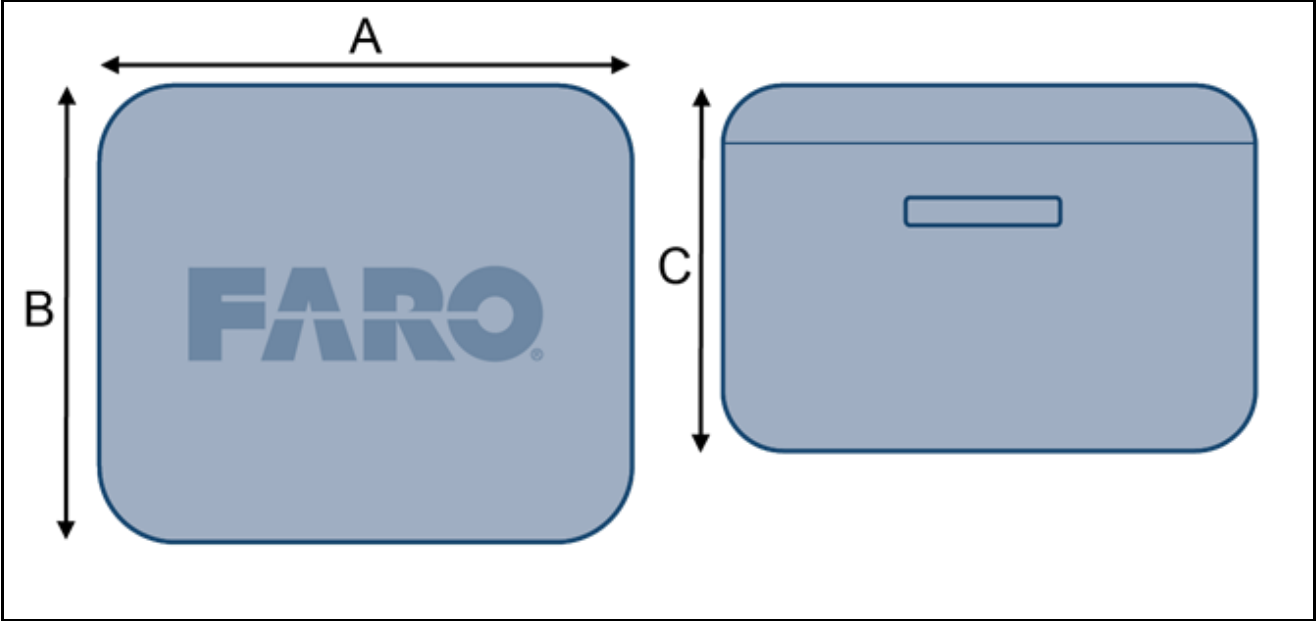
Size	A	B	C	Shipping Weight
FARO Laser Line Probe Shipping Case	29.7 cm 11.7 in	23.1 cm 9.1 in	16.5 cm 6.5 in	1.9 kg 4.1 lb
				

Size	A	B	Shipping Weight
8-Axis	25.0 cm 9.8 in	23.0cm 9.0 in	4.5 kg 10.0 lb

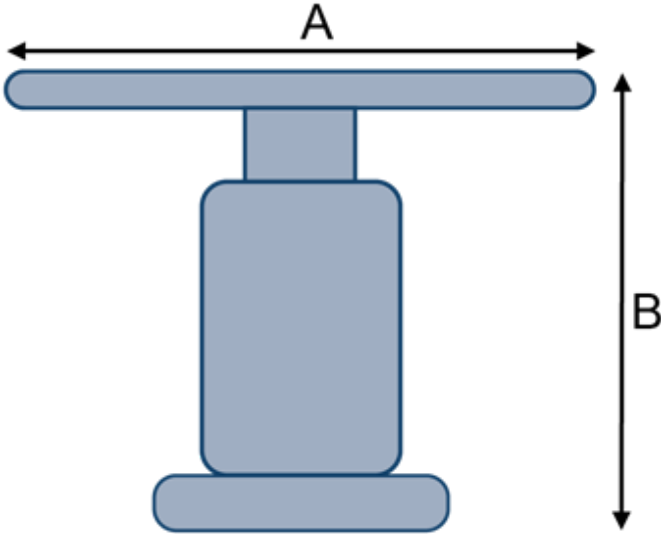

The diagram shows a blue 8-Axis device. Dimension A is the width of the top horizontal bar, indicated by a double-headed arrow above it. Dimension B is the height of the device from the base to the top of the bar, indicated by a double-headed arrow to the right of it.

Size	A	B	C	Shipping Weight
Shipping Case				
8-Axis	45.5cm 17.9 in	34.0cm 13.4 in	17.5cm 6.9 in	9.6 kg 21.0 lb

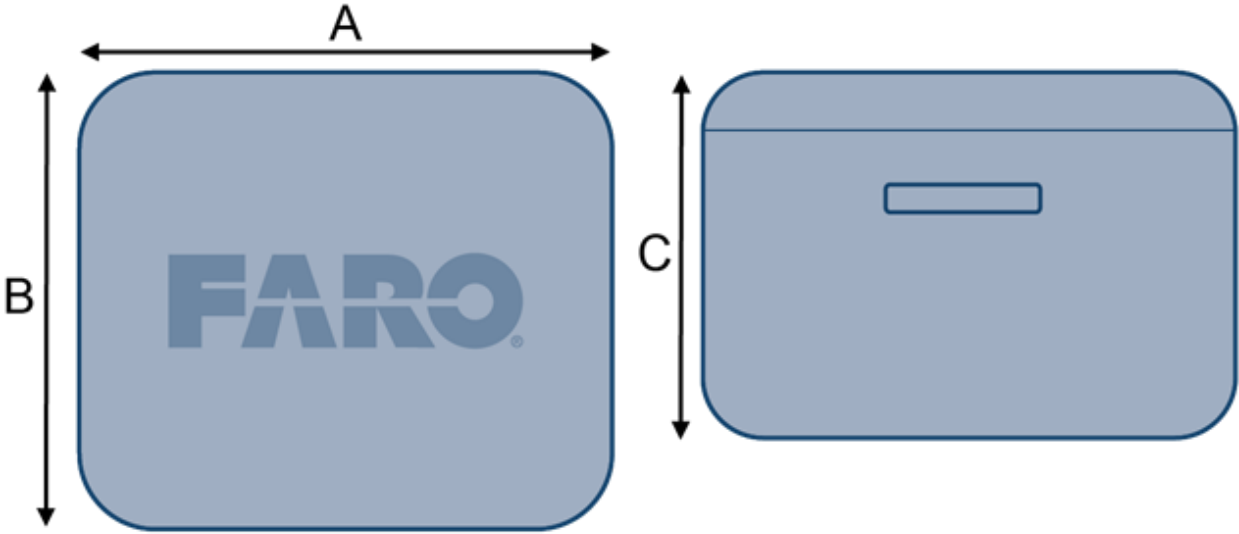

The diagram shows a blue rectangular shipping case with rounded corners. Dimension A is the width, indicated by a double-headed arrow above the front view. Dimension B is the height of the front view, indicated by a double-headed arrow to the left of it. Dimension C is the height of the side view, indicated by a double-headed arrow to the left of it. The front view features the 'FARO' logo in a lighter blue color.

Quantum Rated Conditions	
Operating Temperature Range	10°C to 40°C 50°F to 104°F
Storage Temperature Range	-20°C to 70°C -4°F to 122°F
Temperature Rate	3°C/5min 5.4°F/5min
Operating Humidity	Minimum 0% RH, Maximum 95% RH
Storage Humidity	Minimum 0% RH, Maximum 100% RH
Barometric Pressure Range	Minimum 225.50mmHG, 8.878inHG Maximum 825.07mmHG, 32.483inHG
Power Supply	Universal worldwide voltage 100-240VAC, 47 to 63Hz

FARO Blu ^{HD} Laser Line Probe Specifications and Accuracy	
Accuracy	±25µm (±0.0010 in)
Repeatability	25µm, 2σ (0.0010 in)
Stand-off	115mm (4.5in)
Depth of Field	115mm (4.5in)
Effective Scan width	Near Field 80mm (3.1in) Far Field 150mm (5.9in)
Points per Line	Maximum 4,000 points/line
Minimum Point Spacing	20µm (.0008in)
Point Acquisition Rate	Up to 1.2 million points per second

FARO Blu^{HD} Laser Line Probe Specifications and Accuracy

Laser	Class 2
-------	---------

FARO Blu^{SD} Laser Line Probe Specifications and Accuracy

Accuracy	±25µm (±0.0010 in)
Repeatability	25µm, 2σ (0.0010 in)
Stand-off	115mm (4.5in)
Depth of Field	115mm (4.5in)
Effective Scan width	Near Field 80mm (3.1in) Far Field 150mm (5.9in)
Points per Line	1,000
Minimum Point Spacing	80µm (.0031in)
Scan Rate	120frames/second 120fps x 1,000points/line = 120,000points/sec
Laser	Class 2

FARO Prizm Laser Line Probe - Scan Points with Color Values Specifications and Accuracy

Accuracy	±30µm (±0.0011 in)
Repeatability	30µm, 2σ (0.0011in)
Stand-off	115mm (4.5in)
Depth of Field	115mm (4.5in)
Effective Scan width	Near Field 80mm (3.1in) Far Field 150mm (5.9in)
Points per Line	2,000
Minimum Point Spacing	40µm (.0015in)

FARO Prizm Laser Line Probe - Scan Points with Color Values Specifications and Accuracy

Scan Rate	120frames/second 120fps x 2,000points/line = 240,000points/sec
Laser	Class 2

FARO Prizm Laser Line Probe - Scan Points Only Specifications and Accuracy

Accuracy	±30µm (±0.0011 in)
Repeatability	30µm, 2σ (0.0011in)
Stand-off	115mm (4.5in)
Depth of Field	115mm (4.5in)
Effective Scan width	Near Field 80mm (3.1in) Far Field 150mm (5.9in)
Points per Line	2,000
Minimum Point Spacing	40µm (.0015in)
Scan Rate	300frames/second 300fps x 2,000points/line = 600,000points/sec
Laser	Class 2



© 2017 - 2024 FARO Technologies Inc.

(800) 736-2771 +1 407 333 3182
+1 407 562 5294
support@faro.com