



3D PDF DATASHEET


Datasheet creation date: 2026/07/02 17:14

MOTION & CONTROL
NSK

2200

Cylindrical Bore

3D View

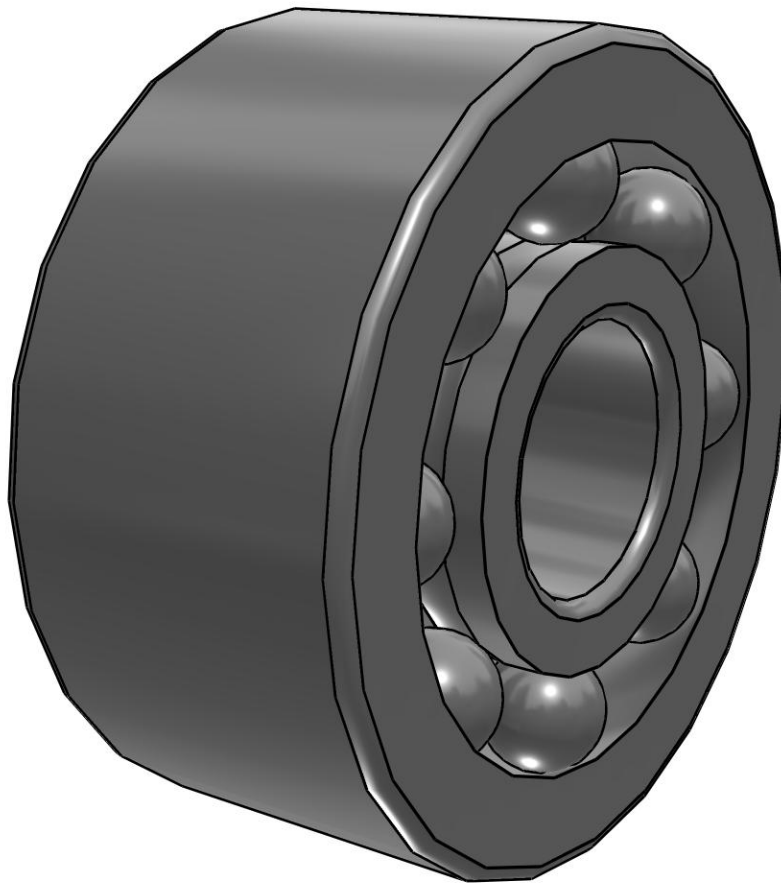

Zoom

Moves you toward or away from objects in the scene when you drag vertically. You can also zoom with the hand tool by holding down Shift as you drag.



Pan

Moves the model vertically and horizontally only. You can also pan with the hand tool: Ctrl-drag.



Rotate

Turns 3D objects around relative to the screen. How the objects move depends on the starting view, where you start dragging and the direction in which you drag.





3D PDF DATASHEET

Datasheet creation date: 2026/07/02 17:14

MOTION & CONTROL

NSK

2D Drawing

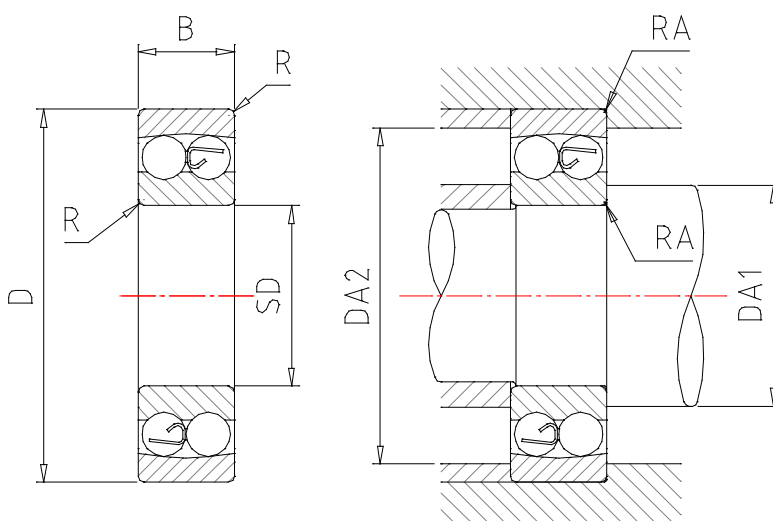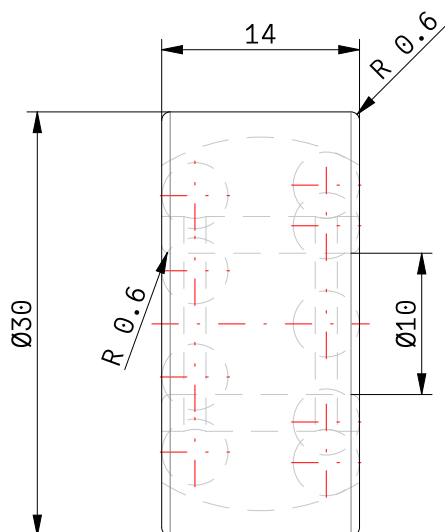

Product Information

STAN: Standard	-	
ORDER: Bearing No.	2200	
SD: Inside Diameter	10	mm
D: Outside Diameter	30	mm
B: Width	14	mm
R: Chamfer Dimension	0.6	mm
CR1: Basic Dynamic Load Ratings	7450	N
COR1: Basic Static Load Ratings	1590	N
CR2: Basic Dynamic Load Ratings	760	kgf
COR2: Basic Static Load Ratings	162	kgf
LG: Limiting Speed Grease	24000	rpm
LO: Limiting Speed Oil	28000	rpm
DA1: Abutment and Fillet Dimensions min.	14.0	mm
DA2: Abutment and Fillet Dimensions max.	26.0	mm
RA: Abutment and Fillet Dimensions max.	0.6	mm
E: Constant	0.64	
Y2: Axial Load Factors	1.5	
Y3: Axial Load Factors	0.98	
Y0: Axial Load Factors	1.00	
MASS: Mass	0.042	kg