

CASE I II III

RECOVERY PROCEDURES

source: chapter 6 00 – 80T – 111 – VSTOL Shipboard and LSO Manual jul 2004

METEO

CASE I: weather 3000/5
CASE II: 1000/5 / weather / 3000/5
CASE III: < 1000/5

TACAN MARSHAL *minimum 6000ft* **TACAN PRIMARY MARSHAL**

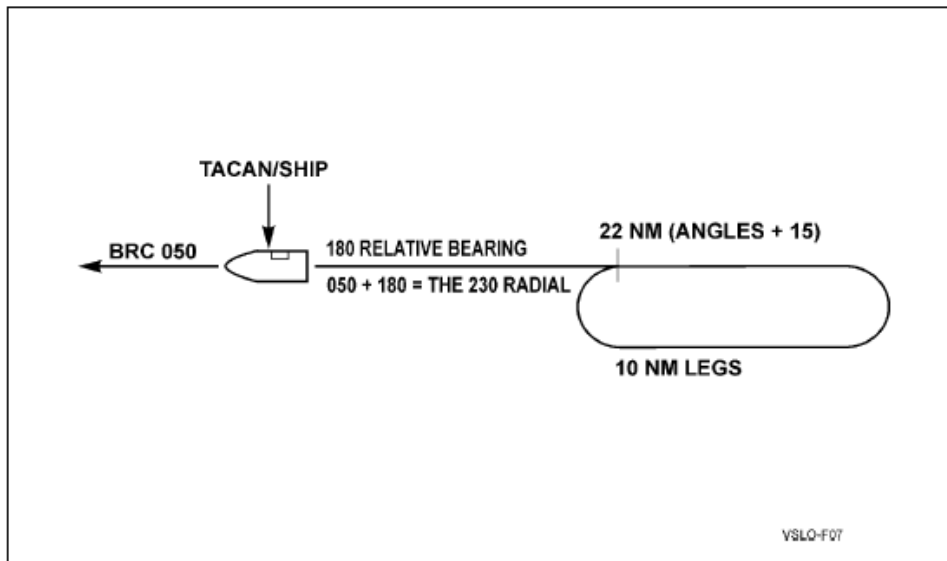


Figure 6-2. TACAN Primary Marshal

TACAN OVERHEAD MARSHAL

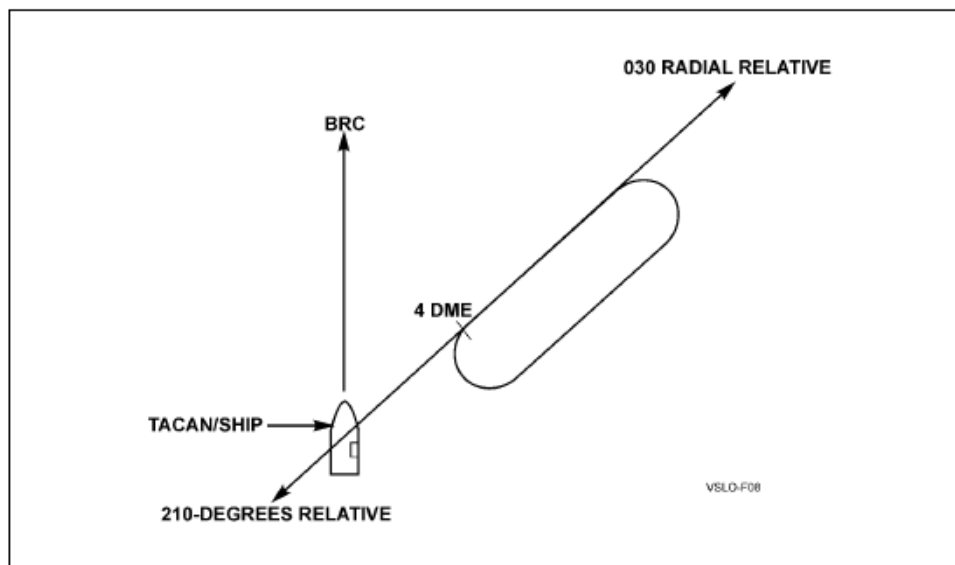


Figure 6-3. TACAN Overhead Marshal

CASE I

DELTA PATTERN *minimum 2000ft*

NAVAIR 00-80T-111

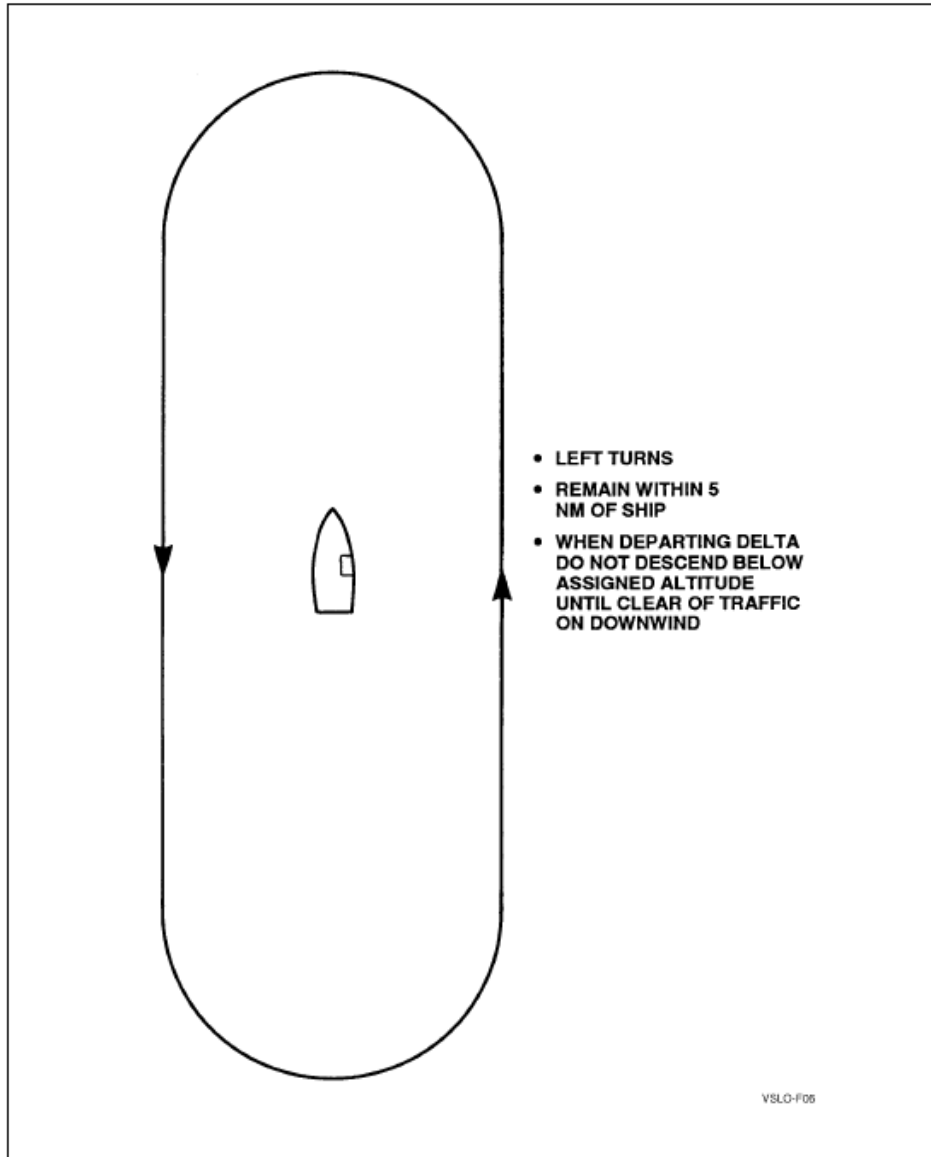


Figure 6-1. Delta Pattern

CASE I PATTERN

DAY

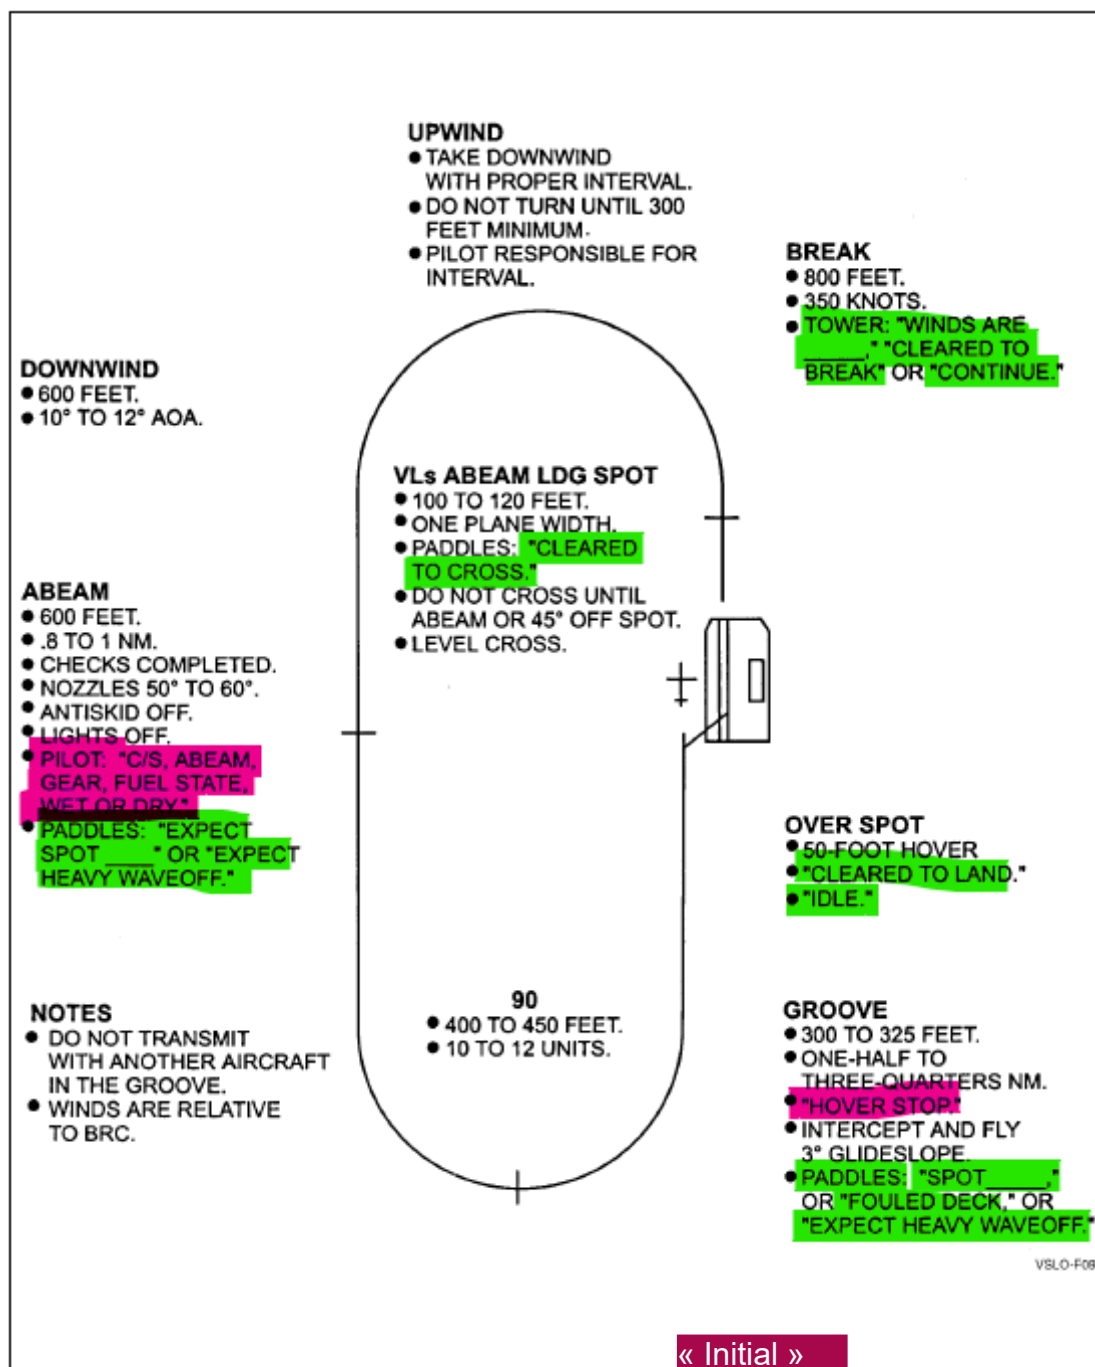


Figure 6-4. Day Case 1 Pattern

ALTITUDE = 120FT ONE PLANE WIDTH FROM THE EDGE OF THE SHIP

NIGHT

NAVAIR 00-80T-111

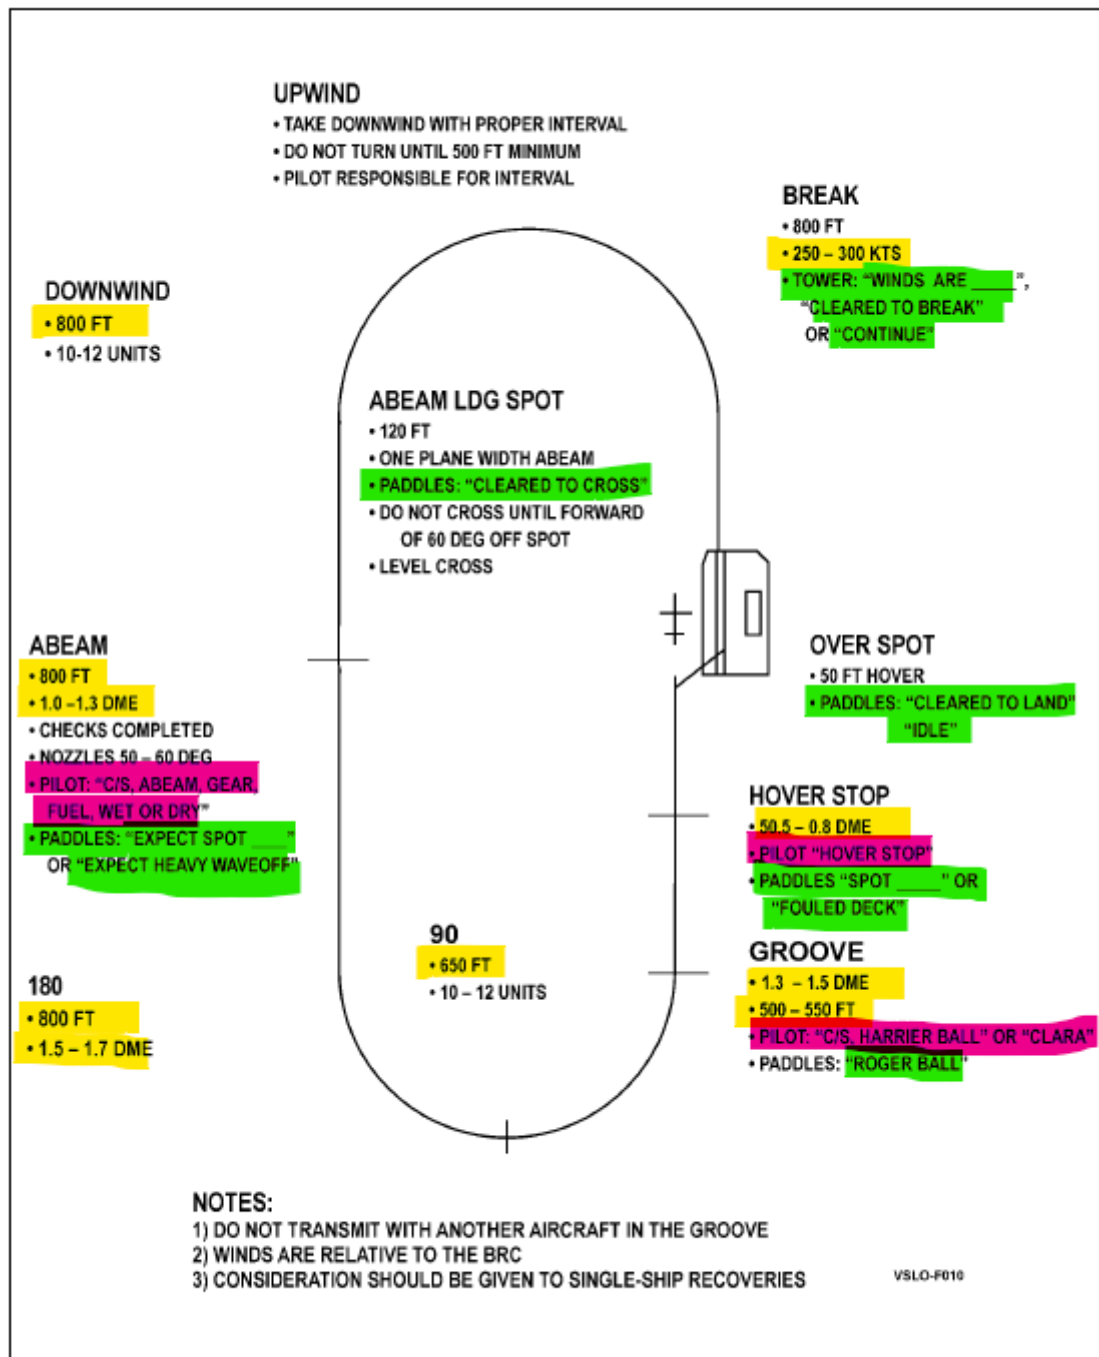


Figure 6-5. Night Case 1 Pattern (Aided)

CASE II

6.4 CASE 2 RECOVERY

6.4.1 Case 2 Defined. Case 2 recoveries are conducted when weather is 1,000/5 or better but less than 3,000/5. During a Case 2 recovery, an instrument approach is conducted in order to reach VMC underneath. Case 2 recoveries shall be conducted under procedural or positive radar control until VMC is obtained. Case 2 recoveries are conducted during the day or during NVD recoveries.

6.4.2 Case 2 Recovery Procedures. Close control shall be used by AATCC/HDC until the pilot reports "See you," at which time, normal Case 1 procedures shall be followed. If the first flight is unable to gain and maintain visual contact with the ship at the 12-mile gate, a controlled descent to 800 feet daylight/1000 feet night aided shall be initiated at the gate. If less than Case 2 weather exists at 5 miles, the first flight shall be vectored into the waveoff pattern and to Case 3 marshal. Subsequent aircraft shall be recovered as Case 3 approaches.

Note

During night aided operations consideration should be given to recovering as singles if the ceiling is less than 2000 feet.

CASE III

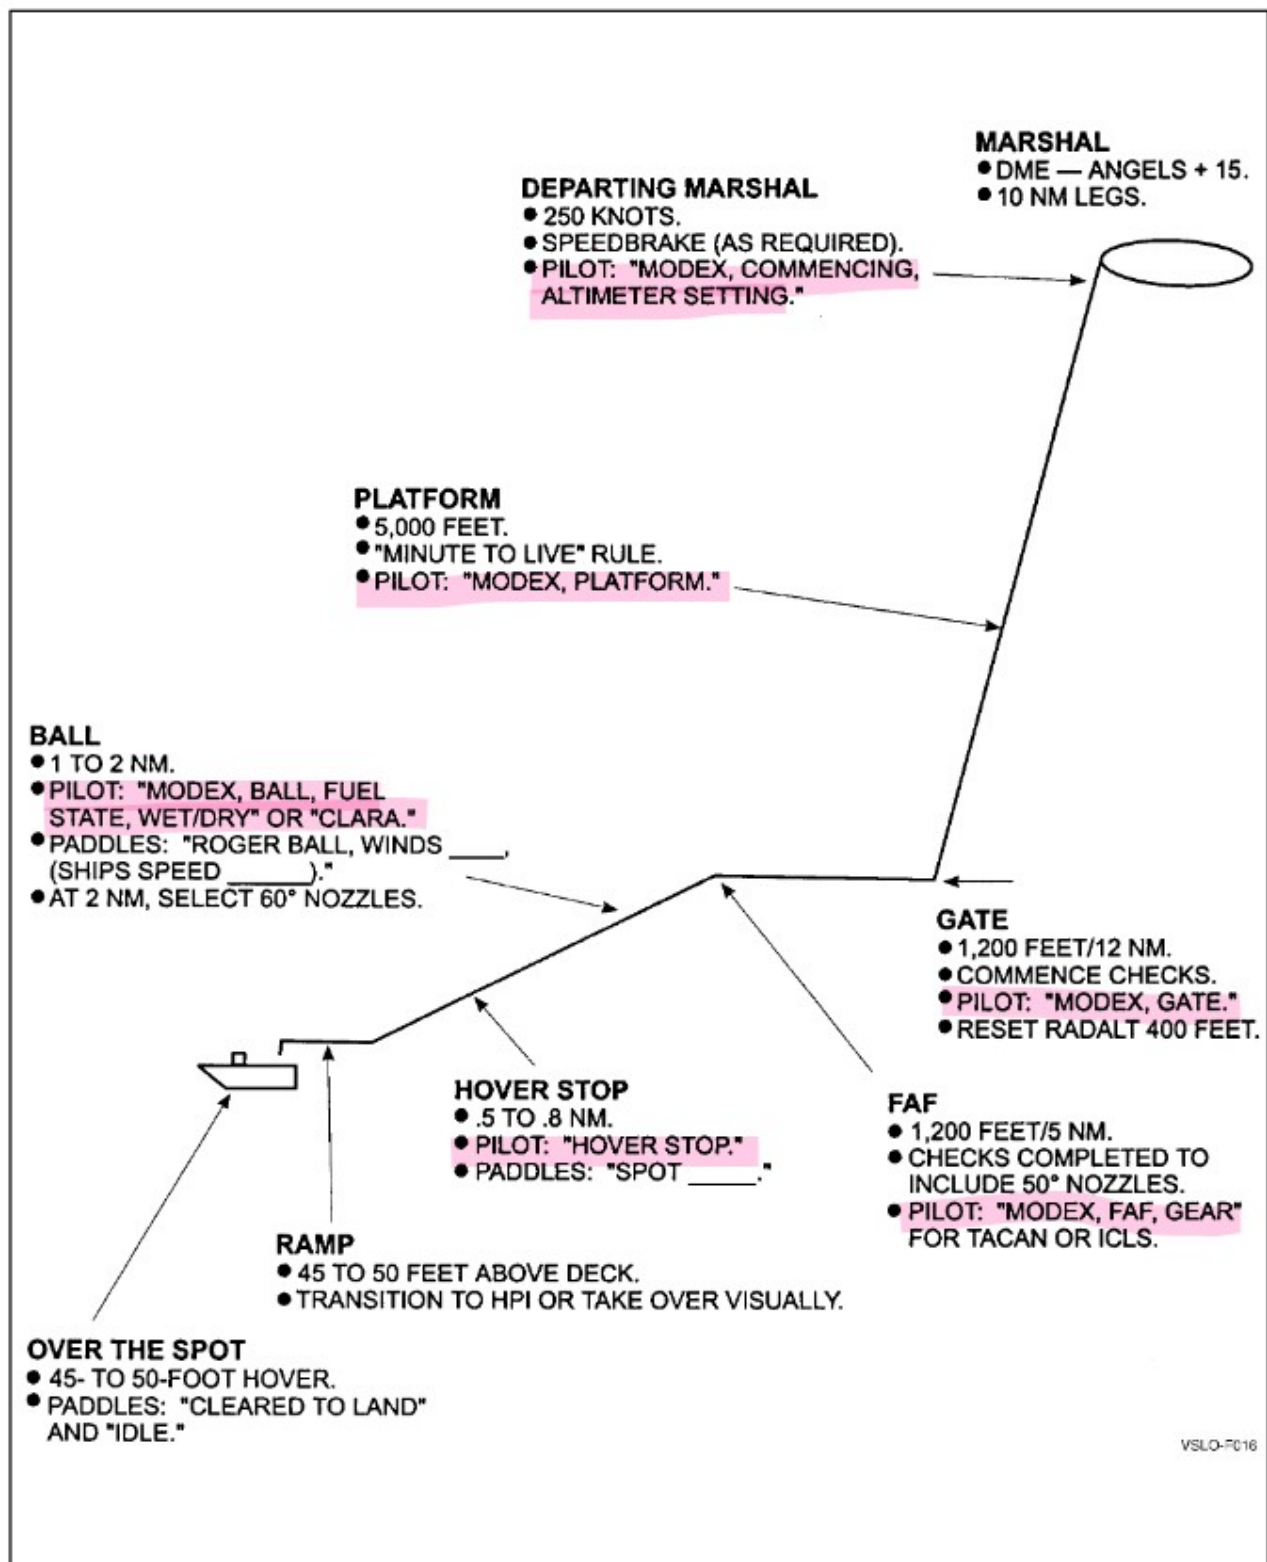


Figure 6-12. Case 3 Recovery

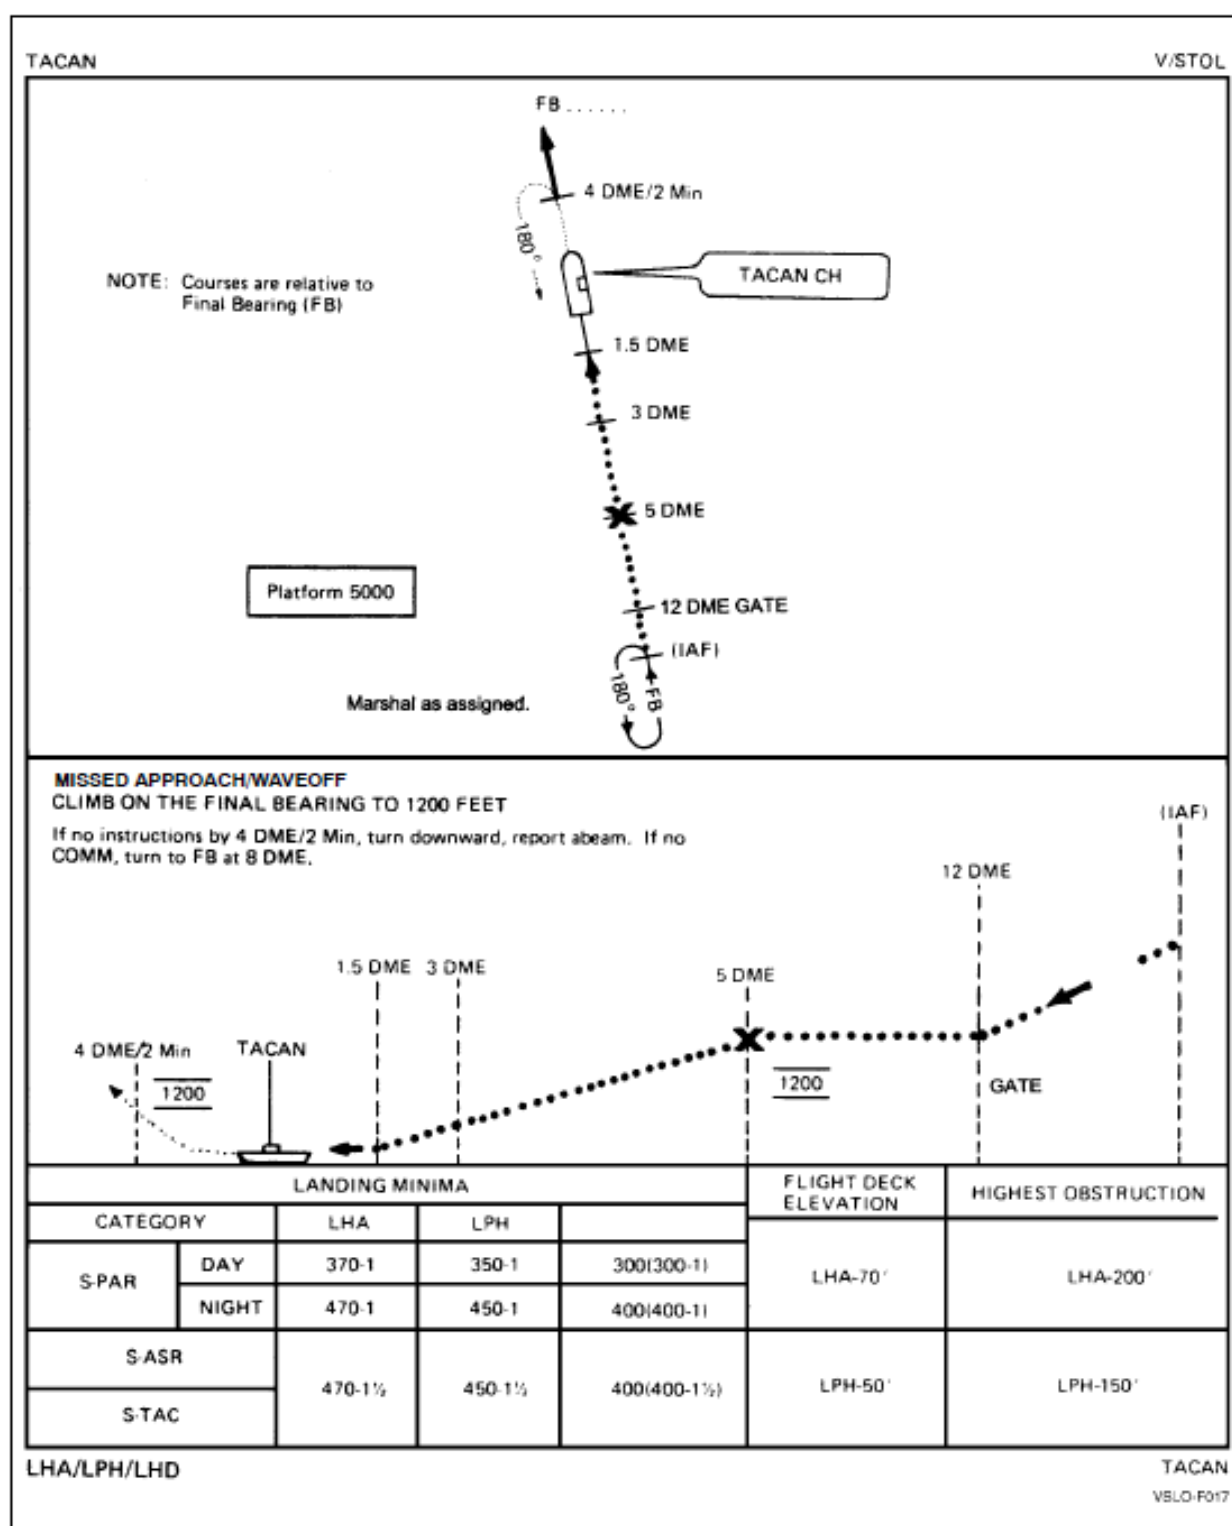


Figure 6-13. Straight-In TACAN


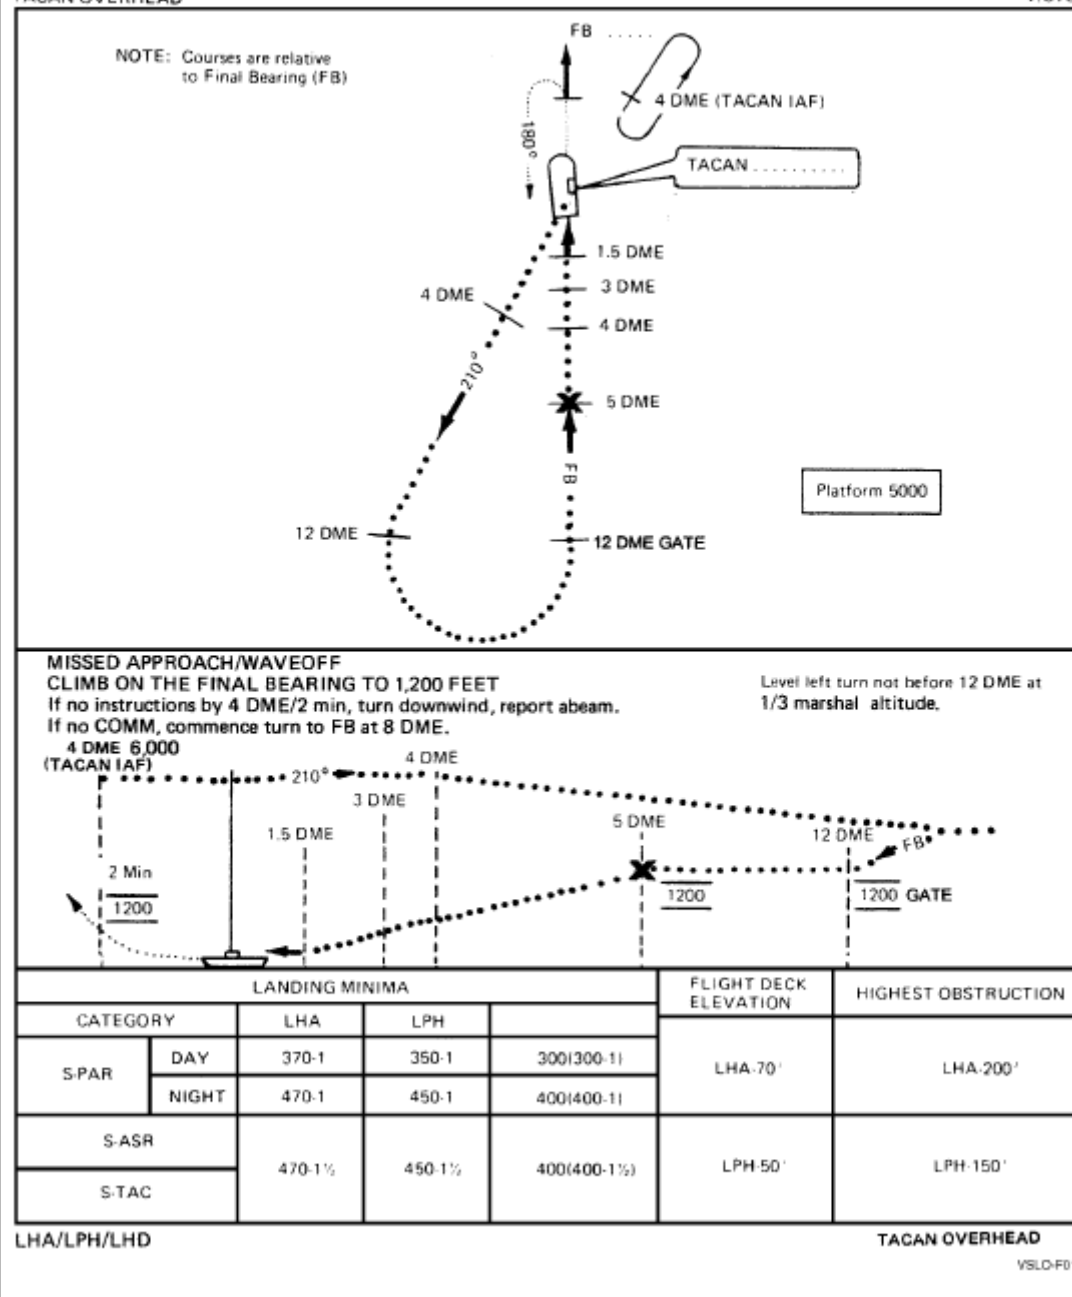


Figure 6-14. Overhead TACAN

EMERGENCY

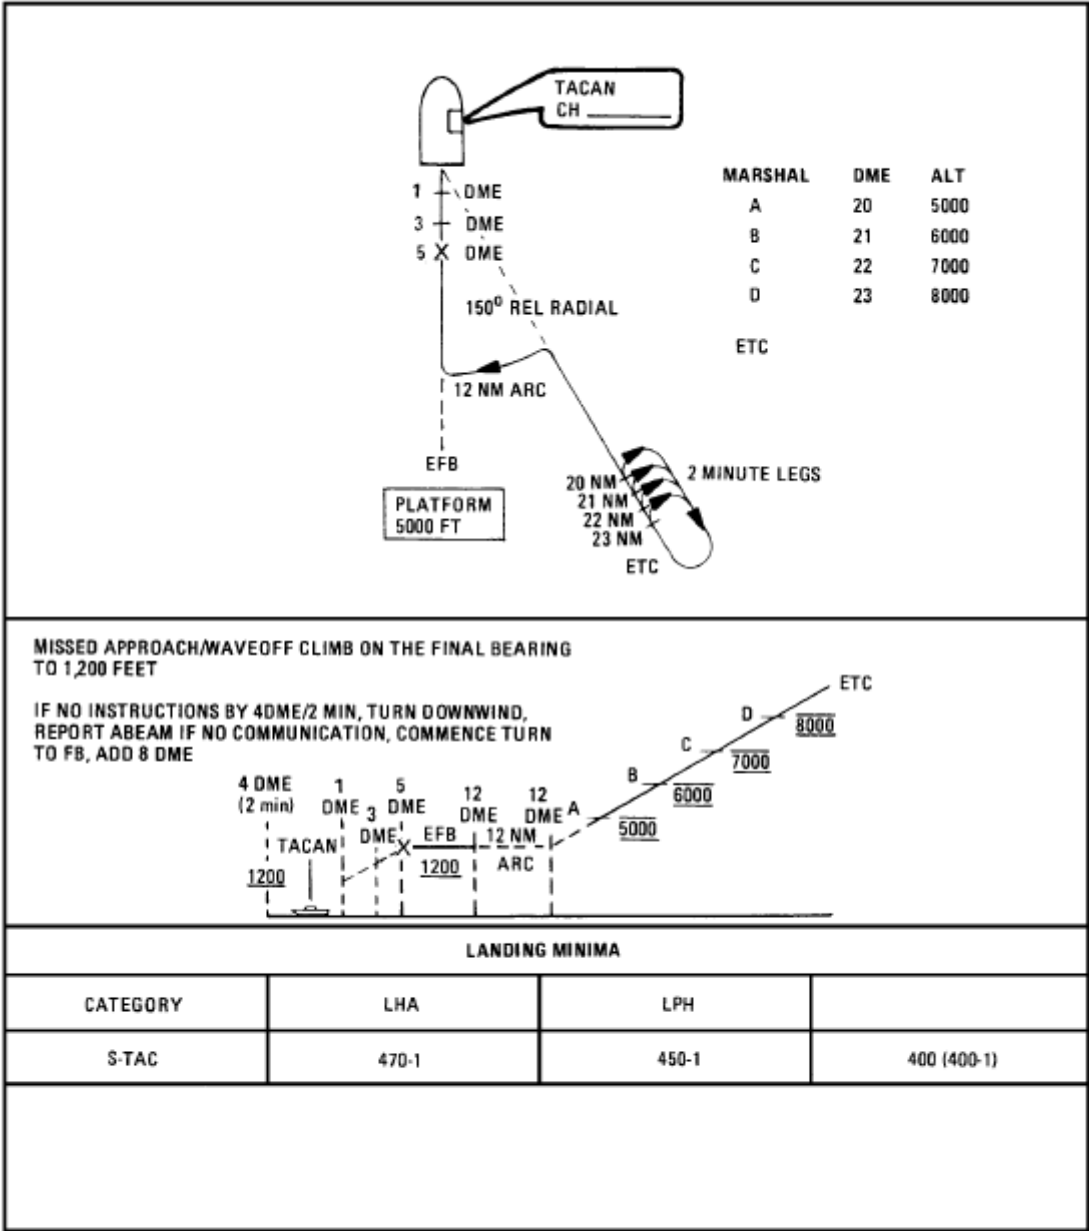

VSLO-F019

Figure 6-15. V/STOL Emergency Marshal

DEPARTURES PROCEDURES

CASE I

8.3.1 Case 1 Departure (Weather 3,000/5 or Better).

1. After takeoff, proceed straight ahead on the BRC climbing to a maximum of 500 feet. After 7 DME, an unrestricted climb may be conducted in VMC. An unrestricted climb off the bow may be conducted in VMC provided prior coordination with Tower and HDC has been conducted. Rendezvous in accordance with squadron SOPs.
2. Section/Division overhead rendezvous. With Tower/HDC's approval, aircraft are permitted to join their flights in Tower/HDC's airspace provided they can maintain VMC at or above 1,000'.

CASE II

8.3.2 Case 2 Departure (Weather 1,000/5 or Better but Less Than 3,000/5).

1. After takeoff, proceed straight ahead on the BRC climbing to a maximum of 500 feet AGL. At 7 DME, the 500-foot restriction is lifted if a climb can be conducted in VMC or if instructed by Center to climb. The pilot shall intercept the 10 DME arc and fly to the departure radial.
2. Aircraft shall rendezvous between 20 and 50 DME from the ship on the left of the departure radial. The departure radial and altitude shall be assigned prior to launch. The departure radial will normally be 20° to 40° to the left of the BRC. Flight leaders shall report at assigned altitudes, if not VMC on top. Altitudes shall normally be assigned in accordance with Figure 8-1.
3. If still IMC upon reaching altitude, the pilot shall establish holding on the departure radial between 20 and 30 DME and report established in holding. Center shall ensure altitude deconfliction between aircraft.

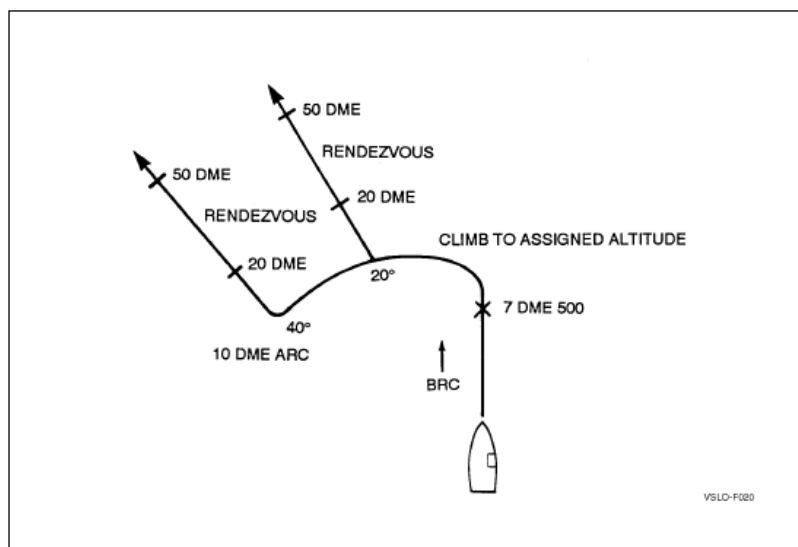


Figure 8-2. Case 2 Departure

CASE III

8.3.3 Case 3 Departure (Weather Less Than 1,000/5 or Unaided at Night). All aircraft shall launch on Center's departure frequency. Frequency changes will not be made until the aircraft is wings level at a minimum of 2,500 feet except during night CQ.

1. After takeoff, conduct a 300-knot climb on the BRC to cross the 5 DME fix at 1,500 feet or above. Climb to the assigned altitude. Intercept the 10-DME arc and fly to the assigned departure radial.
2. Rendezvous in accordance with Case 2 procedures.

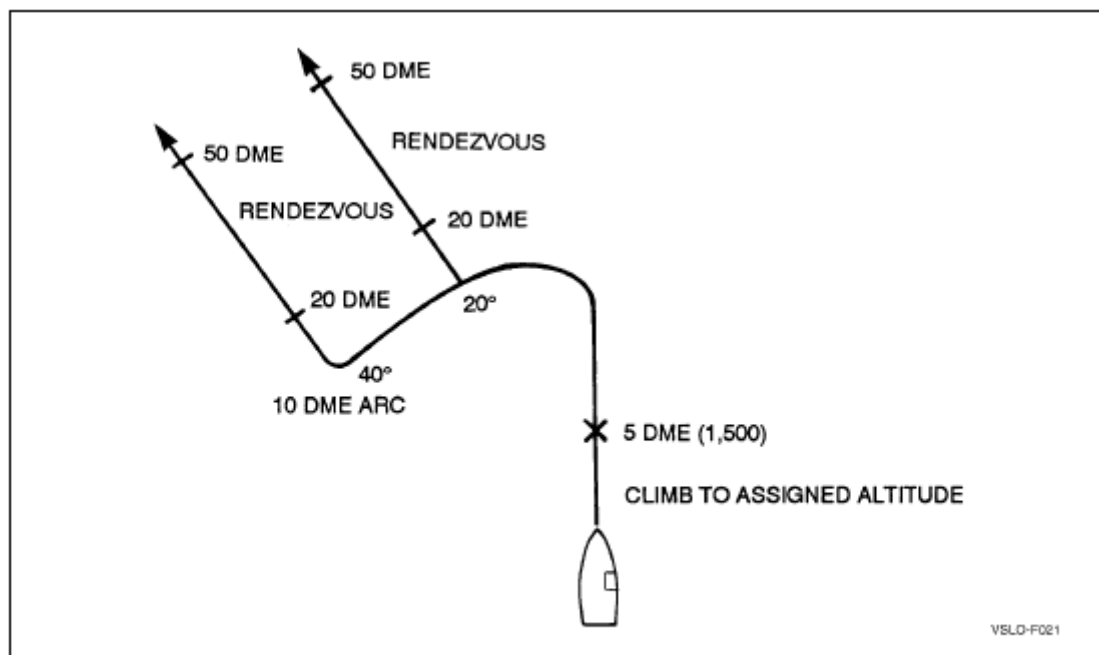


Figure 8-3. Case 3 Departure