

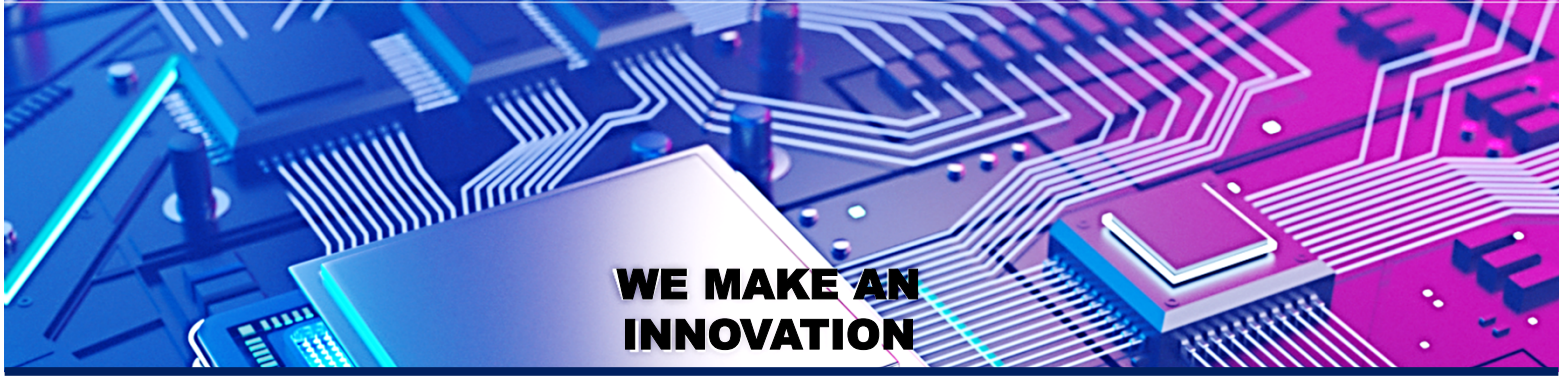


KEM CTI

I Speed Mill

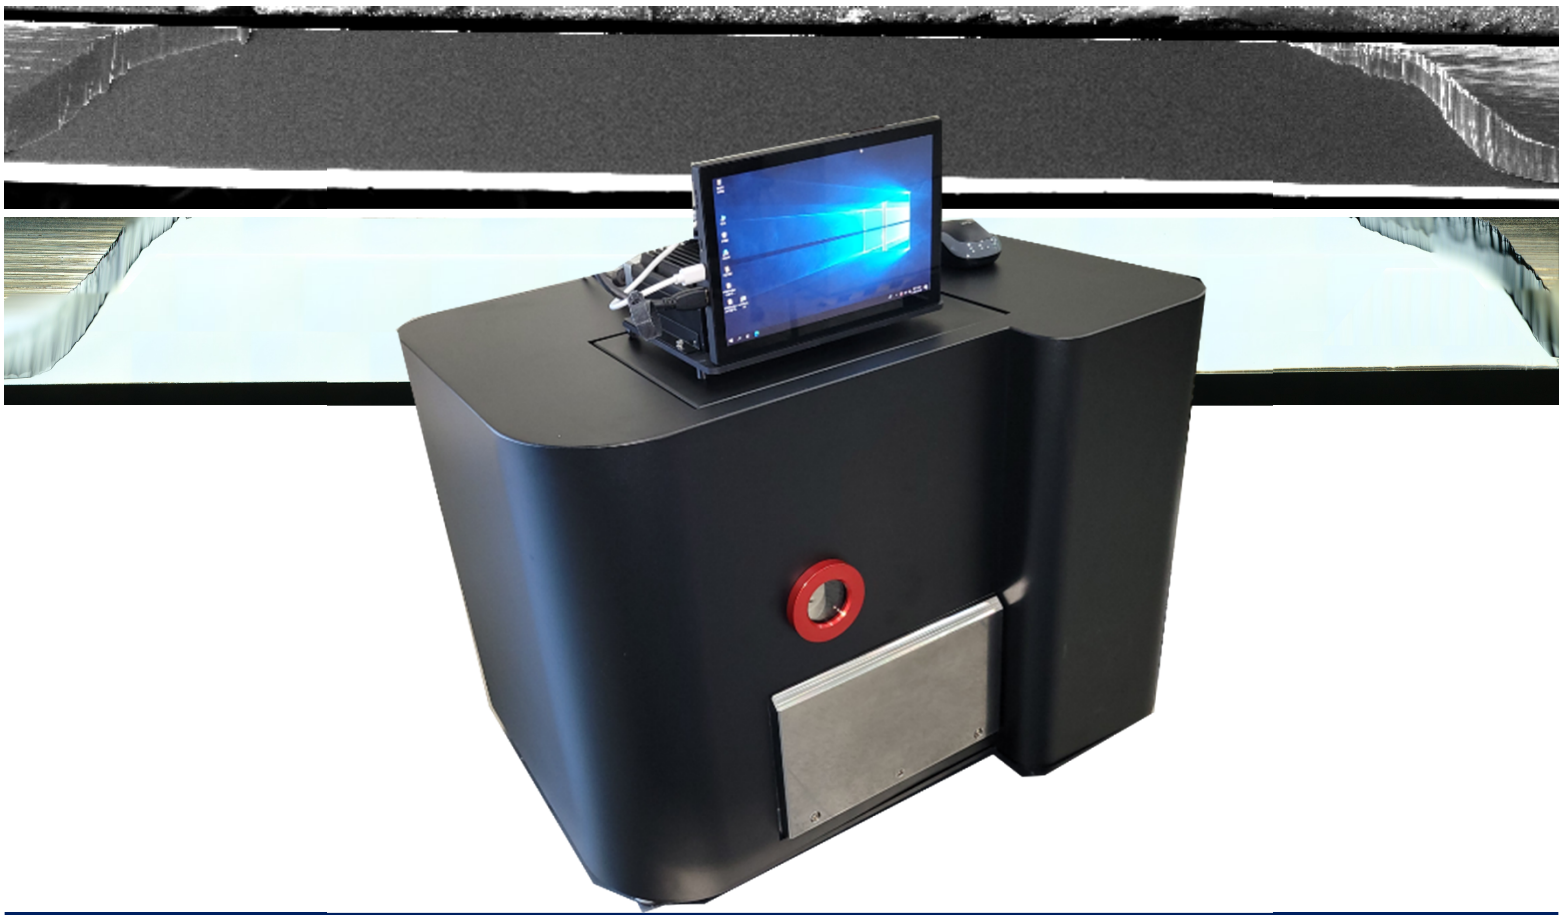

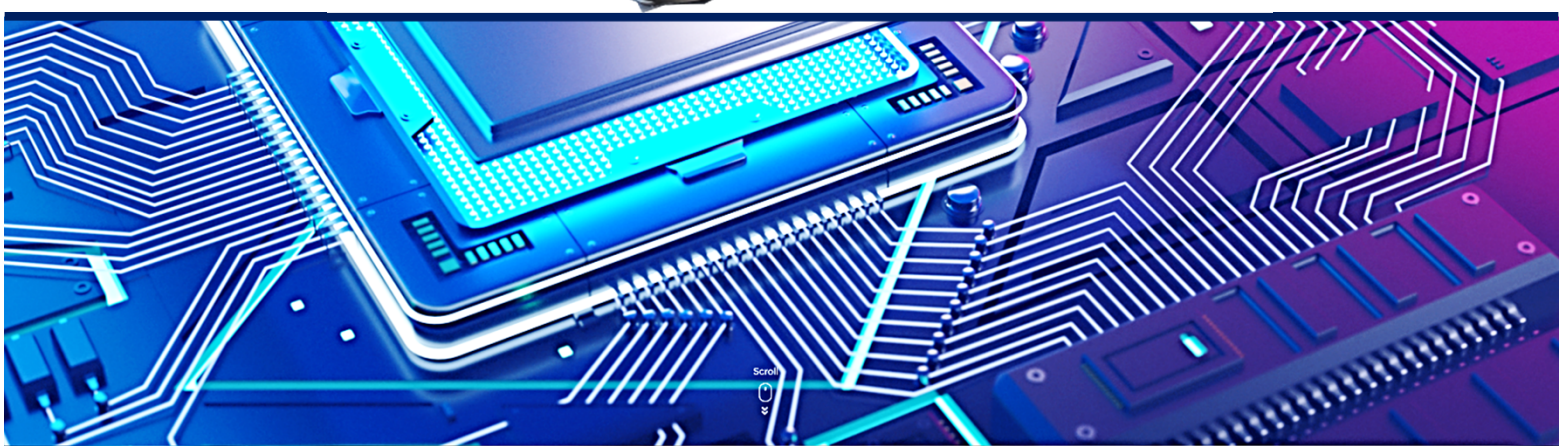


I Speed Mill

Item	Description
Ion Source Type	ICP : Inductively Coupled Plasma
Accelerating Voltage	0 ~ 20 kV
Beam Diameter	Approx. 0.5 mm
Milling Rate	> 1.3 mm/h (20 kV, Si)
Maximum Specimen Size	25(W) x 15(D) x 3(H) mm
Stage Moving Range	X: ±3.5 mm, R: 360°
Gas for Milling	Argon (99.999 % purity)
Vacuum Pump	Turbo-molecular pump, Rotary pump
Dimension & Weight	Main Unit: 600(W) x 480(L) x 480(H) mm
Power Supply	AC 220 V, 50 or 60 Hz (450W)
Grounding	100 Ω or less
Operating Pressure	5.0 x 10^{-4} torr (in the Chamber)
Vacuum Pump System	Turbo Pump / Rotary Pump (NW 25 port)
Control & Monitoring	PC – based GUI/ Real time CCD Camera

I Speed Mill Specifications


Feature

- 저전압에서의 탁월함 빔 안정성부터 고전압을 이용한 초고속 밀링까지, 폭 넓은 이온빔 레인지 제공.
- 소모품 교체 주기를 혁신적으로 개선한 ICP 이온 소스 탑재하여 1000 시간 이상의 연속 운전에서 안정적인 성능 유지
- ICP 기술로 구현한 고밀도 이온 빔을 통해 빠른 단면 가공 속도를 보장

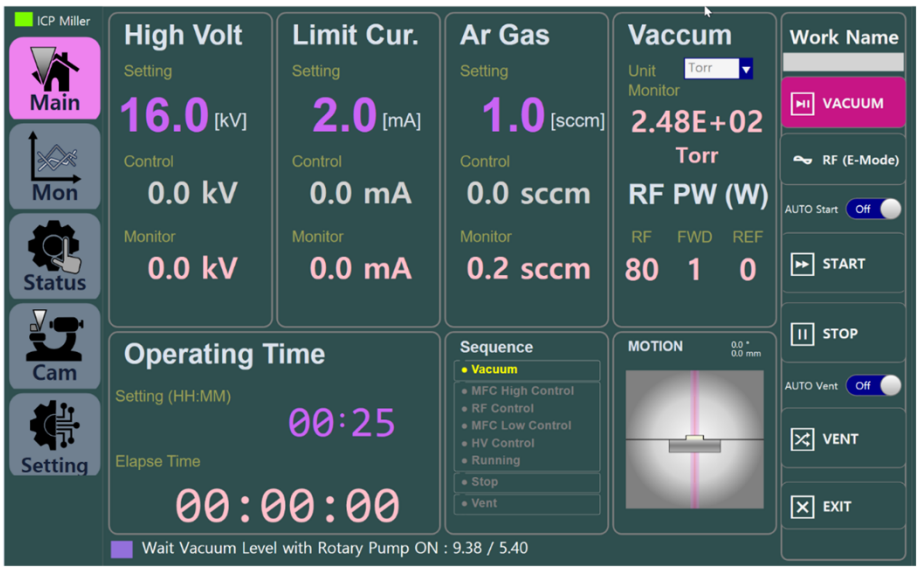


Configuration of Main UI

I Speed Mill

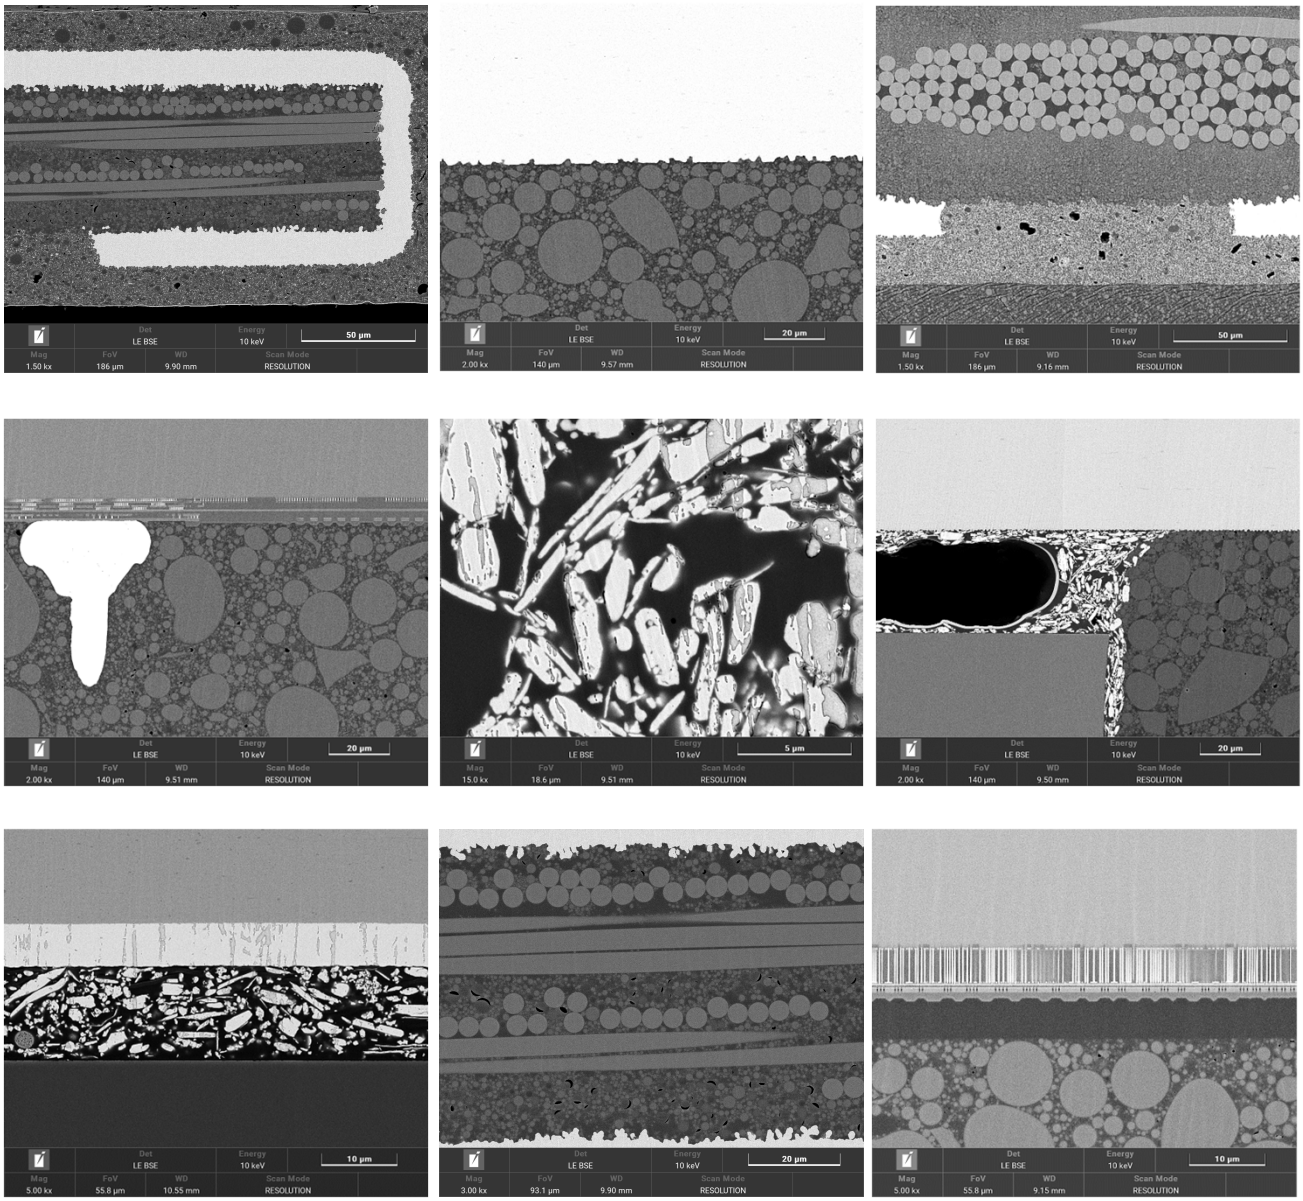

Cross – Section Applications : PCB & Wafer

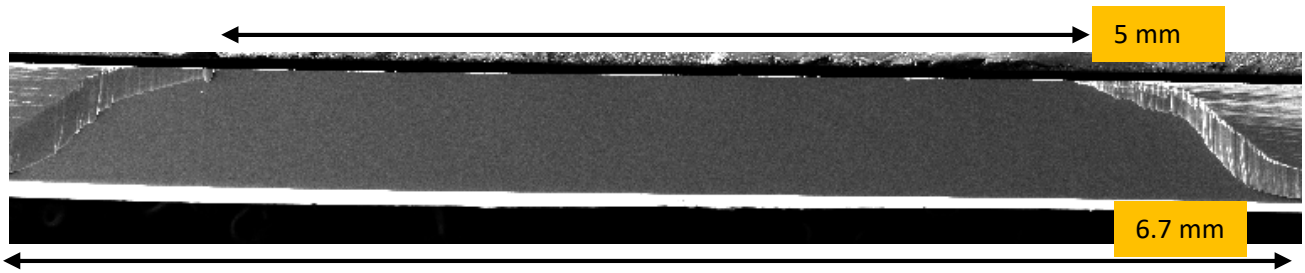

Large Area Milling : 18 kV / 5h / 0.5mm Thickness Si Wafer

Precision Beyond Limits: Delivering Impeccable Cross-Sections for Next-Generation Electronics and Semiconductor Analysis.