




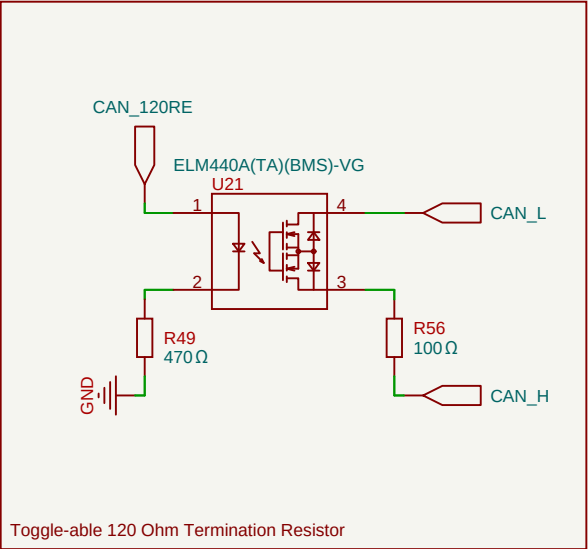


Toggle-able 120 Ohm Termination Resistor

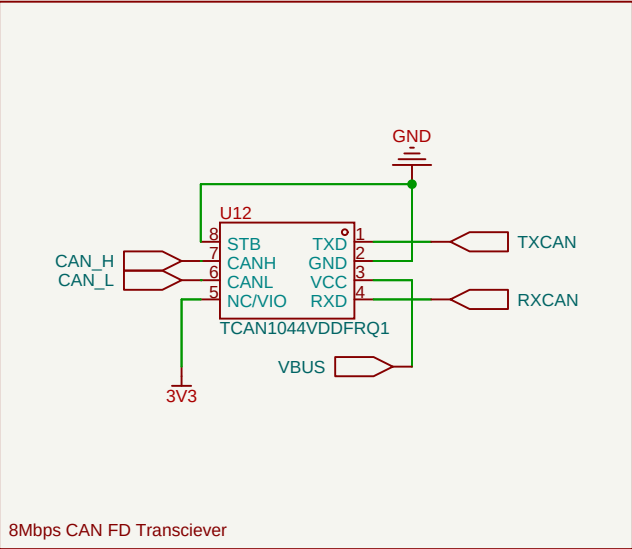


8Mbps CAN FD Transceiver

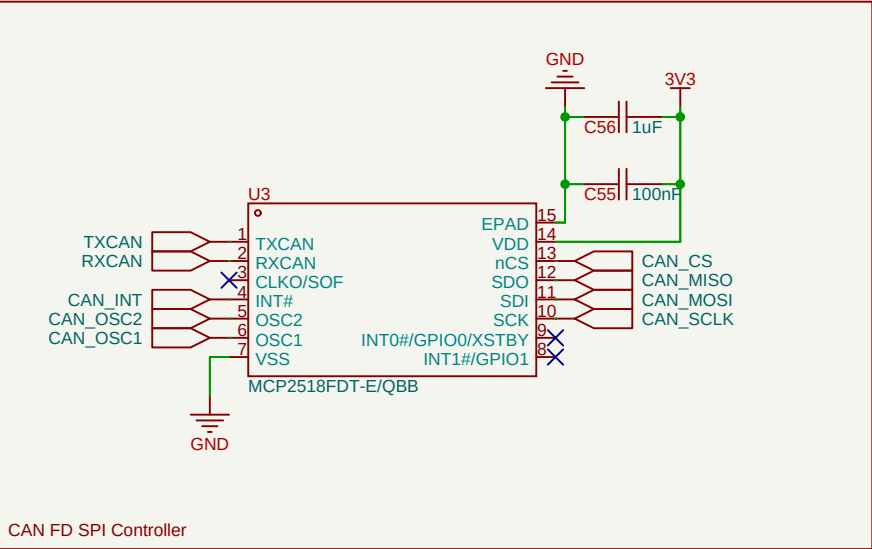


CAN FD SPI Controller

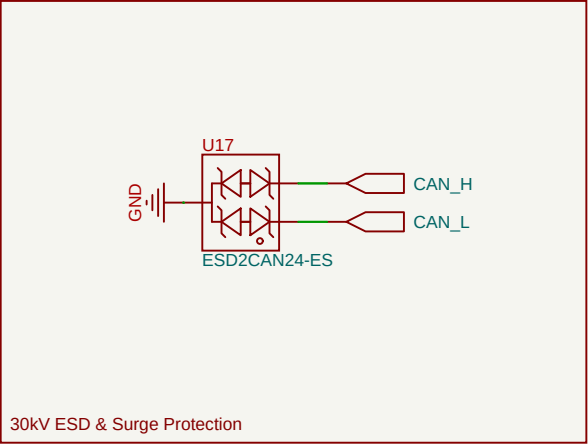


30kV ESD & Surge Protection

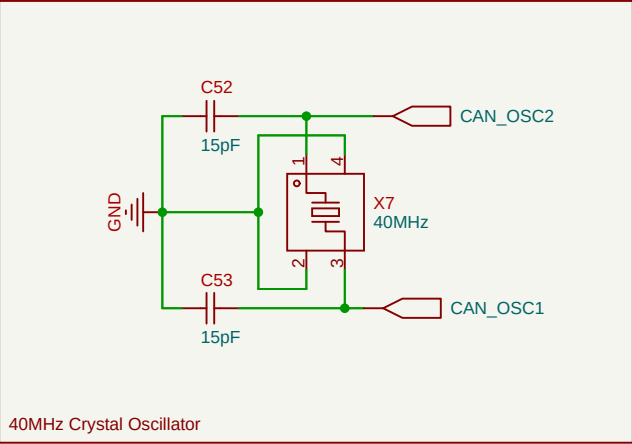


40MHz Crystal Oscillator


Page	CAN_FD		Create at	2025-11-01
Schematic	Schematic1		Update at	2026-05-15
Board	Board1		Page	CAN_FD
Drawn	Leo Walker		Reviewed	
	can fd usb module			
	Version	Size	Page 1	Total 4
	1.0	A4	Leo Walker	

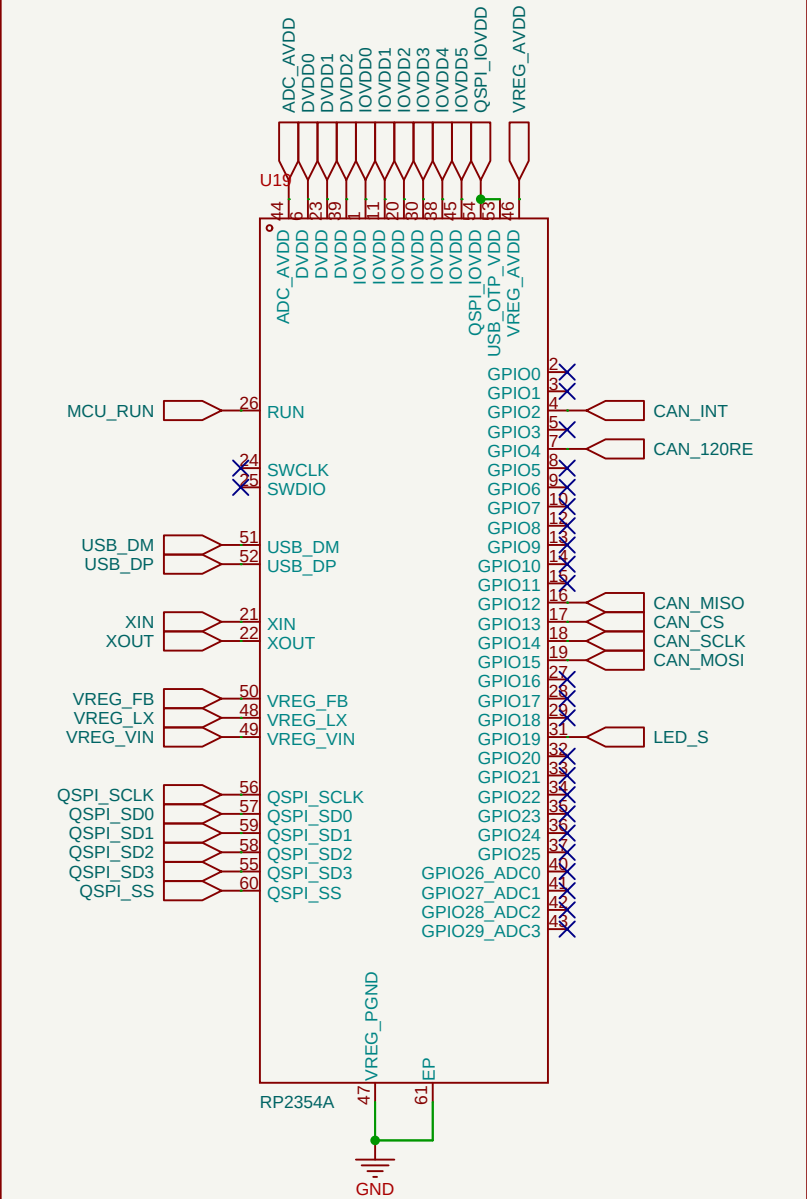


MCU RP2354A

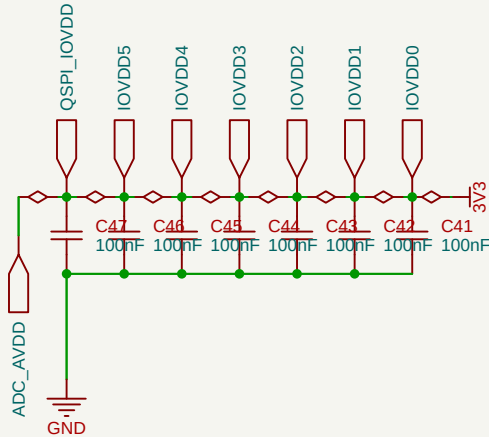


3V3 Decoupling Capacitors

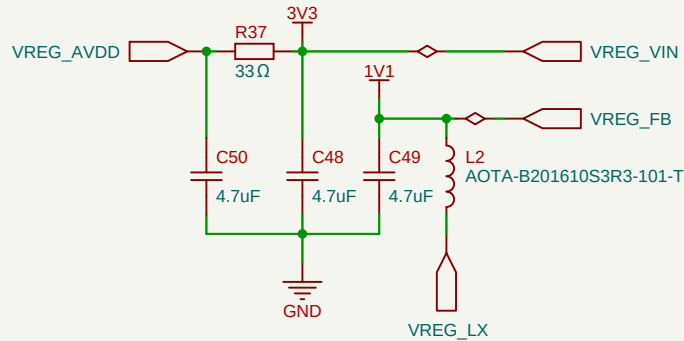


External Core Regulator Components

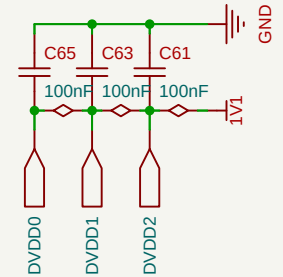

1V1 Decoupling Capacitors

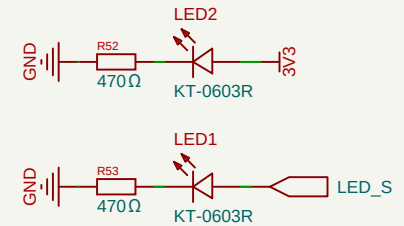




Status Indicators

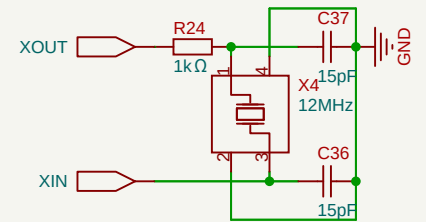


12MHz Crystal Oscillator


Page	MCU		Create at	2025-11-01
Schematic	Schematic1		Update at	2026-05-15
Board	Board1		Page	MCU
Drawn	Leo Walker		Reviewed	
	can fd usb module			
	Version	Size	Page 2	Total 4
	1.0	A4	Leo Walker	

CAN Bus 2-pin Picoblade

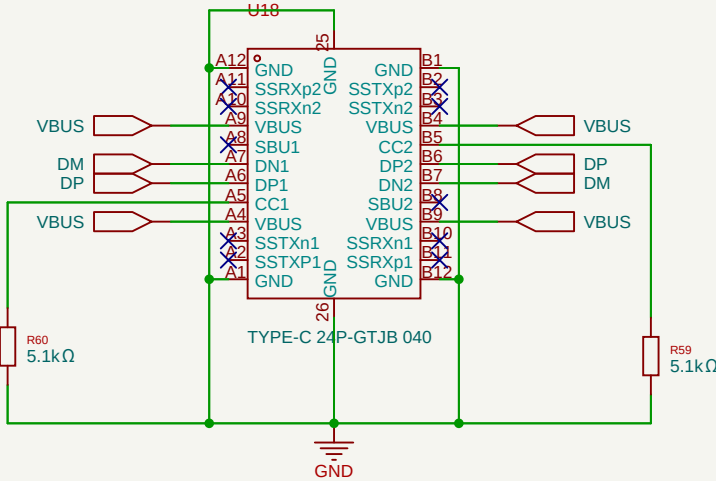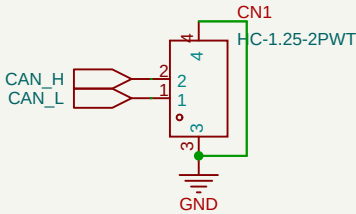

USB C Male Connector

Page	Interfaces		Create at	2025-11-01
Schematic	Schematic1		Update at	2026-05-15
Board	Board1		Page	Interfaces
Drawn	Leo Walker		Reviewed	
	can fd usb module			
	Version	Size	Page 3	Total 4
	1.0	A4	Leo Walker	

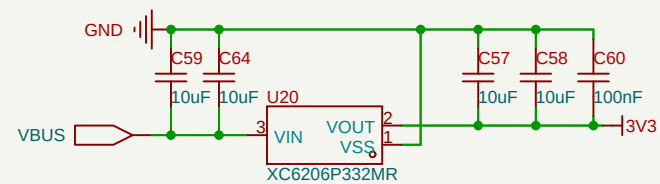

Page	Power		Create at	2025-11-28
Schematic	Schematic1		Update at	2026-05-15
Board	Board1		Page	Power
Drawn			Reviewed	
	can fd usb module			
	Version	Size	Page 4	Total 4
	V1.0	A4	EasyEDA.com	