


MOVA Tools
Site Configuration
Version: 3.2.0.482 [3-Dec-2019] © Copyright TRL Limited, 2023
For sales and distribution information, program advice and maintenance, contact TRL: +44 (0)1344 770758 software@trl.co.uk www.trlsoftware.co.uk
The users of this computer program for the solution of an engineering problem are in no way relieved of their responsibility for the correctness of the solution

Filename: Lower Bristol Road_F.mova

Path: C:\Users\mine.goktas\Yunex\Consultancy Services UK - Projects\Projects - Live\871253633 - Lower Bristol Rd by Oak Street, Bath-MOVA\Site Validation\MOVA

Report generation date: 16/11/2023 17:25:21

Site diagram

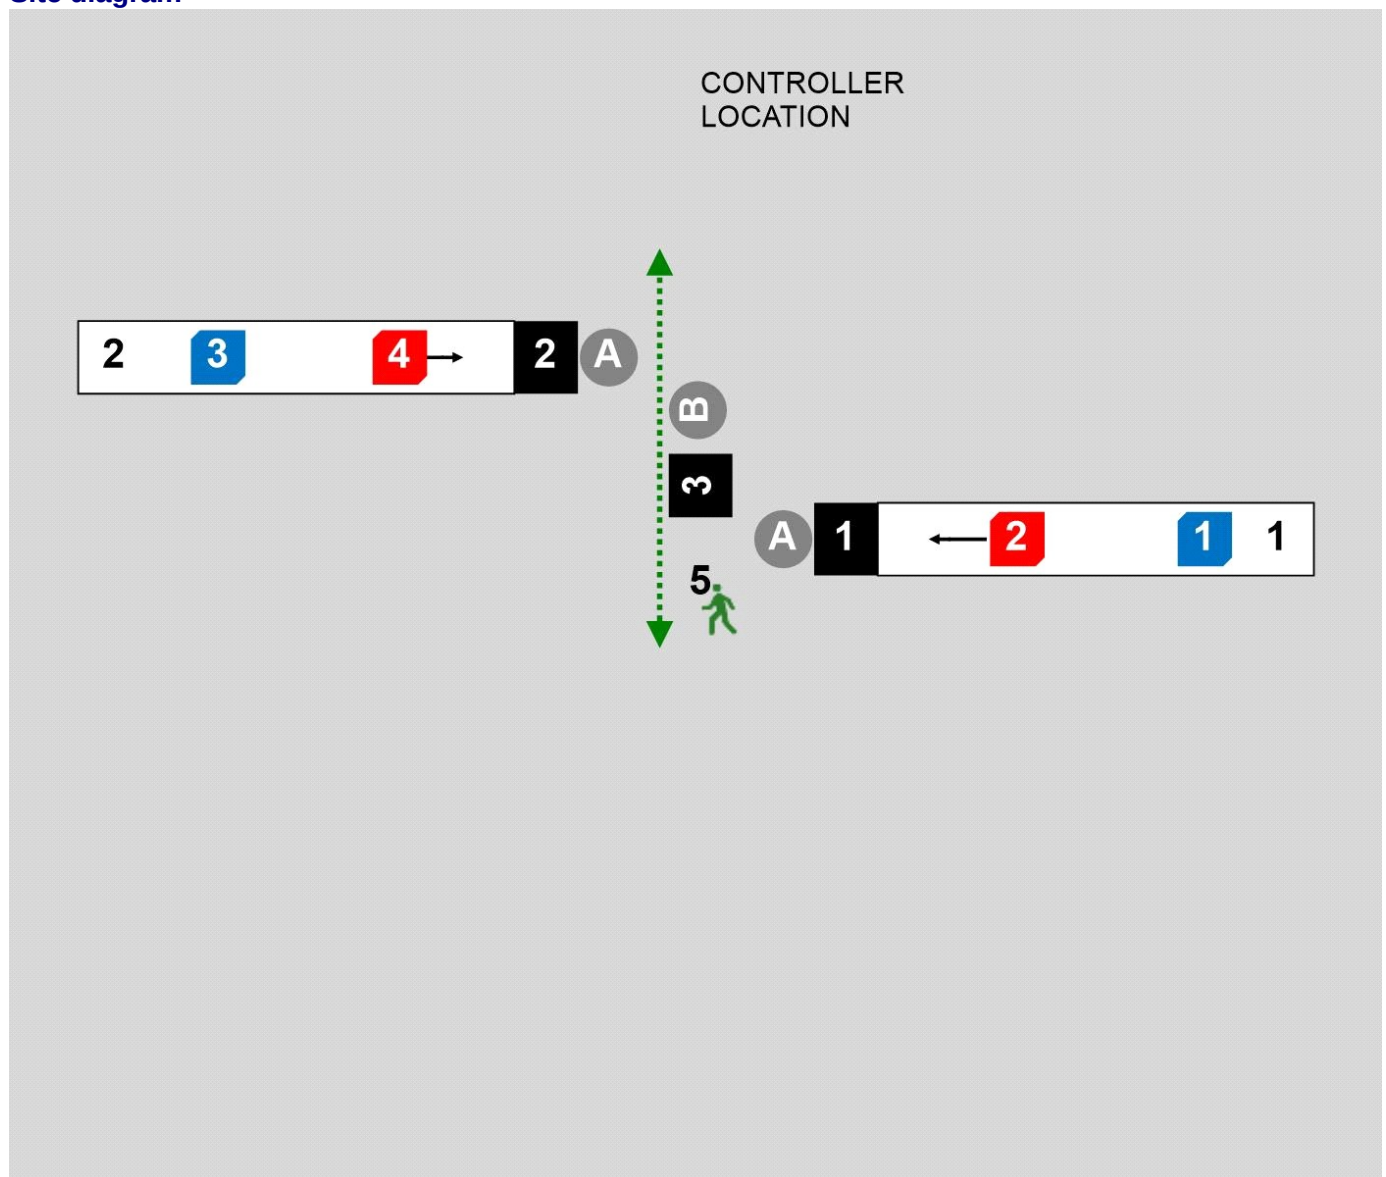

Data Plan 1 - (untitled)

Controller details

MOVA Controller 1

ID	1
MOVA Version	M8.0
Name	LowerBristolRd_F
Description	Puffin
Main Stage [MAINST]	1
Total Green Limit [TOTALG] (s)	40
Detector ON [DETON]	Closed circuit
Stage Confirm ON [STAGON]	Open circuit
Phase Confirm ON [PHASON]	Open circuit
Stage Demand ON [STGDEM]	Closed circuit

Phases

Phases

Phase ID	A	B
Name	Lower Bristol Road	Puffin
Phase Type	Traffic	Pedestrian
Associated Phase		
Minimum Green (s)	7.0	7.0
Interstage Behaviour [LPHASE]	Never runs during interstage	Never runs during interstage
Phase Confirm Channel [LPHASE]		

Phase Intergreen Matrix for Controller 1

	To		
		A	B
	From	A	B
	A	-	5
	B	10	-

Stages

Stages

Stage	1	2
Description	Traffic	Ped
Phases In Stage	A	B
Auto Set Stage Minimum	✓	✓
Stage Minimum [MIN] (s)	7.0	7.0
Stage Maximum [MAX] (s)	30.0	7.0
All Red Pedestrian Stage [REDPED]		✓

Stages: Pedestrians

Stage	1	2
Enable Pedestrian Short Cycling		
PEDMAX1 (s)		
PEDMAX2 (%)		

Stages: Alerts

Stage	1	2
Occupancy alert threshold (ON) [OCCUAL on]	9.90	9.90
Occupancy alert threshold (OFF) [OCCUAL off]	9.90	9.90


Interstage Matrix for Controller 1

	To		
		1	2
From	1	-	5
	2	10	-

Banned Stage transitions for Controller 1

	To		
		1	2
From	1	-	Allow
	2	Allow	-

Stages and phases for Controller 1

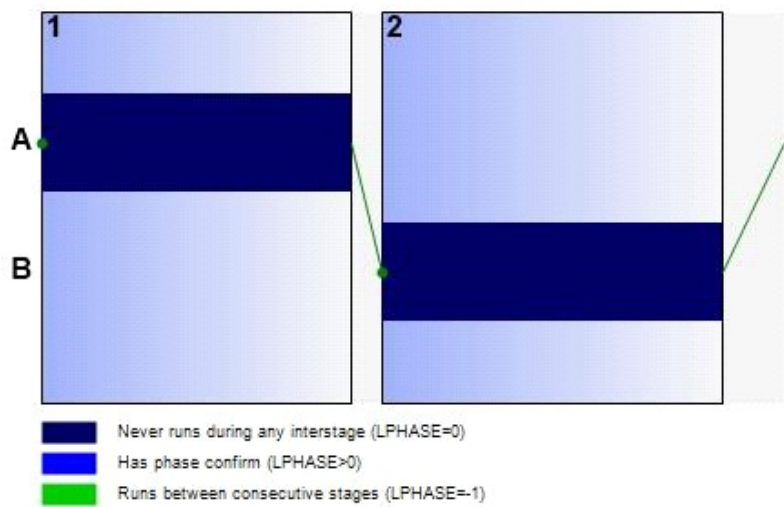

Stages for Controller 1

Stage 1	Stage 2	

LGREEN and SDCODE Matrix

LGREEN matrix

	Link			
Stage		1	2	3
	1	1	1	0
	2	0	0	1

SDCODE matrix

	Link			
Stage		1	2	3
	1	1	1	
	2			3

Links

Links

Link	1	2	3
Name	Lower Bristol Road	Lower Bristol Road	Puffin
Description	Eastbound Approach	Westbound Approach	Puffin
Lanes	1	2	
Phase	A	A	B
Link Type [LTYPE]	Traffic	Traffic	Pedestrian
Demand Channel			5
Latched			
Volumetric Detection			
Use Wait Channel			
Wait Channel [WAITCH]			
LPHASE_RAW	0	0	0
LTYPE_RAW	0	0	105

Link: Modelling

Link	1	2	3
Auto Set Link Minimum Green	✓	✓	✓
Link Minimum Green [LMIN] (s)	7.0	7.0	7.0
Link Maximum Green [LNKMAX] (s)	500.0	500.0	500.0
Auto Set Stop Penalty	✓	✓	
Heavy Vehicles (%)	40	40	
Stop Penalty [STOPEN] (s)	18.0	18.0	
Encourage Pedestrian Stage			Off
Auto-set End of Saturation Time	✓	✓	
End of Saturation Time [ESLMAX] (s)	30.0	30.0	
Auto Set Lost Time	✓	✓	
Lost Time [LOSTIM] (s)	13.0	13.0	

Link: Offside Turners

Link	1	2	3
Auto set MIXOUT	✓	✓	
Early cut-off demand type [MIXOUT]	Not applicable	Not applicable	-
Vehicles between X and OUT dets [MIXOUT] (veh)			

Link: Constants

Link	1	2	3
Auto Set	✓	✓	✓
MINPCS	50	50	50
Is Short Link [SHORTL]			
Number Of Main Lanes [NMAINL]	1	1	0

Lanes

Lanes

Lane	1	2
Name	Lower Bristol Road	Lower Bristol Road
Description	Eastbound Approach	Westbound Approach
Lane Type	Normal	Normal
Short Lane Length [DSHORT] (m)		
Lane Weighting Factor [LANEWF]	1	1
Cruise Speed [CSPEED] (m/s)	11.0	10.8
Enter headway?	✓	✓
Headway [SATINC] (s)	2.3	2.3
Saturation Flow (veh/hr)	1565	1565
Start-up Lost Time [STLOST] (s)	1.3	1.3
Saturation Flow Feedback [USESF]	Off	Off
Start-up Lost Time Feedback [USEST]	Off	Off

Lane: Detectors

Lane	1	2
X Detector ID [X]	2	4
X Detector distance [DX] (m)	39.0	39.0
IN Detector?	✓	✓
IN Detector ID [IN]	1	3
IN Detector distance [DIN] (m)	87.5	89.0
Auto Set	✓	✓
X Detector cruise time [CRUSX] (s)	3.0	3.0
X Detector queue clear time [MOVEQX] (s)	18.0	18.0
IN Detector cruise time [CRUSIN] (s)	7.5	8.0
IN Detector queue clear time [MOVQIN] (s)	29.0	29.5
Queue Detection Time [QMINON] (s)	6.0	6.0

Lane: Combination Detectors

Lane	1	2
COMB-X Detector present?		
COMB-X Detector ID [COMBX]		
Associated X Det 1 [ASSOCD-1]		
Associated X Det 2?		
Associated X Det 2 [ASSOCD-2]		
Auto Set COMTIM	✓	✓
Time To Use Combination [COMTIM] (s)		

Lane: Other Detectors

Lane	1	2
OUT Detector?		
OUT Detector ID		
IN-SINK Detector?		
IN-SINK Detector ID		
X-SINK Detector?		
X-SINK Detector ID		
STOPLINE Detector?		
STOPLINE Detector ID		
AutoSet ALT-UP	✓	✓
ALT-UP Detector?	✓	✓
ALT-UP Detector ID	1	3
ALT-DOWN Detector?		
ALT-DOWN Detector ID		
IN-SINK2 Detector?		
IN-SINK2 Detector ID		
X-SINK2 Detector?		
X-SINK2 Detector ID		

Lane: Oversaturation

Lane	1	2
Auto Set Critical Vehicle Count	✓	✓
Detector For Oversaturation Checking [XOSAT]	IN detector	IN detector
Critical Vehicle Count [OSATCC] (veh)	6	6
Critical Vehicle Count Compact [OSATCX] (veh)	5	5
Critical Vehicle Time [OSATTM]	14.0	14.0

Lane: Alerts

Lane	1	2
Enable Oversaturation Alert		
Oversaturation Cycles [OSATAL]		
Enable Exit Blocking Alert		
Exit Blocking Cycles [EXITAL]		

Lane: Advanced

Lane	1	2
Auto set Advanced Values	✓	✓
Max Minimum Green [MAXMIN] (s)	15.0	15.0
Utilised Amber Time [GAMBER] (s)	2.0	2.0
Saturation Flow Gap [SATGAP] (s)	1.5	1.5
Critical Gap [CRITG] (s)	3.5	3.5
Lengthened Critical Gap [PCRITG] (%)	0	0
Portion Of Critical Gap [RCRITG] (%)	0	0

Logging

Logging

Telephone Number	
TMA Logging Period [TMAPRD]	60

Logging: Error weighting

Error type	Weighting
Auto Set	✓
Faulty detector [2]	0
Stage not ended [3]	5
Intergreen not ended [4]	5
Invalid stage demanded [5]	5
Wrong stage confirmed [6]	5
Multiple stage confirms [14]	0
Watchdog routine [8]	5
Divide error [16]	5
Program error [11]	0

Logging: Saturation Flow Logs

Time Period	Start Time (HH:mm)	End Time (HH:mm)
Weekday Period 1	07:30	09:30
Weekday Period 2	16:30	18:30
Weekday Period 3	09:30	16:30
Weekday Period 4	18:30	22:00
Saturday	09:00	17:00
Sunday	10:00	16:00

Constants

Constants

Auto Set	SCAN	MINEXT (s)	MAXEXT (s)	ADDGAP	SUBGAP	NDETS	STAGES	NLINKS	NLANES
✓	0.5	3.0	8.5	0.5	0.5	5	2	3	2

Summary of Detectors and Confirms

Detectors

Detector	Detector Type	Link	Lane	Data Plan
1	N		1	
2	X		1	
3	N		2	
4	X		2	
5	Pedestrian	3		

Confirms

Confirm	Stage	Phase
1	1	
2	2	

Special Conditioning

No rules have been defined