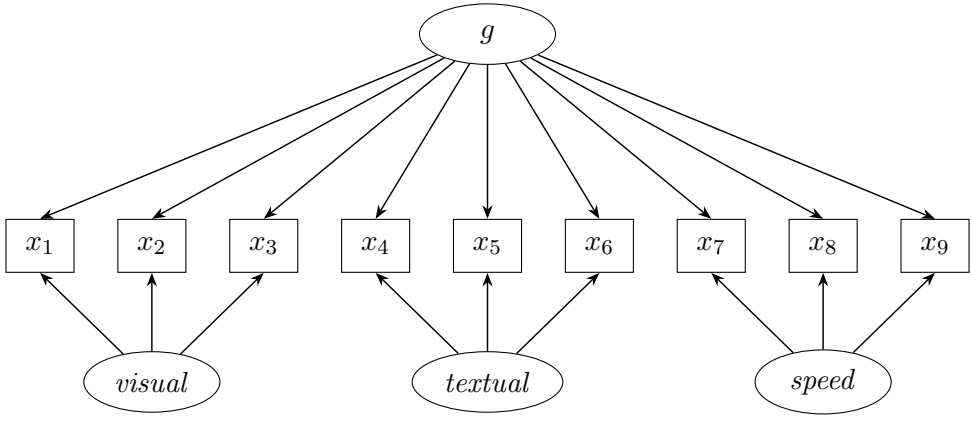


Bifactor model used in the timing comparison. Each indicator loaded on the general factor g and on one group factor. The four factors were mutually orthogonal, and their variances were fixed to one. The model had 36 free parameters, comprising 18 factor loadings, nine indicator residual variances, and nine observed intercepts.