
A12series ϕ 12×21.5L A12C-27-S

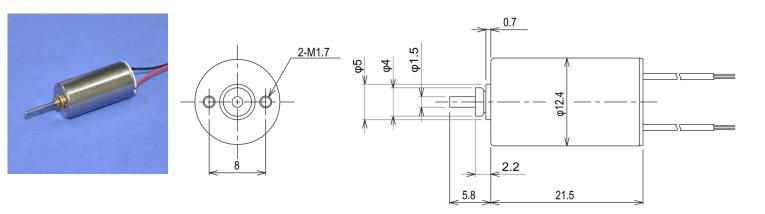


- Typical applications
- ·Industrial equipment
- ·Radio control
- · Medical equipment
- ·Office equipment

Specifications

Models Number	Rated Voltage	No Load Speed	No Load Current	Stall Current	Terminal Resistance	Stall Torque	Starting Voltage	Max. Efficiency	Max. Power	Rotor Inertia	Mech. Time Constant	Weight
	٧	rpm	mA	mA	Ω	mN•m	٧	%	w	g•cm ²	m•sec	g
A12C-27-S	7.4	26,500	90	3,610	2.05	9.15	0.1	70.9	6.35	0.18	5.4	12

Characteristic curve



URL: http://cik-ele.jp/en/motor/

TEL: +81-3-6711-3934 FAX: +81-3-6711-3602