

Software Requirements Specification for CEWS System: Data Separability Measurement

Lesley Wheat

February 3, 2023

Contents

1	Reference Material	iii
1.1	Table of Units	iii
1.2	Table of Symbols	iii
1.3	Abbreviations and Acronyms	iii
1.4	Mathematical Notation	iii
2	Introduction	1
2.1	Purpose of Document	1
2.2	Scope of Requirements	2
2.3	Characteristics of Intended Reader	2
2.4	Organization of Document	2
3	General System Description	2
3.1	System Context	2
3.2	User Characteristics	3
3.3	System Constraints	3
4	Specific System Description	3
4.1	Problem Description	3
4.1.1	Terminology and Definitions	4
4.1.2	Physical System Description	4
4.1.3	Goal Statements	4
4.2	Solution Characteristics Specification	4
4.2.1	Assumptions	4
4.2.2	Theoretical Models	5
4.2.3	General Definitions	5
4.2.4	Data Definitions	6
4.2.5	Instance Models	6
4.2.6	Input Data Constraints	7
4.2.7	Properties of a Correct Solution	9
5	Requirements	9
5.1	Functional Requirements	9
5.2	Nonfunctional Requirements	9
6	Likely Changes	10
7	Traceability Matrices and Graphs	10
	References	12

Revision History

Date	Version	Notes
2023-01-24	0.0	Creation
2023-02-01	0.1	Revise Instance Models
2023-02-03	1.0	Version 1 Release

1 Reference Material

This section records information for easy reference.

1.1 Table of Units

Throughout this document no units are used.

1.2 Table of Symbols

The table that follows summarizes the symbols used in this document along with their units. The choice of symbols was made to be consistent with the heat transfer literature and with existing documentation for solar water heating systems. The symbols are listed in alphabetical order.

Symbol	Unit	Description
$I(...)$	N/A	Indicator Function
J_N	N/A	Normalized Multiclass Cut Edge Weight Measurement

1.3 Abbreviations and Acronyms

Symbol	Description
A	Assumption
CEWS	Cut Edge Weight Statistic
DD	Data Definition
GD	General Definition
GS	Goal Statement
IM	Instance Model
LC	Likely Change
PS	Physical System Description
R	Requirement
RNG	Relative Neighbourhood Graph
SRS	Software Requirements Specification
T	Theoretical Model

1.4 Mathematical Notation

This document uses notation used in [1].

2 Introduction

Classification is a common machine learning problem and there are many techniques for solving classification problems. Unfortunately, not all classification problems are easy and it can be difficult to explain why classifiers perform poorly on certain datasets. Data complexity has been defined as a characteristic of the data that relates to the difficulty of the classification problem [2]. To further refine this definition, we consider data complexity to be represented by aspects of the data that introduce difficulty for the classifiers.

One of these aspects is separability, an intrinsic characteristic that describes how the data points from different classes mix together [3]. A classic measurement for separability is Fraction of Points on Class Boundary. Based on the work of Friedman and Rafsky [4] and documented by Basu and Ho[5], this measurement constructs a minimum spanning tree over the dataset then calculates the number of points with a connection to another class over all points.

The Cut Edge Weight Statistic measurement [1] is a variation of the Fraction of Points on Class Boundary, proposed by Zighed et al. The algorithm for the normalized measurement begins by constructing a Toussaint's Relative Neighbourhood Graph [6] over the entire dataset then computing the number of edges which connect different classes (the "cut edges") over the total number of edges. This measurement is a viable way of measuring separability because it has a high coefficient of determination (R^2) with the mean error rate of several classifiers.

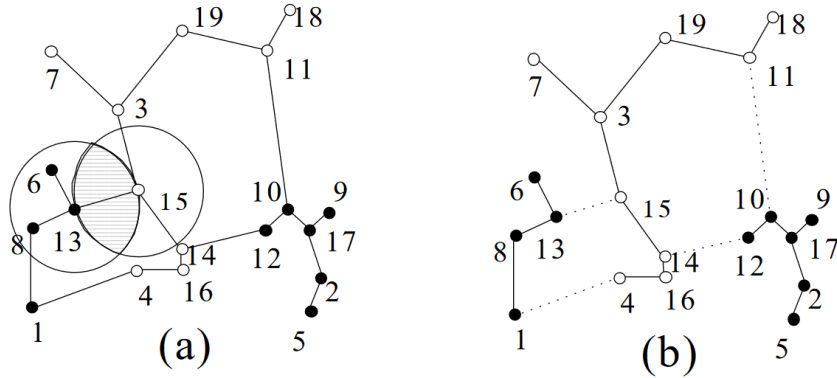


Figure 1: An visualization of the RNG for a binary classification problem represented by black and white points. (a) An example of a 2D RNG graph construction. (b) Identifying cut edges with dotted lines.

The introduction contains the purpose of this document, the scope of requirements, characteristics of the indented reader and the organization of this complete document.

2.1 Purpose of Document

The purpose of this document is to provide information about the design and functionality of CEWS System to the Intended Reader (Section 2.3).

2.2 Scope of Requirements

The domain of this problem is restricted to generating the normalized multiclass CEWS Measurement [1]. Notable exclusions include the calculation of a p-value, variations of the calculation using different weighing parameters and different graph generation algorithms. The scope excludes asymptotic cost limitations and efficiency requirements.

2.3 Characteristics of Intended Reader

The reader should have a good understanding of classification (graduate level) and a base understanding of data analysis, machine learning and statistics.

2.4 Organization of Document

This document includes a general system description, a specific system description, a requirements section, a section on likely changes, a section on unlikely changes and a section on traceability.

3 General System Description

This section provides general information about the system. It identifies the interfaces between the system and its environment, describes the user characteristics and lists the system constraints.

3.1 System Context

The CEWS System will exist as a standalone product or as a module. The system context is illustrated in Figure 2.

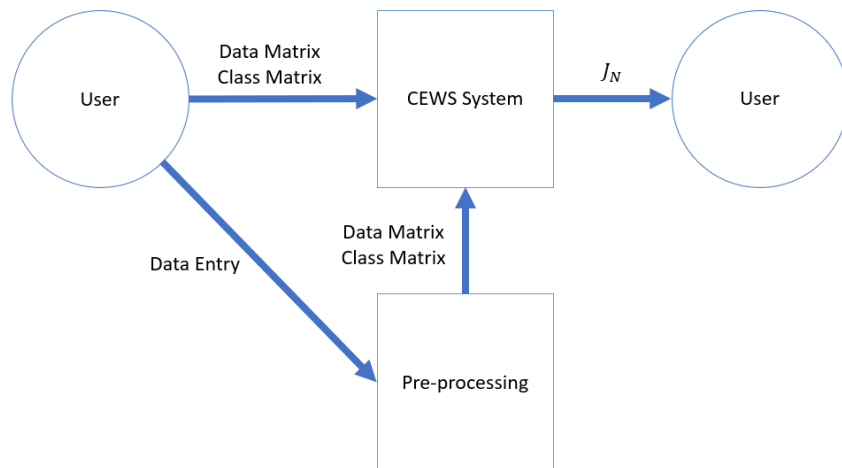


Figure 2: System Context

- User Responsibilities:
 - Provide the data.
 - Correctly format the input data matrices as per Section 4.2.6.
 - Resource management including supplying the system with enough resources to support the size of their dataset.
 - Understand the problem.
 - Perform any data pre-processing required for the relevant classification problem such as transformations, feature extraction, etc.
 - Understand the CEWS algorithm.
 - Understand the limitations of numerical computation.
- CEWS System Responsibilities:
 - Read input data.
 - Detect data type mismatch or if input data violates any constraints.
 - Perform the analysis.
 - Perform basic error checking on the output.
 - Return the output value.

3.2 User Characteristics

The end user of CEWS System should have a good understanding of classification and machine learning, preferably with an undergraduate degree in software or math.

3.3 System Constraints

At this time, there are no known constraints for this system..

4 Specific System Description

This section first presents the problem description, which gives a high-level view of the problem to be solved. This is followed by the solution characteristics specification, which presents the assumptions, theories, definitions and finally the instance models.

4.1 Problem Description

CEWS System is intended to solve the calculation of the normalized multiclass CEWS measurement for a dataset.

4.1.1 Terminology and Definitions

This subsection provides a list of terms that are used in the subsequent sections and their meaning, with the purpose of reducing ambiguity and making it easier to correctly understand the requirements:

- Data point/Example/Samples: An identifiable element in a data set which has features associated with it.
- Data set: A set of examples from a population.
- Feature : An individual measurable property of an example.
- Class Label : Represents the class an example belongs to.
- Classification: The problem of identifying which of a set of categories an example belongs to.
- Data complexity: Aspects of the data that classifiers have difficulty with. [2]
- Separability: An intrinsic characteristic of a dataset and describes how the data points from different classes mix together. [3]
- Boolean variable : A variable that has one of two possible values.

4.1.2 Physical System Description

There is no physical system.

4.1.3 Goal Statements

Given the dataset, the goal statements are:

GS1: Calculate the normalized multiclass CEWS measurement.

4.2 Solution Characteristics Specification

The instance models that govern CEWS System are presented in Subsection 4.2.5. The information to understand the meaning of the instance models and their derivation is also presented, so that the instance models can be verified.

4.2.1 Assumptions

This section simplifies the original problem and helps in developing the theoretical model by filling in the missing information for the physical system. The numbers given in the square brackets refer to the theoretical model [T], general definition [GD], data definition [DD], instance model [IM], or likely change [LC], in which the respective assumption is used.

- A1: All rational numbers can be represented in a base 2 computer system. Operations performed on rational numbers in a computer system is exact. Any computation rounding error is negligible and does not need to be taken into account.
- A2: Class labels are represented as whole numbers. All examples from one class share the same class label.
- A3: Each example has the same number of features. No features are null.
- A4: The user does not want to use weights for the edge calculation.
- A5: The user wants to use a relative neighbourhood graph as the base graph.
- A6: The user doesn't want the statistic p-value.

4.2.2 Theoretical Models

No theoretical models are used.

4.2.3 General Definitions

This section collects and equations that will be used in building the instance models.

Number	GD1
Label	Toussaint's Relative Neighbourhood Graph
SI Units	N/A
Equation	$E_{RNG}(P, i, j) = [d(p_i, p_j) \leq \max(d(p_i, c), d(p_j, c)) \forall c]$ where $c \in P, c \neq p_i, c \neq p_j$ Connection matrix: $V = (v_{ij}), i = 1, 2, \dots, n; j = 1, 2, \dots, n;$ where $v_{ij} = I(E_{RNG}(P, i, j))$
Description	RNG is an undirected graph constructed by connecting an edge between two points when a third point does not exist that is closer to both. P is a set of n points in real space with dimensions m. V is the connection matrix where $v_{ij} = 1$ if there is an edge and $v_{ij} = 0$ if not. $d(a, b)$ is the Euclidean distance between points a and b given by DD1.
Source	[1]
Ref. By	IM1

4.2.4 Data Definitions

This section collects and defines all the data needed to build the instance models. The dimension of each quantity is also given.

Number	DD1
Label	Euclidean distance
Symbol	$d(a, b)$
SI Units	N/A
Equation	$d(a, b) = \sqrt{\sum_{i=1}^n (a_i - b_i)^2}$
Description	$d(a, b)$ is the Euclidean distance between points a and b in Euclidean space with n dimensions. a_i and b_i are Euclidean vectors from the origin.
Sources	N/A
Ref. By	GD1

4.2.5 Instance Models

This section transforms the problem defined in Section 4.1 into one which is expressed in mathematical terms. It uses concrete symbols defined in Section 4.2.4 to replace the abstract symbols in the models identified in Sections 4.2.2 and 4.2.3. The goals are solved by IM1, which is the implementation of the cut edge weight statistic measurement.

Number	IM1
Label	Multiclass Normalized Cut Edge Weight Measurement
Input	The input data matrix, D , and the class label matrix, C , based on 4.2.6.
Output	$J_N, 0 \leq J_N \leq 1$, such that $J_N = \frac{J}{I+J}$ where $J = \sum_{r=1}^{k-1} \sum_{s=r+1}^k J_{r,s}; 0 \leq J \leq n^2$ $J_{r,s} = \sum_{i=1}^n \sum_{j=1}^n V_{ij} \times I(c_i = r \ \& \ c_j = s)$ $I = \sum_{r=1}^k I_r, 0 \leq I \leq n^2$ $I_r = \sum_{i=1}^{n-1} \sum_{j=i+1}^n V_{ij} \times I(c_i = r \ \& \ c_j = r)$
Description	The above equation gives the formula for calculating the the multiclass normalized cut edge weight measurement. k is the number of classes. V_{ij} is the RNG connection matrix for matrix D given by GD1.
Sources	[1] [7]
Ref. By	None

4.2.6 Input Data Constraints

Table 1 shows the data constraints on the input output variables. The column for physical constraints gives the physical or theoretical limitations on the range of values that can be taken by the variable. The column for software constraints restricts the range of inputs to reasonable values. The software constraints will be helpful in the design stage for picking suitable algorithms. The constraints are conservative, to give the user of the model the flexibility to experiment with unusual situations. The column of typical values is intended to provide a feel for a common scenario. The uncertainty column provides an estimate of the confidence with which the physical quantities can be measured.

The matrices D and C must be iterable objects. n is the number of examples. m is the number of features. The input data matrix, D , is of size $n \times m$ and must contain rational numbers. D is formatted as:

$$D_{n \times m} = \begin{bmatrix} d_{11} & d_{12} & \cdots & d_{1m} \\ d_{21} & d_{22} & \cdots & d_{2m} \\ \vdots & \vdots & \ddots & \vdots \\ d_{n1} & d_{n2} & \cdots & d_{nm} \end{bmatrix}$$

So row i , d_i , contains sample i . The input class matrix, C , is of size $n \times 1$ and must contain natural numbers. C is formatted as:

$$C = \begin{bmatrix} c_1 \\ c_2 \\ \vdots \\ c_n \end{bmatrix}$$

Where c_i is the label for sample i of matrix D . It is the user's responsibility to set c_i to the class of d_i .

The size of n and m are limited based on the system hardware but not by CEWS itself. It is the user's responsibility to insure that their system has the relevant requirements to support their dataset size.

Table 1: Input Variables

Var	Constraints	Software Constraints	Typical Value	Uncertainty
d_{ij}	$d_{ij} \in \mathbb{R}$	$d_{ij} \in \mathbb{Q}, F_{\min} \leq d_{ij} \leq F_{\max}$	N/A	N/A
c_i	$c_i \in \mathbb{N}$	$W_{\min} \leq c_i \leq W_{\max}$	N/A	N/A
n	$n \in \mathbb{N}, n > 0$	N/A	N/A	N/A
m	$m \in \mathbb{N}, m > 0$	N/A	N/A	N/A

Table 2: Specification Parameter Values

Var	Value
$F_{\min}$	$-(2 - 2^{-23})2^{127}$
$F_{\max}$	$(2 - 2^{-23})2^{127}$
$W_{\min}$	0
$W_{\max}$	$2^8 - 1$

4.2.7 Properties of a Correct Solution

A correct solution must exhibit the following behaviour

Table 3: Output Variables

Var	Physical Constraints
J_N	$0 \leq J_N \leq 1$ (by A1)

5 Requirements

This section provides the functional requirements, the business tasks that the software is expected to complete, and the nonfunctional requirements, the qualities that the software is expected to exhibit.

5.1 Functional Requirements

R1: CEWS System will read the input data.

- Any constraint in 4.2.6 is violated then CEWS System will generate an appropriate error message.
- The input matrices are formatted as iterable objects.

R2: After reading the input data, CEWS System will preform the calculation in IM1.

R3: The CEWS System should generate an error if the calculation result exceeds the constraints in 4.2.7.

R4: The CEWS System will generate an output.

- In case an error occurs, an error should be raised by the program.
- In case no error occurs, no error should be raised and J_N will be returned as a float type.

5.2 Nonfunctional Requirements

NFR1: **Accuracy** As per A1, any calculation error should be negligible. The accuracy of the computed solutions should meet the level needed for data analysis. The absolute error should be less than 0.01.

NFR2: **Usability** A program should be able to call CEWS System by calling a function of the form $\text{CEWS}(D, C)$ and CEWS System should return the output as described in R4.

NFR3: **Maintainability** The program code should be readable and clear.

NFR4: **Portability** The software should run on the Windows 11 operating system.

6 Likely Changes

LC1: The addition of user options such as option to weigh the edge calculations: IM1.
Related to: A4.

LC2: The addition of user options such as option to change the algorithm for graph construction: IM1. Related to: A5.

LC3: Changes to the output format. Related to: A6.

7 Traceability Matrices and Graphs

The purpose of the traceability matrices is to provide easy references on what has to be additionally modified if a certain component is changed. Every time a component is changed, the items in the column of that component that are marked with an “X” may have to be modified as well. Table 5 shows the dependencies of theoretical models, general definitions, data definitions, and instance models with each other. Table 6 shows the dependencies of instance models, requirements, and data constraints on each other. Table 4 shows the dependencies of theoretical models, general definitions, data definitions, instance models, and likely changes on the assumptions.

	A1	A2	A3	A4	A5	A6
GD1	X		X			
DD1	X					
IM1	X	X	X	X	X	X
LC1				X		
LC2					X	
LC3						X

Table 4: Traceability Matrix Showing the Connections Between Assumptions and Other Items

	GD1	DD1	IM1
GD1		X	X
DD1	X		
IM1	X		

Table 5: Traceability Matrix Showing the Connections Between Items of Different Sections

	IM1
IM1	
R1	X
R2	X
R3	X
R4	X

Table 6: Traceability Matrix Showing the Connections Between Requirements and Instance Models

References

- [1] D. A. Zighed, S. Lallich, and F. Muhlenbach, “A statistical approach to class separability,” *Applied Stochastic Models in Business and Industry*, vol. 21, no. 2, pp. 187–197, Mar. 2005. [Online]. Available: <https://onlinelibrary.wiley.com/doi/10.1002/asmb.532>
- [2] J. Luengo and F. Herrera, “An automatic extraction method of the domains of competence for learning classifiers using data complexity measures,” *Knowledge and Information Systems*, vol. 42, no. 1, pp. 147–180, Jan. 2015. [Online]. Available: <http://link.springer.com/10.1007/s10115-013-0700-4>
- [3] S. Guan and M. Loew, “A Novel Intrinsic Measure of Data Separability,” Sep. 2021, arXiv:2109.05180 [cs, math, stat]. [Online]. Available: <http://arxiv.org/abs/2109.05180>
- [4] J. H. Friedman and L. Rafsky, “Multivariate Generalizations of the Wald-Wolfowitz and Smirnov Two-Sample Tests,” *The Annals of Statistics*, vol. 7, no. 4, pp. 697–717, 1979. [Online]. Available: <https://www.jstor.org/stable/2958919>
- [5] T. K. Ho and M. Basu, “Complexity measures of supervised classification problems,” *IEEE Transactions on Pattern Analysis and Machine Intelligence*, vol. 24, no. 3, pp. 289–300, Mar. 2002, conference Name: IEEE Transactions on Pattern Analysis and Machine Intelligence.
- [6] G. T. Toussaint, “The relative neighbourhood graph of a finite planar set,” *Pattern Recognition*, vol. 12, no. 4, pp. 261–268, Jan. 1980. [Online]. Available: <https://linkinghub.elsevier.com/retrieve/pii/0031320380900667>
- [7] J. Jaromczyk and G. Toussaint, “Relative neighborhood graphs and their relatives,” *Proceedings of the IEEE*, vol. 80, no. 9, pp. 1502–1517, Sep. 1992. [Online]. Available: <http://ieeexplore.ieee.org/document/163414/>